

**HEAVY LIFT?
YOU GOT THIS.**

1-800-831-LIFT (5438)

**WWW.RGCHOISTING.COM
SALES@RGCHOISTING.COM**

WELCOME

Welcome to RGC Hoisting, your trusted source for expanding your business with hoists and roofing equipment that grow with you.

We offer platform and swing hoists to suit residential and commercial job sites. They are manufactured in the United States as the most durable, rugged equipment for your hard-working crews.

For traditional roofers, we have platform hoists capable of lifting up to 400 pounds safely and securely. If your business works on environmentally friendly or conscious projects, we have the manually operated HandiHoist and solar panel carriers to help your clients go green without breaking a single pane.

Have heavier lifting to do? We've got swing hoists with gravel buckets powered by hydraulic lifting and lowering for easy, stress-free use when transporting up to 2,000 pounds of materials.

With a full line of accessories, adaptations and add-ons, RGC Hoisting has all the equipment you need to rise above the competition and win the contract.

Whatever your hoisting and lifting needs, with RGC, You Got This.

Prices and products subject to change without notice. Freight F.O.B. Buffalo, N.Y.

TABLE OF CONTENTS

● Picking Your Power Drive	PAGE 2
● PRO Platform Hoists	PAGES 3-4
● Classic Platform Hoists	PAGE 5
● Platform Hoist Options	PAGES 6-7
● Roofing Options	PAGE 8
● Pivoting Platform Hoist and HandiHoist	PAGES 9-10
● Swing Hoists	PAGES 11-12
● Swing Hoist Options	PAGE 13
● Hoisting HydraPaks	PAGE 14
● Ground-Mounted and Trolley Hoists	PAGES 15-16
● Swing and Trolley Hoist Options	PAGES 17-18

OUR QUALITY PLEDGE TO YOU

At RGC, quality is more than a word — it's a standard by which we promise to work, to consistently manufacture the best product for the most demanding environments. We continually invest in our processes, technology and people to bring the highest quality to every customer worldwide.

RGC HOISTING

1849 Harlem Road | Buffalo, NY 14212
1-800-831-LIFT (5438) | 716-895-1547 (fax)
www.rgchoisting.com | sales@rgchoisting.com



1-800-831-LIFT (5438) **WWW.RGCHOISTING.COM**

PICKING YOUR POWER DRIVE

RESIDENTIAL OR COMMERCIAL, WE HAVE THE POWER DRIVE TO SUPPORT YOUR WORK SITE.

The right equipment gives you the ability to take on any job. Having the right power drive means the job can be completed on time, on budget and without any hiccups or unforeseen complications.

BUT WHICH POWER DRIVE IS RIGHT FOR YOUR WORK?

RGC Classic power drives sit higher on the track, making them a perfect choice for those who work predominantly in residential and community job sites where landscaping could pose an obstacle. With clutch and brake handles on the bottom of the drive, you won't have to reach up and over to operate your hoist.

RGC PRO power drives come equipped with wheels for easy mobility around a job site. A single handle at hip height offers easy control of whatever you're lifting. PRO Power drives also allow easier speed regulation for lifting and lowering loads, providing additional safety for your crew.

HandiHoists offer an environmentally friendly option for job sites where noise and emissions are a concern. Operated by a 24" hand wheel, HandiHoists are manually controlled and provide easy lifting and quiet operation in restrictive work sites or where power is limited.



Handi Hoist



RGC PRO

RGC Classic

SELECT THE RIGHT TRACK PACKAGE

WHICH TRACK PACKAGE IS RIGHT FOR YOU?

From 12' to 44' — with RGC you can select the track package perfect for your needs. Do you want an 8' base to transport in the back of a pick-up? Or do you want the traditional 16' base so you are taking fewer pieces with you on the job?

SELECT THE TRACK PACKAGE THAT WORKS BEST FOR YOU AND YOUR CREW:

TRACK LENGTH	OPTION A	OPTION B
12 ft.	8 ft. base with 4 ft. track	N/A
16 ft.	16 ft. base	8 ft. base with 8 ft. track
28 ft.	16 ft. base; 8 ft. and 4 ft. track	8 ft. base, two-8 ft. tracks and 4 ft. track
44 ft.	16 ft. base; 16 ft., 8 ft. and 4 ft. track	8 ft. base, four-8 ft. tracks and 4 ft. track

*Option B with 8' base = \$50 price increase



Base Unit with feet

Track units in three lengths



Solar Panel Carrier Attachment



Solar Panel Carrier Attachment

PRO PLATFORM HOISTS

EASY MOBILITY WHEN YOUR CREW IS SPREAD ACROSS A JOB SITE

When your crew is working on a large job site and needs to pay attention to tasks spread out over a large area, RGC's PRO Platform Hoists are your go-to option.

The best single-handle platform hoist on the market is engineered for professional roofers with their safety in mind. PRO Platform Hoists assemble easily and quickly without requiring special tools.

RGC's PRO Platform Hoists feature:

- Easy mounting to second and third track cross ties without needing to lift into place
- A single long handle to control the hoist safely with minimal effort
- Easier speed regulation for lifting and lowering loads for improved safety

PRO Platform Hoists come in your choice of gas or electric power for outdoor or indoor operation.



Pro & Classic Drive Hoist Specs		
	400	200
Load Capacity	400 lbs.	200 lbs.
Lift Speed	110 fpm	220 fpm
Platform Size	24 in. x 24 in.	17 in. x 18 in.
Track (3 - 3/4 in. Side Rail)	24 in. wide	17 in. wide

PRO Platform Hoist (200 Lb. Capacity)		
Part #	Description	Weight
0456810	Platform Hoist 200 PRO G 12 ft. w/ 4 hp B & S gas engine	243 lbs.
0456811	Platform Hoist 200 PRO HG 12 ft. w/ 4 hp Honda gas engine	249 lbs.
0456809	Platform Hoist 200 PRO E 12 ft. w/ 1-1/2 hp electric motor	270 lbs.
0456800	Platform Hoist 200 PRO G 16 ft. w/ 4 hp B & S gas engine	252 lbs.
0456804	Platform Hoist 200 PRO HG 16 ft. w/ 4 hp Honda gas engine	258 lbs.
0456803	Platform Hoist 200 PRO E 16 ft. w/ 1-1/2 hp electric motor	279 lbs.
0456801	Platform Hoist 200 PRO G 28 ft. w/ 4 hp B & S gas engine	282 lbs.
0456806	Platform Hoist 200 PRO HG 28 ft. w/ 4 hp Honda gas engine	288 lbs.
0456805	Platform Hoist 200 PRO E 28 ft. w/ 1-1/2 hp electric motor	309 lbs.
0456802	Platform Hoist 200 PRO G 44 ft. w/ 4 hp B & S gas engine	370 lbs.
0456808	Platform Hoist 200 PRO HG 44 ft. w/ 4 hp Honda gas engine	376 lbs.
0456807	Platform Hoist 200 PRO E 44 ft. w/ 1-1/2 hp electric motor	397 lbs.

PRO Platform Hoist (400 Lb. Capacity)		
Part #	Description	Weight
0455010	Platform Hoist 400 PRO G 12 ft. w/ 4 hp B & S gas engine	278 lbs.
0455011	Platform Hoist 400 PRO HG 12 ft. w/ 4 hp Honda gas engine	284 lbs.
0455009	Platform Hoist 400 PRO E 12 ft. w/ 1-1/2 hp electric motor	305 lbs.
0455000	Platform Hoist 400 PRO G 16 ft. w/ 4 hp B & S gas engine	284 lbs.
0455004	Platform Hoist 400 PRO HG 16 ft. w/ 4 hp Honda gas engine	290 lbs.
0455003	Platform Hoist 400 PRO E 16 ft. w/ 1-1/2 hp electric motor	311 lbs.
0455001	Platform Hoist 400 PRO G 28 ft. w/ 4 hp B & S gas engine	317 lbs.
0455006	Platform Hoist 400 PRO HG 28 ft. w/ 4 hp Honda gas engine	323 lbs.
0455005	Platform Hoist 400 PRO E 28 ft. w/ 1-1/2 hp electric motor	344 lbs.
0455002	Platform Hoist 400 PRO G 44 ft. w/ 4 hp B & S gas engine	408 lbs.
0455008	Platform Hoist 400 PRO HG 44 ft. w/ 4 hp Honda gas engine	414 lbs.
0455007	Platform Hoist 400 PRO E 44 ft. w/ 1-1/2 hp electric motor	435 lbs.

CLASSIC PLATFORM HOISTS

CLASSIC PLATFORM HOISTS

A customer favorite for decades.

It's the hoist you and your crew know and trust.

RGC's Classic Platform Hoists offer support for loads weighing up to 400 pounds while keeping your crew's safety paramount. Lightweight and more cost-effective than cranes or forklifts, RGC's Classic Platform Hoists assemble easily without the need for special tools.

RGC's Classic Platform Hoists feature:

- Up to 44' of track
- Power drives mount to the third and fifth track cross ties for use on job sites where landscaping is a consideration
- Easy-to-reach long clutch and brake handles for enhanced safety

RGC Classic Platform Hoists come in your choice of gas or electric power for outdoor or indoor operation.



Classic 200 lb. Platform Hoist		
Part #	Description	Weight
0431212	Platform Hoist 200 Classic G 12 ft. w/ 4 hp B & S gas engine	213 lbs.
0450922	Platform Hoist 200 Classic HG 12 ft. w/ 4 hp Honda gas engine	220 lbs.
0431112	Platform Hoist 200 Classic E 12 ft. w/ 1-1/2 hp electric motor	239 lbs.
0431216	Platform Hoist 200 Classic G 16 ft. w/ 4 hp B & S gas engine	221 lbs.
0450923	Platform Hoist 200 Classic HG 16 ft. w/ 4 hp Honda gas engine	228 lbs.
0431116	Platform Hoist 200 Classic E 16 ft. w/ 1-1/2 hp electric motor	247 lbs.
0431228	Platform Hoist 200 Classic G 28 ft. w/ 4 hp B & S gas engine	251 lbs.
0450924	Platform Hoist 200 Classic HG 28 ft. w/ 4 hp Honda gas engine	258 lbs.
0431128	Platform Hoist 200 Classic E 28 ft. w/ 1-1/2 hp electric motor	277 lbs.
0431244	Platform Hoist 200 Classic G 44 ft. w/ 4 hp B & S gas engine	339 lbs.
0450925	Platform Hoist 200 Classic HG 44 ft. w/ 4 hp Honda gas engine	346 lbs.
0431144	Platform Hoist 200 Classic E 44 ft. w/ 1-1/2 hp electric motor	365 lbs.

Classic 400 lb. Platform Hoist		
Part #	Description	Weight
0431412	Platform Hoist 400 Classic G 12 ft. w/ 4 hp B & S gas engine	248 lbs.
0450943	Platform Hoist 400 Classic HG 12 ft. w/ 4 hp Honda gas engine	255 lbs.
0431312	Platform Hoist 400 Classic E 12 ft. w/ 1-1/2 hp electric motor	274 lbs.
0431416	Platform Hoist 400 Classic G 16 ft. w/ 4 hp B & S gas engine	256 lbs.
0450944	Platform Hoist 400 Classic HG 16 ft. w/ 4 hp Honda gas engine	263 lbs.
0431316	Platform Hoist 400 Classic E 16 ft. w/ 1-1/2 hp electric motor	282 lbs.
0431428	Platform Hoist 400 Classic G 28 ft. w/ 4 hp B & S gas engine	289 lbs.
0450945	Platform Hoist 400 Classic HG 28 ft. w/ 4 hp Honda gas engine	296 lbs.
0431328	Platform Hoist 400 Classic E 28 ft. w/ 1-1/2 hp electric motor	315 lbs.
0431444	Platform Hoist 400 Classic G 44 ft. w/ 4 hp B & S gas engine	380 lbs.
0450946	Platform Hoist 400 Classic HG 44 ft. w/ 4 hp Honda gas engine	387 lbs.
0431344	Platform Hoist 400 Classic E 44 ft. w/ 1-1/2 hp electric motor	406 lbs.



PLATFORM HOIST ACCESSORIES

**ALL THE TOOLS AND ACCESSORIES
NEEDED FOR YOUR JOB SITE**

Platform Hoist Solar Panel Carrier		
Part #	Description	Weight
0424022	200 lb. Solar Panel Carrier w/ Frame & Top Sheave w/ Bracket Assembly	60 lbs.
0444044	400 lb. Solar Panel Carrier w/ Frame & Top Sheave w/ Bracket Assembly	70 lbs.
0424030*	Solar Panel Carrier Attachment	25 lbs.

* Fits on 200 lb. & 400 lb. Platforms.
Consult factory for use on the Pivoting Platform Hoist.

200 lb. Hoist Accessories		
Part #	Description	Weight
0400540	Telescope Support. Required for extra support when lifting to heights over 28 ft.	52 lbs.
0400019	Scaffolding Support Arm. Allows track to be mounted sideways with support arms at various points along a scaffold frame for safe,	24 lbs.
0403270	200 lb. Plywood/Truss Carrier - 7 in. Lifts roof trusses, framing materials and solar panels.	13 lbs.
0406042	PL/PRO Cross Tie Repair Kit	5 lbs.
0420404	200 lb. Track Cross Tie Stiffener	1 lbs.
0401498	Pro Swivel Shoe Kit	3 lbs.



Telescope Support will bring your business to new heights, adding reinforced support to track lengths when raising loads more than 28' in height.

200 lb. Platform & Top Sheave/Bracket		
Part #	Description	Weight
0403225	200 lb. Platform & Top Sheave w/ Bracket Assembly	51 lbs.
0403226	200 lb. Platform Assembly Only	40 lbs.
0401100	200 lb. Top Sheave w/ Bracket Assembly Only	12 lbs.

200 lb. Hoist Track Sections		
Part #	Description	Weight
0405570	200 lb. 16 ft. Track w/ Safety Shoes	40 lbs.
0400571	200 lb. 16 ft. Track w/ Splice Plates	36 lbs.
0420088	200 lb. 8 ft. Track w/ Safety Shoes	23 lbs.
0400572	200 lb. 8 ft. Track w/ Splice Plates	19 lbs.
0400573	200 lb. 4 ft. Track w/ Splice Plates	11 lbs.

Platform Hoist Power Drives		
Part #	Description	Weight
0402006	PRO DRIVE w/ 4 hp B & S Gas Engine	158 lbs.
0402007	PRO DRIVE w/ 4 hp Honda Gas Engine	164 lbs.
0402005	PRO DRIVE w/ 1-1/2 hp Electric Motor	185 lbs.
0413041	Classic DRIVE w/ 4 hp B & S Gas Engine	128 lbs.
0413042	Classic DRIVE w/ 4 hp Honda Gas Engine	135 lbs.
0432504	Classic DRIVE w/ 1-1/2 hp Electric Motor	154 lbs.

PLATFORM HOIST OPTIONS

400 lb. Hoist Accessories

Part #	Description	Weight
0400557	400 lb. 6 ft. Roller Angle Guide. Moves material away from roof edge on shallow inclines.	43 lbs.
0400558	400 lb. Gravel Hopper. Lifts granular materials and discharges load into wheel barrows, spreaders and other containers.	52 lbs.
0400562	400 lb. Truss Plywood Carrier - 7 in. Lifts roof trusses, framing materials and solar panels.	11 lbs.
0400540	Telescope Support. Required for extra support when lifting to heights over 28 ft.	52 lbs.
0400019	Scaffolding Support Arm. Allows track to be mounted sideways with support arms at various points along a scaffold frame for safe, sure loading.	24 lbs.
0406042	PL/PRO Cross Tie Repair Kit	5 lbs.
0420403	400 lb. Track Cross Tie Stiffener	1 lb.
0401498	PRO Swivel Shoe Kit	3 lbs.

400 lb. Platform & Top Sheave/Bracket

Part #	Description	Weight
0405667	400 lb. Platform & Top Sheave w/ Bracket Assembly	83 lbs.
0401400	400 lb. Platform Assembly Only	69 lbs.
0400567	400 lb. Top Sheave w/ Bracket Assembly Only	15 lbs.

400 lb. Hoist Track Sections

Part #	Description	Weight
0405552	400 lb. 16 ft. Track w/ Safety Shoes	43 lbs.
0400553	400 lb. 16 ft. Track w/ Splice Plates	39 lbs.
0440088	400 lb. 8 ft. Track w/ Safety Shoes	25 lbs.
0400554	400 lb. 8 ft. Track w/ Splice Plates	21 lbs.
0400555	400 lb. 4 ft. Track w/ Splice Plates	12 lbs.

Lift small stone and granular material without breaking a sweat with RGC's Gravel Hoppers (400 lb only).



Extend your reach, and the life of your equipment, with track section replacements. Choose from 4', 8' and 16' sections to meet your needs. Splice plates come standard on all lengths; base length sections of 8' and 16' are standard and come with safety shoes.



RGC's Roller Angle Guides (400 lb only) are 6' long, attach to the top bracket of the 400 lb lift and safely move material away from roof's edge on shallow inclines, adding to your crew's safety on the job site.



ROOFING OPTIONS

**KEEP YOUR CREW FOCUSED
ON THE WORK AT HAND, NOT
DISTRACTED BY WHERE THEY STAND**

With RGC's roof brackets and shinglers, everything is kept securely where it is needed.


Steel-crafted brackets and shinglers come in a variety of angles and are adjustable to fit most roof pitches.



Roof Brackets & Shinglers		
Part #	Description	Weight
0611007	2 x 6 Standard - 45° Bracket. Holds a 2 in. x 6 in. wide plank snugly with no rocking or tipping. Can be used on all slopes including 12/12 pitch. Can be removed without raising or damaging shingles. 19.5 in. long. Sold by the dozen.	32 lbs. / doz.
0611014	2 x 6 - 60° Bracket. Similar to the Standard Bracket except it holds plank at 60° to the roof pitch. 18.5 in. long. Sold by the dozen.	30 lbs. / doz.
0611008	2 x 6 - 90° Bracket. Similar to the Standard Bracket except it holds plank at 90° to the roof pitch. 17 in. long. Sold by the dozen.	31 lbs. / doz.
0601006	2 x 8 Adjustable Bracket. Holds a 2 in. x 8 in. wide plank snugly with no rocking or tipping. Has a locking device and folds into compact unit for storage. Can be removed without raising or damaging shingles. Sold by the dozen.	38 lbs. / doz.
0611009	2 x 10 - 45° Bracket. Similar to the 2 x 6 Standard Bracket except it holds a 2 in. x 10 in. plank for an extra wide work platform. Sold by the dozen.	39 lbs. / doz.
0601010	2 x 4 Narrow Shingler. Fits a 2 in. x 4 in. plank on edge to make a safe toe hold on shallow pitched roofs. Can be removed without raising or damaging shingles. Sold by the dozen.	20 lbs. / doz.
0601011	2 x 4 Wide Shingler. Similar to the Narrow Shingler except that the plank is held on the 4 in. side. Sold by the dozen.	24 lbs. / doz.

*Long Brackets available on special order. 25 dozen minimum order.

Ladder Hooks and Arms		
Part #	Description	Weight
0601013	Ladder Arms (pair).	6 lbs. / pr.
0601018	Ladder Hook w/ Latch and Wheel. Swivel plate allows ladder to be placed in valley between gables. Plate prevents hook from damaging asphalt shingles.	6 lbs. ea.
0601017	Latch w/ Wheel (for Ladder Hook).	2 lbs. ea.

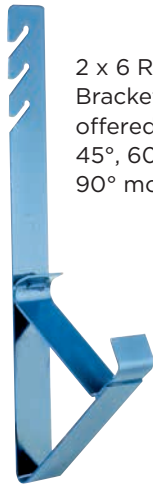

2 x 6 Roof Brackets are offered as 45°, 60° and 90° models



2 x 8 Adjustable Roof Brackets



2 x 4 Narrow and 2 x 4 Wide Shinglers



Ladder Hook with Latch and Wheel

PIVOTING PLATFORM AND HANDIHOISTS

NO BLIND CURVES ON THESE JOB SITES

No two worksites are exactly alike. RGC Hoisting is prepared to help you take on any curves in the road with our Pivoting Platform Hoists and HandiHoists.

Pivoting Platform Hoists can support loads weighing up to 400 lbs that need to be lifted up to 44' in the air, all with a pivoting track section adjustable from 35° to 70°, adapting to nearly any sloped roof.

RGC's Pivoting Platform Hoists offer:

- The functionality of a conveyor belt without the hefty price
- Improved safety by allowing loads to be deposited further from a roof's edge
- An adaptable track configuration that can be assembled easily to meet your project's demands

Pivoting Platform Hoists come with your choice of Honda or Briggs & Stratton 4 horsepower engines or a 1 ½ hp electric motor.



Secure your workload while protecting your crew by using our Pivoting Platform Hoist, allowing product to be delivered away from the roof's edge.

Powered by either a gas engine or an electric motor, the Pivoting Platform Hoist has a 400 lb capacity with 44' of track.

PPH 400 lb. Capacity		
Part #	Description	Weight
0410148	Pivoting Platform Hoist 400 lb. PRO G 44 ft. w/ 4 hp B & S gas engine.	430 lbs.
0410156	Pivoting Platform Hoist 400 lb. PRO HG 44 ft. w/ 4 hp Honda gas engine.	436 lbs.
0410140	Pivoting Platform Hoist 400 lb. PRO E 44 ft. w/ 1-1/2 hp motor.	457 lbs.
0410164	Pivoting Track & Platform.	81 lbs.
0410224	Pivoting Platform Hoist Track Roof Support.	15 lbs.
0410236	Pivoting Platform Hoist Truss Carrier	9 lbs.

PHH Hoist Solar Panel Carrier		
Part #	Description	Weight
0446160	PPH Solar Panel Carrier Attachment.*	31 lbs.

* Fits Pivoting Platform Hoist only.

ALL THE STRENGTH WITHOUT THE MOTOR

For job sites without reliable power, or in work zones with restrictive noise or emissions regulations, consider the HandiHoist.

Operated manually by turning a 24" hand wheel, the HandiHoist is an economical, environmentally friendly option that has all the strength of our other hoists but without a motor, making it ideal for indoor jobs.

RGC's HandiHoists feature:

- Flexibility to be mounted on track lengths of 12' to 44' while still capable of lifting loads up to 400 lbs
- A large cable drum and 3.5:1 gear ratio winch for easy lifting
- Friction disc brakes for smooth speed control when raising and lowering heavy loads

HandiHoists are ideal for environmentally sensitive work sites or those in which electrical power is at a premium



Rugged HandiHoists are the dependable, economical and environmentally friendly choice for all your heavy duty lifting requirements. A dependable steel frame provides exceptional durability and requires only two lock pins for easy mounting onto an RGC base track section - no special tools needed.

HandiHoist 200 lb. Capacity

Part #	Description	Weight
0409212	Handi Hoist w/ 12 ft. track	104 lbs.
0409216	Handi Hoist w/ 16 ft. track	110 lbs.
0409228	Handi Hoist w/ 28 ft. track	140 lbs.
0409244	Handi Hoist w/ 44 ft. track	176 lbs.

HandiHoist 400 lb. Capacity

Part #	Description	Weight
0409412	Handi Hoist w/ 12 ft. track	110 lbs.
0409416	Handi Hoist w/ 16 ft. track	113 lbs.
0409428	Handi Hoist w/ 28 ft. track	146 lbs.
0409444	Handi Hoist w/ 44 ft. track	185 lbs.

HandiHoist Accesories

Part #	Description	Weight
0409510	HandiHoist Winch Assembly w/ Handwheel	70 lbs.
0400540	Telescope Support. Required when lifting to heights over 28 ft.	52 lbs.
0400557	400 lb. 6 ft. Roller Angle Guide.	43 lbs.
0400562	400 lb. Plywood/Truss Carrier - 7 in. Lifts roof trusses, framing materials and solar panels.	11 lbs.
0420403	400 lb. Track Cross Tie Stiffener	1 lb.
0406042	PL/PRO Cross Tie Repair Kit	5 lbs.
0403270	200 lb. Plywood/Truss Carrier - 7 in. Lifts roof trusses, framing materials and solar panels.	13 lbs.
0420404	200 lb. Track Cross Tie Stiffener	1 lb.

SWING HOISTS

WHEN YOU REALLY DO HAVE A TON OF MATERIAL TO LIFT, RGC'S SWING HOISTS ARE JUST THE TICKET.



Get more coverage with the HS2000 Bi-Directional Swing Hoist. It can be set up at the edge of a roof and assembled to swing to the left or right to provide greater versatility, easing the strain on your crew.

Every job is a big undertaking. When the project calls for moving up to 2,000 pounds of stone, asphalt or equipment, you need a swing hoist that's up to the challenge.

RGC's HS2000 Swing Hoists can be set up to swing to the right or left, depending on need, and are constructed with high-strength steel tubing for reliable, sturdy hoisting. Hydraulic power gives the operator complete control of lifting and lowering speed, providing extra safety protection for the crew.

RGC's Swing Hoists feature:

- A separate winch and power unit for easy handling
- Self-locking pins for quick and easy assembly
- Self-locking hydraulic boom for safer loading and unloading of materials
- Split-leg frame design for easy transporting
- Improved operator safety thanks to a protective fence and the ability to unload materials away from the roof edge
- Nesting ballast weight shells are included for enhanced safety
- A cable keeper for added lifting safety
- An optional handwinch quickly mounts to hoist frame to lift the HydraPack up 10+ stories

RGC's HS2000 Bi-Directional Swing Hoist allows your crew to easily maneuver a heavy load up the right or left side of the hoist.

Bi-Directional HS2000 Swing Hoist - 1 Ton Capacity			
Part #	Model	Description	Weight
0713140	HS2000	10 hp B & S Intek I/C engine, electric & pull start, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel.	1015 lbs.
0713145	HS2000	11 hp Honda engine, electric & pull start, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel.	1025 lbs.
0713150	HS2000	0713145 w/ Limit Switch.	1030 lbs.
0713155	HS2000	13 hp Honda engine, electric & pull start, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel.	1055 lbs.
0713160	HS2000	0713155 w/ Limit Switch.	1060 lbs.
0713165	HS2000	0713155 w/ HydraWinch HD.	1165 lbs.
0713170	HS2000	0713155 w/ Limit Switch & HydraWinch HD.	1170 lbs.
0713185	HS2000	16 hp B&S engine, electric & pull start, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel.	1080 lbs.
0713190	HS2000	0713185 w/ Limit Switch.	1085 lbs.
0713195	HS2000	0713185 w/ HydraWinch HD.	1190 lbs.
0713200	HS2000	0713185 w/ Limit Switch & HydraWinch HD.	1195 lbs.
0713205	HS2000	18 hp B&S engine, electric & pull start, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel.	1085 lbs.
0713210	HS2000	0713205 w/ Limit Switch.	1090 lbs.
0713215	HS2000	0713205 w/ HydraWinch HD.	1185 lbs.
0713220	HS2000	0713205 w/ Limit Switch & HydraWinch HD.	1190 lbs.
0713225	HS2000	7-1/2 hp electric motor, 3 ph, HW2000S winch w/ 200 ft. of 1/4 in. wire rope, 40 ballast weights & funnel. (Motor starter not included.)	1014 lbs.
0713230	HS2000	0713225 w/ Limit Switch.	1050 lbs.
0713235	HS2000	0713225 w/ HydraWinch HD.	1114 lbs.
0713240	HS2000	0713225 w/ Limit Switch, Motor Starter & HydraWinch HD.	1160 lbs.

Designed with your crew's safety in mind, RGC's Swing Hoist helps move the heaviest of loads without breaking a sweat.

*Optional HydraWinch HD with 700' of wire rope for HS2000 raises 1,000 lbs.

*Optional HydraWinch HD with 700' of wire rope for HS2000 raises 2,000 lbs. when double reeved for 350 ft. of lifting height.

*Optional Upper Limit Switch for anti-two blocking on HS2000.



HS1000 with 400lb trash tray


Swing Hoist Frame Assemblies			
Part #	Model	Description	Weight
0713100	Bi-Directional HS2000	Block carton, counterweight leg, front leg assembly, brace, cylinder mount, boom & 40 ballast weight shells.	691 lbs.
0700270	HS1000	Block carton, counterweight leg, front leg assembly, brace, cylinder mount, boom & 20 ballast weight shells.	587 lbs.

Swing Hoist Specifications			
Hoist Model	HS1000	HS2000	SH300*
Capacity	1000 lbs.	2000 lbs.	300 lbs.
Standard Winch Model	HW1000S	HW2000S	----
Cable: Supplied / Maximum	150 / 300 ft.	200 / 300 ft.	----
Optional Winch Model	Consult Factory	HydraWinch HD	----
Counterweight Required	1000 lbs.	2000 lbs.	600 lbs.
Ballast Weight Shells Included	20 pcs.	40 pcs.	12 pcs.
Frame Weight	587 lbs.	691 lbs.	158 lbs.
Overall Height (to top of boom)	122 in.	153 in.	92 in.
Boom Overhang	55 in.	60 in.	48 in.

* SH300 now available with built-in handwinch and 60 ft. of wire rope.

HS1000 Swing Hoist - 1/2 Ton Capacity			
Part #	Model	Description	Weight
0743044	HS1000	11 hp Honda engine, electric and pull start, HW1000S winch with 150 ft. of 1/4 in. wire rope, with 20 ballast weight shells and funnel.	906 lbs.
0700415	HS1000	7-1/2 hp electric motor, 3 phase, HW1000S winch with 150 ft. of 1/4 in. wire rope, with 20 ballast weight shells and funnel.(Motor Starter not included.)	903 lbs.

Anti-Rotate Wire Rope	
Part #	Description
7310270	Wire rope 1/4 x 730' Anti-Rotate



Rotation-resistant wire rope provides reinforced strength that won't break when you need it most. The rope is specially designed not to wrap around itself for improved safety. Raise and lower with confidence in the security of any load.

SWING HOIST ACCESSORIES

THE EQUIPMENT YOU NEED FOR THE JOBS YOU'VE SECURED.

When there's a ton of material overhead, there's no compromising your crew's safety. RGC's Swing Hoists have a full menu of options to guarantee you've got the winches and accessories needed to get the job done while keeping materials squarely in place.

RGC also offers a Hand Swing Hoist featuring a tripod design for rooftop stability and lightweight components for easy transport and assembly.

RGC Hand Swing Hoists offer:

- Boom locks for added hoisting and unloading safety
- An optional fence for operator protection on the SH300 model
- Nesting ballast weight shells for additional safety
- Ideal for raising Swing/Trolley Hoist frames into location

The SH300 is a 300 lb capacity, manually operated swing boom hoist and is available with a handwinch for added convenience.



Protect your workers and your equipment with a HS2000 Bi-Directional Swing Hoist and optional upper limit switch. Control the movement of the hoist, the stability of the supplies and the safety of your team, all at once.



The SH300 Hand Swing Hoist, with optional handwinch, makes quick work of your light loads and can be used to lift larger swing hoist components.

HydraWinch Specifications

Winch Model	HW1000S	HW2000S	HydraWinch HD
Capacity	1000 lbs.	1000/2000 lbs.	1000/2000 lbs.
Max. Lifting Speed	up to 165 fpm	up to 165 fpm (1 part of line) up to 82 fpm (2 parts of line)	up to 200 fpm (1 part of line) up to 100 fpm (2 parts of line)
Wire Rope Supplied (1/4 in. diameter)	150 ft.	200 ft.	730 ft.
Max. Wire Rope Length (1/4 in. diameter)	300 ft.	300 ft.	730 ft.
Max. Lifting Height	285' @ 500 lbs.	285' @ 660lb	@ 1000lbs.
Weight (approx.)	118 lbs.	124 lbs.	216 lbs.

HydraWinches

Part #	Model	Description	Weight
1020004	HydraWinch HD	Heavy-duty HydraWinch.	216 lbs
1000413	HW2000S	HydraWinch for HS2000 Swing Hoist.	124 lbs.
1000412	HW1000S	HydraWinch for HS1000 Swing Hoist.	118 lbs.

Accessory Hand Winch

Part #	Description	Weight
0102000	Hand Winch for HS2000 with 150 ft. wire rope.	35 lbs.
0101000	Hand Winch for HS1000 with 150 ft. wire rope.	34 lbs.

SH300 Hand Swing Hoist & Accessories

Part #	Model	Description	Weight
0200085	SH300	Hand Swing Hoist with 12 ballast weight shells and funnel.	222 lbs.
0285000	SH300	Hand Swing Hoist with handwinch, 60 ft. of wire rope, 12 ballast weight shells and funnel.	269 lbs.
0200086		Operator fence for SH300.	15 lbs.
0200563		12 in. Gin Pulley for SH300.	20 lbs.



HOISTING HYDRAPAKS

LIGHTWEIGHT POWER DRIVES FOR HEAVY LIFTING DEMANDS

Portable power doesn't have to be lacking in oomph.

RGC's HydraPaks are versatile single-power sources that put reliable, efficient hydraulic power at the job site. These lightweight, portable power drives can operate a Swing Hoist or a HydraSaw. All gasoline-powered RGC HydraPaks are equipped with a six-gallon hydraulic reservoir, lifting eye, low-oil shutdown, a heavy-duty heat exchanger and are cart-mounted with 16" pneumatic tires.

HOISTING HYDRAPAK WITH ELECTRIC MOTOR

RGC electric-powered HydraPaks are equipped with a six-gallon reservoir, heavy-duty heat exchanger and lifting eye. Each unit is mounted on a portable cart with 16" pneumatic tires.

Hoisting HydraPaks with Gasoline Engines			
Other engines are available on special order. Consult factory for price and availability.			
Part #	Model	Description	Weight
0501058	HI058S	10 hp B & S Intek I/C engine with electric and pull start, 5 or 8 gpm output, and winch and boom valves.	235 lbs.
0545308	HH1158S	11 hp Honda engine with electric and pull start, 5 or 8 gpm output, and winch and boom valves.	245 lbs.
0545328	HH1158S	0545308 w/ safety valve for limit switch.	260 lbs.
0544501	HH1358S	13 hp Honda engine with electric and pull start, 5 or 8 gpm output, and winch and boom valves.	275 lbs.
0544521	HH1358S	0544501 w/ safety valve for limit switch.	290 lbs.
0543002	HV1658S	16 hp B & S Vanguard engine with electric and pull start, 5 or 8 gpm output, and winch and boom valves.	300 lbs.
0543012	HV1658S	0543002 w/ safety valve for limit switch.	315 lbs.
0514858	HV1858S	18 hp B & S Vanguard engine with pull and electric start, 5 or 8 gpm output, electronic governor, and winch and boom valves.	300 lbs.
0514859	HV1858S	0514858 w/ safety valve for limit switch.	315 lbs.

Hoisting HydraPak with Electric Motor			
Part #	Model	Description	Weight
0578203	HE7558S	7-1/2 hp, 230V, 3 ph, 60 hz electric motor with 5 or 8 gpm output, and winch & boom valves. Does not include motor starting or switching equipment.	234 lbs.
0578213	HE7558S	0578203 w/ safety valve for limit switch.	250 lbs.
0530601		Motor Starter for HE7558S with NEMA 4X enclosure. 230V, 3 ph, 60 hz. (less power cord)	20 lbs.
5400184		Power Cord for Motor Starter less plug (priced per foot)	



HV1658S HydraPak Shown without limit switch valve.



The easy to maneuver HH1358S HydraPak features an optional safety valve for limit switch to prevent over-raising materials.

TROLLEY AND GROUND-MOUNTED HOISTS

LIFT HEAVY LOADS WITH AN UNOBSTRUCTED VIEW OF THE WORKSITE

Every contractor needs a prized, trustworthy assistant. Meet RGC's Trolley and Ground-Mounted Hoists, ready to become your crew's MVP.

The TT1000 Trolley Hoist boasts a 1/2 ton load capacity, standard operator fence and the ability to hang over the roof by up to 5', all of which keeps your crew's safety at the forefront without compromising speed.

Capable of lifting up to 1,000 lbs and 500 lbs of material respectively, RGC's Trolley and Ground-Mounted Hoists are constructed from high-strength steel tubing for reliability. Hydraulic power makes easy work of lifting and lowering while optional handwinches quickly mount to the hoist frame for lifting power drives up to four stories.

RGC's Trolley and Ground-Mounted Hoists feature:

- High-strength steel tubing for strong, reliable construction
- Hydraulic power-up and power-down feature puts the operator in complete control
- Easy frame dismantling into three sections for quick transport (Trolley Hoist TT1000 model only)
- Self-locking pins for fast assembly (Trolley Hoist TT1000 model only)
- Adjustable legs for secure use on sloped roofs and parapets (Trolley Hoist TT1000 model only)
- The track allows loads to be pulled in from the roof edge for fast, safe and easy unloading (Trolley Hoist TT1000 model only)
- Trolley wheels are protected from dirt and corrosion by the heavy-duty steel track (Trolley Hoist TT1000 model only)
- A protective operator fence provides additional safety (Trolley Hoist TT1000 model only)
- Nesting ballast weight shells are included for enhanced safety in a convenient form (Trolley Hoist TT1000 model only)

RGC's Trolley and Ground-Mounted Hoists are the extra crew member you'll be counting on for years to come.



TROLLEY AND GROUND-MOUNTED HOISTS



Trolley Hoist Specifications	
Model	TT1000 W/ HH500
Hoisting Speed	70/140 fpm*
Cable Supplied	200 ft.
Cable Diameter	3/16 in.
Trolley Track Length	15 ft.
Overhangs Roof By	5 ft.
Front Opening (width)	4-1/2 ft.
Max. Height Under Track	8 ft.
Counterweight Required	1500 lbs.
Ballast Weight Shells Included	30 pcs.
Shipping Weight (w/ Frame)	814 lbs.

* 70 fpm speed is with 2 parts of line at 1000 lbs. capacity.

* 140 fpm speed is with 1 part of line at 500 lbs. capacity.

TT1000 Trolley Track Hoist			
Part #	Model	Description	Weight
0800421	TT1000	8 hp Honda engine (HH500), frame assembly, with 200 ft. of 3/16 in. wire rope and 30 ballast weight shells with funnel.	814 lbs.

Trolley Track Power Drive			
Part #	Model	Description	Weight
0800783	HH500	8 hp Honda engine, hydraulic controls and 200 ft. of 3/16 in. wire rope.	319 lbs.

Trolley Track Frame Assembly & Accessory			
Part #	Model	Description	Weight
0900003	TT1000	Trolley rail, front leg, rear leg, operator fence and 30 ballast weight shells.	495 lbs.
0103000		Hand Winch for TT1000 with 50 ft. wire rope.	32 lbs.

Ground Mounted Power Drive			
Part #	Model	Description	Weight
0878403	HH500	8 hp Honda engine w/ hydraulic controls. Order wire rope separately.	305 lbs.
7300009		3/16 in. wire rope - priced per foot.	

SWING AND TROLLEY HOIST ACCESSORIES

THE GEAR YOU NEED FOR EVERY HEAVY-LIFTING JOB

RGC Hoisting has the tools and accessories you need to transport gravel, HVAC units and tear off asphalt safely and securely, no matter the job site.



Gravel Bucket — your choice of 400 lb, 800 lb and 1600 lb capacities to accommodate any size project with bottom discharge on all models for safer dispersal of materials



Hoist Forks — the ideal choice for efficient movement of large quantities of rolled material; available in 1000 lb and 2000 lb capacities

Gravel Buckets			
Part #	Model	Description	Weight
0100030	GB400	400 lb. and 3-1/2 cu. ft. capacity. Bottom discharge operated by handles on each side of frame. Measures 18 in. W x 18 in. D x 24 in. H	51 lbs.
0100059	GB800	800 lb. and 7 cu. ft. capacity. Bottom discharge has positive shutoff to stop flow between loads. Measures 30 in. W x 30 in. D x 29 in. H. Bottom opening is 10 in. x 10 in.	80 lbs.
0100058	GB1600	1600 lb. and 14 cu. ft. capacity. Bottom discharge has positive shutoff to stop flow between loads. Measures 30 in. W x 30 in. D x 41 in. H. Bottom opening is 10 in. x 10 in.	150 lbs.

Hoisting Forks			
Part #	Model	Description	Weight
0100154	HF1000	1000 lb. capacity. Wheels at rear of fork and pivoting material stops are standard. Measures 38 in. W x 60 in. H x 35 in. D	163 lbs.
0100153	HF2000	2000 lb. capacity. Wheels at rear of fork and pivoting material stops are standard. Measures 38 in. W x 63 in. H x 46 in. D	225 lbs.
0100017	Masonry Fork	800 lb. capacity. Measures 24 in. W x 25 in. H x 28 in. D	41 lbs.



SWING AND TROLLEY HOIST OPTIONS



Ballast Weight Shells — an easy-to-assemble steel shell that can be filled with concrete for improved stability and counterbalance for swing and trolley hoists



Trash Trays — available in 400 lb and 1200 lb capacities to make quick, efficient work of transporting scrap material and old shingles or tiles

Ballast Weight Shells

Ballast Weights are steel cases you fill with concrete, have an easy to assemble three-piece snap-lock design, are sturdy and easy to carry. Shipped in knock-down form, they weigh 50 lbs. when assembled and filled with concrete.

Part #	Description	Weight
0132000	Ballast Weight Shells (each)	5 lbs.
0132006	Ballast Weight Shells (6 pack)	31 lbs.
0132010	Ballast Weight Shells (10 pack)	50 lbs.
6432005	Funnel - large for filling ballast weight shells	1 lb.

Trash Trays

Part #	Description	Weight
0100056	Large Trash Tray. 1200 lb. capacity, with cable assembly. Measures 90 in. W x 40 in. D x 12 in. H	165 lbs.
0100052	Small Trash Tray. 400 lb. capacity, with cable assembly. Measures 61 in. W x 33 in. D x 12 in. H	63 lbs.
0104290	Cable Assembly for Large Trash Tray	8 lbs.
0104291	Cable Assembly for Small Trash Tray	4 lbs.

**SEE OUR FULL LINE OF CONSTRUCTION TOOLS
AT WWW.RGCTOOLS.COM
OR REQUEST A FULL LINE CATALOG
TODAY AT 1-800-RGC-TOOL (742-8665)**



RGC HOISTING

1849 Harlem Road | Buffalo, NY 14212

1-800-831-LIFT (5438) | 716-895-1547 (fax)

WWW.RGCHOISTING.COM | SALES@RGCHOISTING.COM