

CLIMBING EQUIPMENT



#1 IN LADDERS™



LEADING THE WAY IN CLIMBING SOLUTIONS

Once your feet leave the ground, you're in our world. From ladders to fall protection, Werner offers you a full line of climbing equipment that's engineered to provide maximum stability, safety and comfort at every height. Our products are designed to be used anywhere from the home to the most demanding job sites.

We continually strive to improve manufacturing techniques through ongoing testing and facility investment. Recognized for their durability, quality and safety, Werner products are developed based on application, industry research, product testing and customer insight to ensure the highest quality standards that meet the needs of our end users.

Werner remains the market leader today by continually enhancing and improving its product offering. Recently, the Werner 6200 Series Stepladders were redesigned for better performance and productivity, which included an upgraded ladder top and enhanced bracing for overall durability. Our number one professional grade ladder series was upgraded specifically for professional contractors and continues to be a dependable tool on jobsites everywhere.



LOCKTOP



EDGE 360

As part of our commitment to our customers, Werner is also focused on introducing new products and accessories to help users work more safely and efficiently. This commitment can be seen in cutting-edge product innovations that are unique and first to the industry, including the recent launch of the Podium, a new category of ladders. Podiums offer extra-large standing platforms allowing users to face any direction while working. The extended guardrail wraps around the user providing a feeling of safety while working and also secures tools and accessories at the top of the ladder, where they are needed. Based on the success of this new family of Podiums, the category will continue to expand with additional sizes, materials and casters for easy mobility.



Work Facing Any Direction



PRODUCT CERTIFICATIONS

Werner ladders are manufactured and tested to the strictest quality standards. All Werner ladders meet or exceed American National Standards Institute (ANSI) and Occupational Safety and Health Administration (OSHA) requirements, where applicable.



OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION CODE

All Type II, I, IA and IAA fiberglass, aluminum and wood ladders, ladder jacks and extension planks meet or exceed code. OSHA CODE applies to ladders used in the workplace. Werner Co. recommends Type II or heavier duty rated ladders for these applications.



AMERICAN NATIONAL STANDARDS INSTITUTE

PRODUCT LINES MEET OR EXCEED ANSI CODE

Fiberglass Ladders A14.5 (2007)
Aluminum Ladders A14.2 (2007)
Ladder Jacks A10.8 (2001)
Extension Planks A10.8 (2001)
Scaffolding A10.8 (2001)
Stages A10.8 (2001)
Work Platforms A10.8 (2001)
Attic Ladders..... A14.9 (2010)



CLIMBING PROSM

SAFETY TRAINING

This online training program is designed to help you provide state-of-the-art training. Climbing Pro offers an interactive way to educate users how to safely climb.

- New and improved courses
- Monitoring and measurement tools for reporting to key customers


www.wernerclimbingpro.com

Online Courses

- Knowledge check points throughout courses
- Stop and restart as you need, keeps track of where you left off
- Multimedia and interactive simulations
- Ongoing updates for additional courses



THE #1 BRAND IN PROFESSIONAL CLIMBING EQUIPMENT

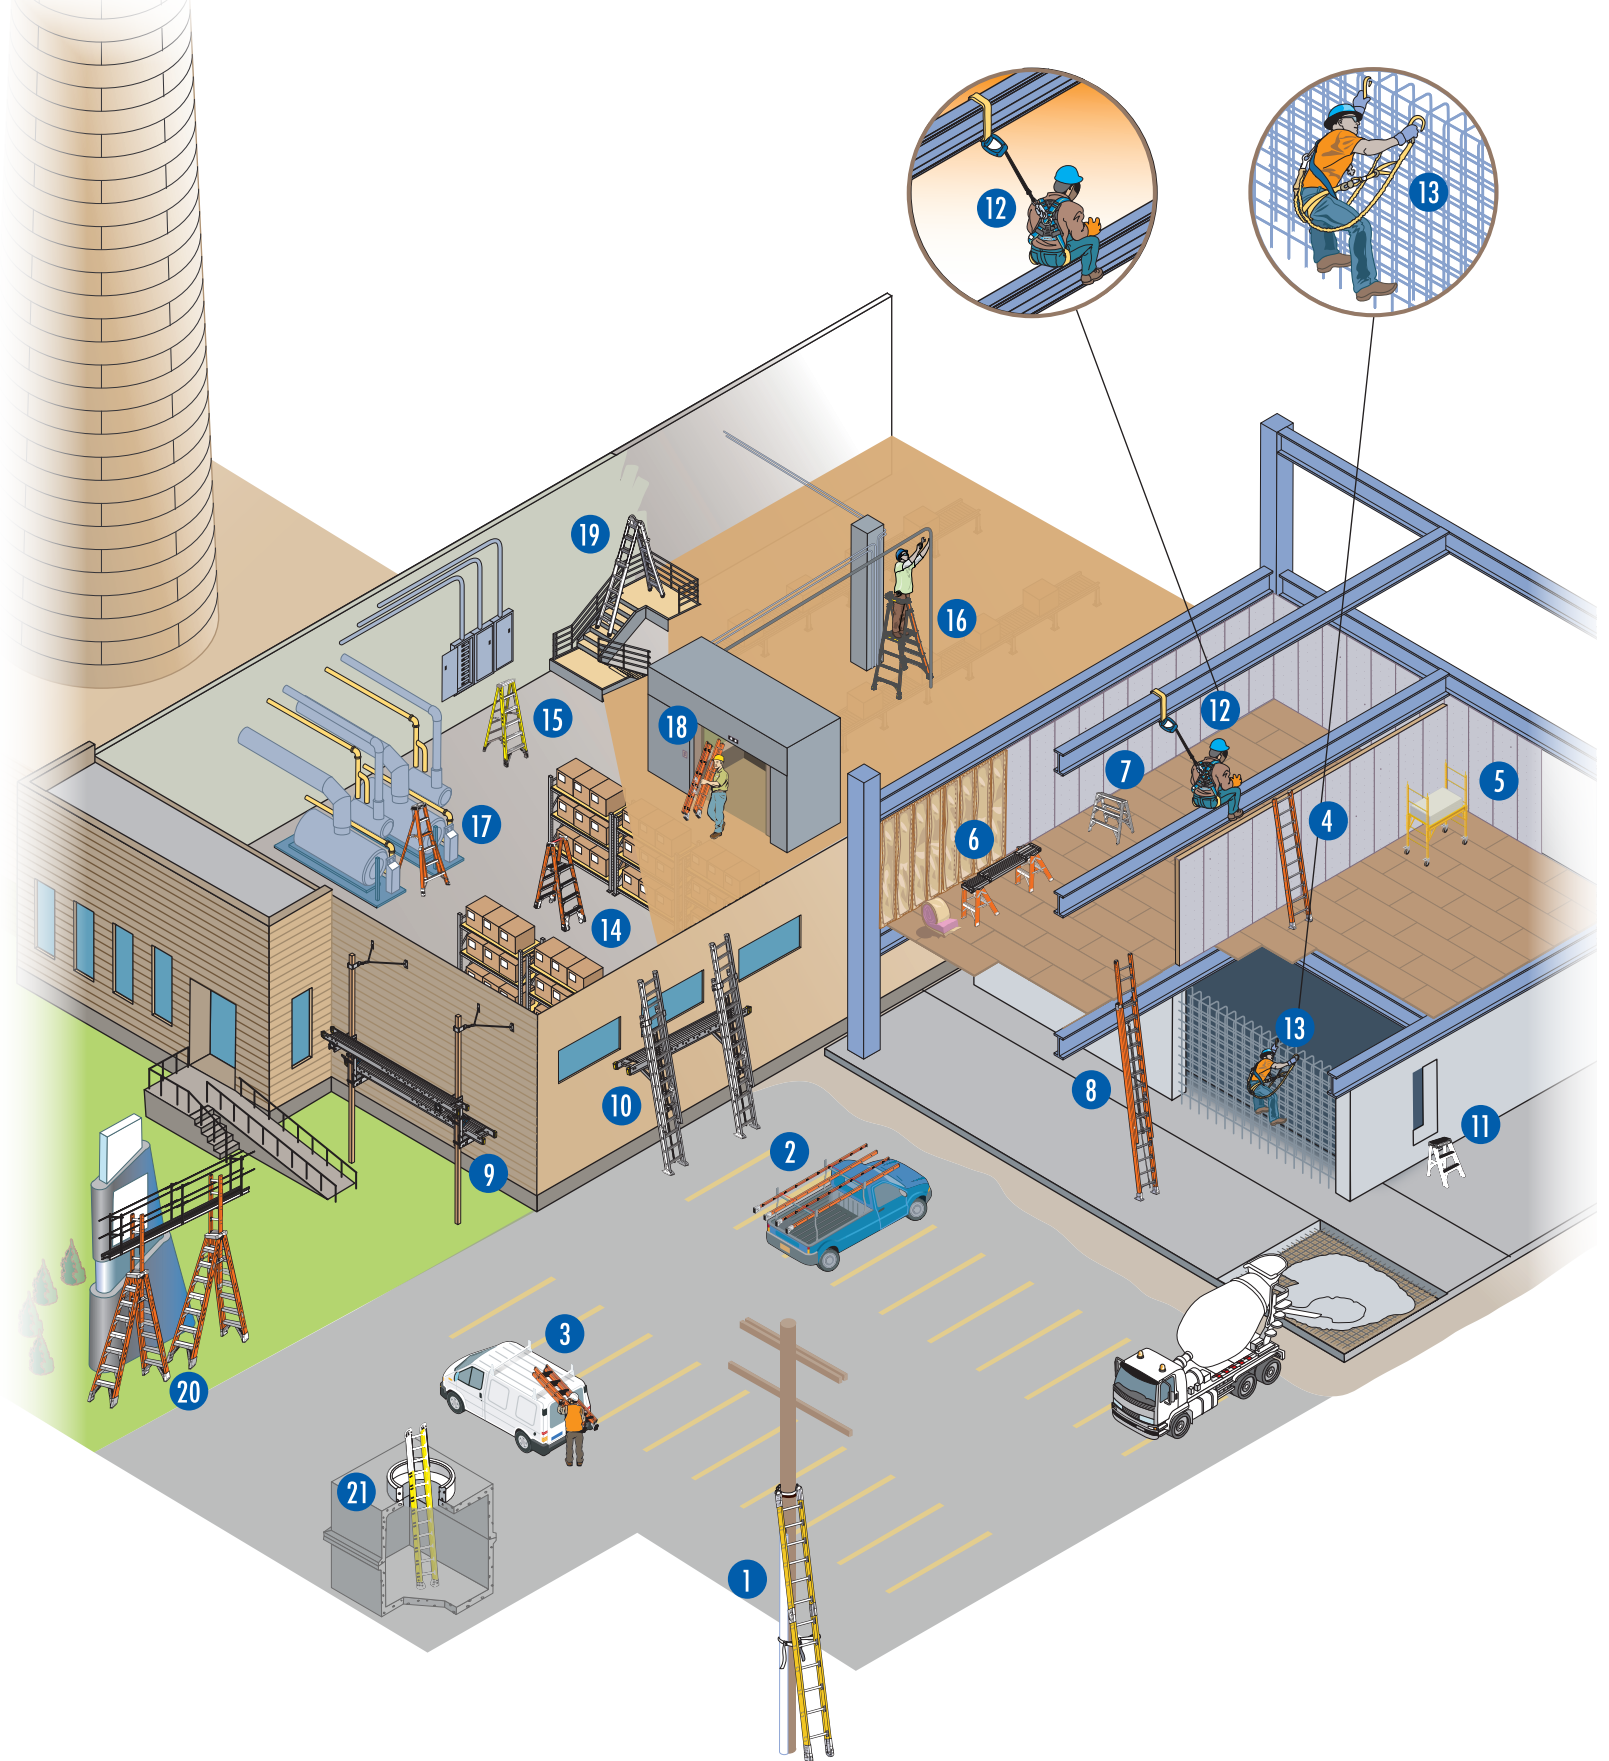

CHOOSING THE RIGHT PRODUCT FOR THE JOB

1 Sectional ladders are designed for use by electrical, telephone and cable utilities. They provide versatility in applications where transit, storage or access requires short sections to be coupled together.



2 Truck rack to transport ladders, lumber on top of vehicle to jobsite.

3 Van racks used primarily in the paint industry to transport ladders safely to jobsite.

4 Single one-section non-extendable ladders provide easy access to mid-range heights.



5 Steel rolling scaffold has 1000 lbs. load capacity. Sets up with 1 person. Add additional sections for more height. No tools required. Easily moves from one room to another for maximum productivity.



6 Twin step stools are ideal for using with planks.



7 Special purpose work stands are great for wallboard installers and general contractors.



8 Extension ladders are available in a wide assortment of types and sizes. They can handle an extremely wide range of tasks at varying elevations and are the most popular on construction and job sites.



9 Complete pump jack system designed for siding applications. Adjusts to easily work at the height specific to the job. Allows workers to work from side to side safely at various heights.



10 Create productive climbing equipment systems with extension ladders, ladder jacks and aluminum stages.



11 Lightweight, sturdy and compact step stools are handy for many applications. Unlike regular stepladders, you can stand on the top platform.



12 Fall protection self retracting lifeline(SRL), harness and anchor used on i-beam application.



13 Fall protection harness and positioning lanyard used at elevated heights for protection against falls. Ideal application on rebar.



14 Stocker's Ladder®s combine a twin stepladder with a revolutionary warehouse type ladder with a large platform.



15 Stepladders are the most popular of all ladder styles. These ladders are often used for applications at low or medium heights. Ladder tops and pail shelves can hold tools, small parts and paint buckets.



16 Podium ladders are ideal for working at fixed heights. The extra large platform allows you to work facing any direction. The extended guard rail wraps around the user and holds tools and equipment.



17 Tripod ladders with 3 legs go where traditional ladders cannot. The back rail fits easily into tight corners and other confined spaces. Often used by electricians for installing wire between framing studs.



18 Compact fiberglass extension ladder has a 3-piece design with all the same features as a traditional extension ladder. The smaller, compact design allows it to fit through tight spaces and maneuver more easily on jobsites. Easily fits on top of or in work vehicles.



19 The telescoping multi-ladder can be used as a stepladder, extension ladder, stairway ladder or two scaffold bases. 4 ladders in 1 with multiple heights.



20 The extension trestle ladder has an adjustable center trestle system. Often used in pairs with either a 12" or 14" wide stage or plank to work inside industrial buildings and by sign hangers to work for long periods of time at fixed heights.



21 Manhole ladder used to access manholes in roadways. Hoop style end caps for removing ladder from manhole easily.





THE #1 BRAND IN PROFESSIONAL CLIMBING EQUIPMENT

CHOOSING THE RIGHT LADDER FOR THE JOB

STEP 1 SELECT HEIGHT (SIZE)

Ladder Height

Maximum Reach*

STEPLADDERS	
Ladder Height	Maximum Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'

Average Heights

One Story Home: 17'

Two Story Home: 25'

Ladder Height

Maximum Reach*

EXTENSION LADDERS		
Ladder Height	Maximum Reach*	Height To Gutter or Top Support Point††
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

Support Points

*Assumes a 5'6" person with a vertical 12" reach.

†† Support points for extension ladders reflect section overlap, ladder angle, or 3' extension above roof line.

STEP 2 SELECT PERFORMANCE (DUTY RATING)

WERNER PERFORMANCE SYSTEM [®]

Color Match for Ladder Performance.

★ 200 lbs.	★★ 225 lbs.	★★★ 250 lbs.	★★★★ 300 lbs.	★★★★★ 375 lbs.
----------------------	-----------------------	------------------------	-------------------------	--------------------------

200 lbs.*	Economical design for lightweight use	Type III
225 lbs.*	Basic design for simple projects	Type II
250 lbs.*	Designed to handle most projects and jobs	Type I
300 lbs.*	Rugged performance designed with the pro in mind	Type IA
375 lbs.*	Maximum performance and durability for the toughest jobs	Type IAA

Includes User and Materials

STEP 3 SELECT MATERIAL



NON-CONDUCTIVE FOR WORKING NEAR ELECTRICITY



NOT FOR USE NEAR ELECTRICITY



THE #1 BRAND IN PROFESSIONAL CLIMBING EQUIPMENT

TABLE OF CONTENTS

<i>SERIES/MODEL</i>	<i>PAGE</i>
FIBERGLASS STEPLADDERS	1
7400 SERIES	1
T7400 SERIES	2
P7400 SERIES	2
PT7400/PT7400-4C SERIES	3
E7400 SERIES	3
OBEL00 SERIES	4
OBCN00 SERIES	4
7300 SERIES	5
6200 SERIES	5
T6200 SERIES	6
C6200 SERIES	6
P6200 SERIES	7
FTP6200 SERIES	7
SSF00 SERIES	8
TW6200 SERIES	8
6202 MODEL	8
T6202 MODEL	8
6100 SERIES	9
6002 MODEL	9
6000 & 6000S SERIES	10
T6000 SERIES	10
PT6000/PT6000-4C SERIES	11
5900 & 5900S SERIES	11
FIBERGLASS STEPLADDER COMPARISON CHART	12
L6200 SERIES	13
L7300 SERIES	13
FIBERGLASS PODIUMS	14
PD7300/PD7300-4C SERIES	15
PD6200/PD6200-4C SERIES	15
FIBERGLASS MULTI-POSITION LADDER	16
FMT SERIES	16
FIBERGLASS DUAL PURPOSE 2-IN-1 LADDER	17
DP6200 SERIES	17
FIBERGLASS EXTENSION LADDERS	18
D7100-2LV SERIES	18
D7100-2 SERIES	18
D7100-2GHV SERIES	18
7100-2/7100-1 SERIES	19
D8200-2EQ SERIES	19
D7200-2/7200-2 SERIES	20
D6400-2 SERIES	20
D6200-2/D6200-1 SERIES	21
D6200-3 SERIES	21

FIBERGLASS EXTENSION LADDERS (cont.)	
D6200-GHV SERIES	21
D6000-2 SERIES	22
D5900-2 SERIES	22
FIBERGLASS EXT. LADDER COMPARISON CHART	23

<i>SERIES/MODEL</i>	<i>PAGE</i>
FIBERGLASS SPECIALTY LADDERS	24
7800 SERIES	24
M7100-1 SERIES	24
S7900 SERIES	25
9500-2/9500-1 SERIES	25
SPF00-1/TPF00-1 SERIES	26
S7700 SERIES	26
ALUMINUM STEPLADDERS	27
400 SERIES	27
T400 SERIES	27
P400 SERIES	28
370 SERIES	28
T370 SERIES	29
P370 SERIES	29
PT370 SERIES	30
SH378 MODEL	30
SSA00 SERIES	31
TW370-30 SERIES	31
150B MODEL	31
T372 MODEL	31
360 SERIES	32
350 SERIES	32
260 SERIES	33
244 MODEL	33
ALUMINUM STEPLADDER COMPARISON CHART	34
ALUMINUM EXTENSION LADDERS	35
500-1 SERIES	35
D500-2 SERIES	35
D1500-2/D1500-1 SERIES	36
560-3 MODEL	36
D1800-2EQ SERIES	37
D1700-2EQ SERIES	37
D1300-2 SERIES	37
D1200-2 SERIES	38
D1200-3 SERIES	38
D1100-2 SERIES	39
D716-2 MODEL	39
ALUMINUM EXT. LADDER COMPARISON CHART	40



THE #1 BRAND IN PROFESSIONAL CLIMBING EQUIPMENT

TABLE OF CONTENTS

SERIES/MODEL	PAGE
MULTILADDERS	41
MT SERIES	41
M1A SERIES	41
M1AA SERIES	42
ATTIC LADDERS	43
AH SERIES	43
AA MODEL	43
WH SERIES	44
W SERIES	44
ATTIC LADDER COMPARISON CHART	44
PORTABLE SCAFFOLDING	45
AP-SERIES	45
PS-48 MODEL	46
SRS-72 MODEL	46
WORK PLATFORMS	47
PA200 SERIES	47
5600 SERIES	47
5500 SERIES	47
5300 SERIES	47
PUMP JACKS	48
ALUMINUM PUMP JACK SYSTEM	48
STEEL PUMP JACK SYSTEM	49
SCAFFOLDING & STAGES	50
ALUMINUM TASK-MASTER® STAGES	50
GUARD RAIL SYSTEMS	51
ALUMINUM SCAFFOLD TOWERS	53
SCAFFOLD SECTIONS	54
SCAFFOLD COMPONENTS	55
SCAFFOLD/OUTRIGGER COMPONENT COMPARISON CHART	56
RAMPS, RACKS & MERCHANDISING	57
R522 MODEL - FOLDING ARCHED RAMPS	57
R402 MODEL - ARCHED RAMPS	57
R301 MODEL - STRAIGHT RAMPS	58
R102 MODEL - STRAIGHT RAMP KIT	58
TR401-S MODEL - TRUCK RACK	59
VR401-W MODEL - VAN RACK	60
MERCHANDISING MODULAR LADDER DISPLAYS & FIXTURES	60

SERIES/MODEL	PAGE
ACCESSORIES	61
HOW TO ORDER FACTORY INSTALLED ACCESSORY KITS	61
LOCK-IN ACCESSORIES (AC27-P, AC27-L, AC50-JB-3)	62
LOCK-IN ACCESSORIES (AC52-UB, AC54-JC, AC56-UH, AC58-TL)	63
STEPLADDER ACCESSORIES (AC11, PK76, 76, 21, 22, AC24, 40)	64
EXTENSION LADDER ACCESSORIES (LADDER JACKS, AC18MT, AC19, AC22, ROOF BRACKETS, AC20, AC78)	65
EXTENSION LADDER ACCESSORIES (AC96, PK70-1/APK70, PK70-2, PK70-3, PK80/APK80, A61, A62)	66
EXTENSION LADDER ACCESSORIES (64-2,66-1/A66-1, 71/A71, 72/A72, 74/A74, A78)	67
EXTENSION LADDER ACCESSORIES (81/A81, A82, A83, 86/A86, 89, 91, 92/A92)	68
EXTENSION & ATTIC LADDER ACCESSORIES (94, 97P, AC59, 36-82)	69
INDEX	70-71



THE BEST TOPS IN THE INDUSTRY



LOCKTOP™

Next generation ladder top holds an arsenal of tools



Customize your ladder top with the Lock-In Accessory System



Sturdy paint can hanger decreases chances of spilling



Keeps tools within easy reach with the HolsterTop®



Convenient pail shelf provides additional work surface



7400SERIES

★★★★★ **375lbs.** LOAD CAPACITY

TYPE IAA
DUTY RATING

STYLE: Stepladder



* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7403	3'	19-3/4"	24-3/8"	2.5	13.5
7404	4'	21-1/2"	30-1/2"	3.5	16.5
7405	5'	23-1/4"	36-3/4"	4.6	20.0
7406	6'	25"	42-7/8"	5.8	23.5
7407	7'	26-3/4"	49"	7.1	28.0
7408	8'	28-1/2"	55-1/4"	8.5	32.0
7410	10'	32"	67-1/2"	11.4	40.5
7412	12'	35-1/2"	79-7/8"	14.8	49.5

DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide





T7400SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA**
PER SIDE DUTY RATING

STYLE: Multi-Use Twin Stepladder††



* Energy Diffusing Geometry
 • Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS NOTE: Type IAA duty rating is for stepladders up to 12 ft.

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T7404	4'	21-1/2"	36-1/8"	4.5	21.5
T7405	5'	23-1/2"	43-1/8"	5.8	29.0
T7406	6'	25"	50-1/8"	7.3	30.0
T7408	8'	28-1/2"	64-1/8"	10.5	40.5
T7410	10'	32"	78-1/4"	14.2	51.5
T7412	12'	35-1/2"	92-1/4"	18.3	63.5

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

T7414	14'	39"	106-1/4"	22.8	86.0
T7416	16'	42-1/2"	120-1/4"	27.7	103.5
T7418	18'	46"	136-1/8"	33.1	126.0
T7420	20'	49-1/2"	150-1/8"	38.8	149.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8-1/4" x 14-1/2"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

P7400SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA**
PER SIDE DUTY RATING

STYLE: Platform Ladder



* Energy Diffusing Geometry
 • Every rivet backed up by metal plate or washer to protect rails
 • Internal aluminum spreaders on 8' and 10' models

SPECIFICATIONS NOTE: Type IAA duty rating is for platforms ranging in size from 3' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P7403	3'	5'	25-1/4"	35-7/8"	5.1	22.0
P7404	4'	6'	27"	42"	6.4	26.0
P7406	6'	8'	30-1/2"	54-3/8"	9.1	34.0
P7408	8'	10'	34"	66-5/8"	12.2	44.5

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

P7410	10'	12'	37-1/2"	79"	15.6	54.5
P7412	12'	14'	42"	91-1/4"	19.3	68.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

PT7400/PT7400-4C SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Stockr's Ladder[®]††



- Easy to handle and folds to a 12" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models
- Requires less floor space than heavy steel rolling ladders

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT7404	4'	6"	25-1/4"	50"	8.4	31.0	PT7404-4C	37.0
PT7406	6'	8"	28-3/4"	64"	12.7	41.5	PT7406-4C	53.0
PT7408	8'	10"	32-1/4"	78-1/4"	17.8	54.5	PT7408-4C	60.5
PT7410	10'	12"	35-3/4"	92-1/4"	23.7	66.0	PT7410-4C	72.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

E7400 SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Extension Trestle Ladder††

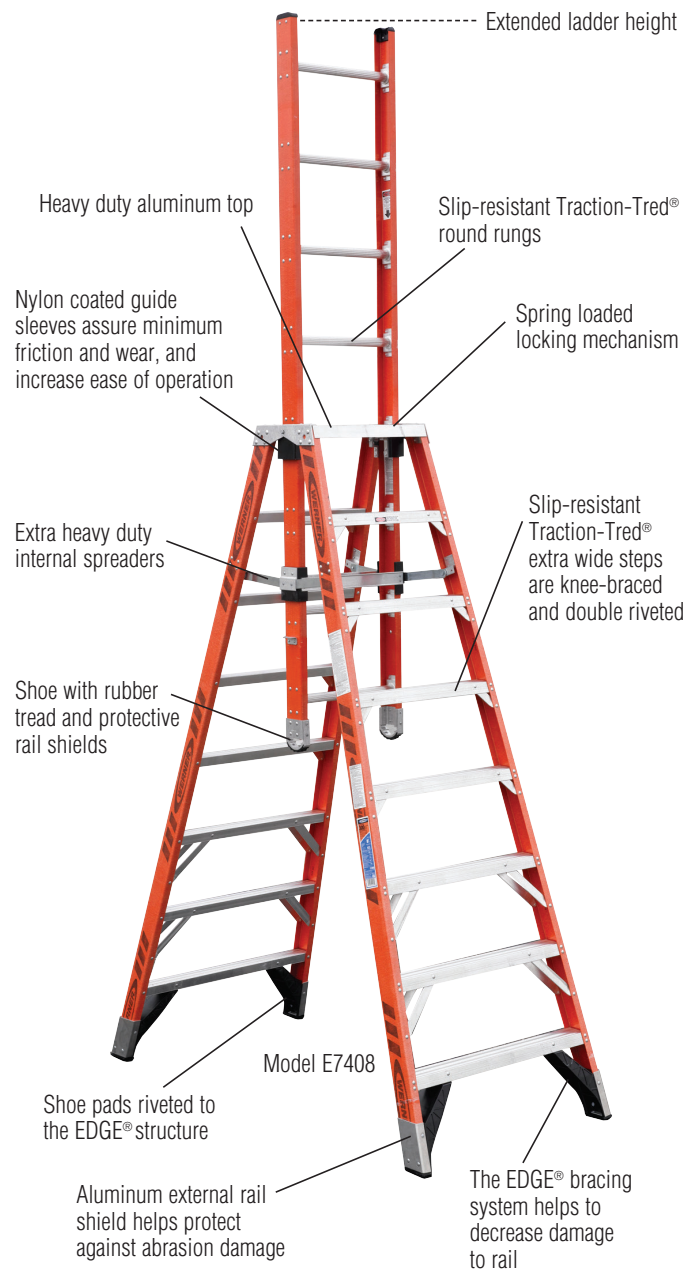

SPECIFICATIONS

Model No.	Stepladder Size	Base Section Bottom Width	Approx. Spread	Approx. Extended Ladder Height	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
E7408	8'	32-3/4"	67-3/4"	12'	16.6	74.0
E7410	10'	36-1/4"	81-7/8"	15'	22.2	95.5
E7412	12'	39-3/4"	95-7/8"	19'	28.3	113.5
E7414	14'	43-1/4"	109-3/4"	22'	35.1	135.5
E7416	16'	46-3/4"	123-3/4"	26'	42.4	158.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Extended Ladder		Stepladder	
Rails:	3-3/8" wide	Rails:	3-3/16" wide (8'-12') 3-5/16" wide (14'-16')
Rungs:	1-1/4"	Steps:	3" wide
Flange:	1-3/16" wide	Flange:	1-3/16" wide





OBEL00SERIES


★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Old Blue® Series Electrician's Jobstation™



COMPATIBLE
SEE PAGES 59-60

Customized HolsterTop® with Lock-In Accessory System secures tools from falling. 3 ToolLassos included.

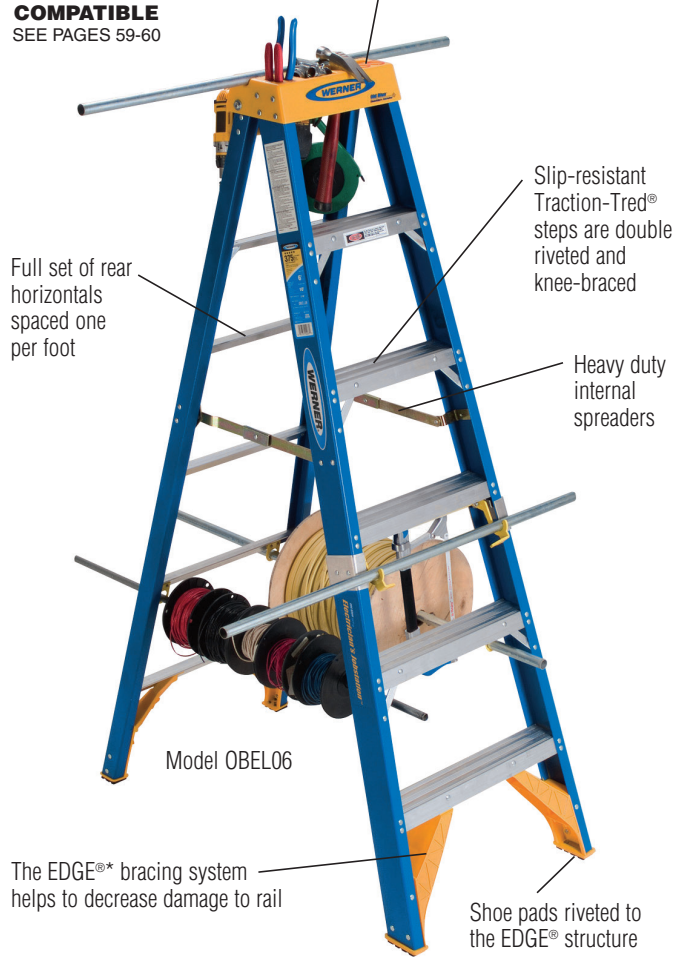

Convenient conduit cutting system



HolsterTop® customized for electricians



Built-in wire spool holders for both large and small spools

* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

® The blue and yellow ladder is an exclusive registered trademark of Werner Co.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
OBEL04	4'	19-7/8"	29"	3.0	16.0
OBEL06	6'	23-3/8"	41-1/4"	5.3	24.0
OBEL08	8'	26-7/8"	53-5/8"	8.1	32.0
OBEL10	10'	30-3/8"	65-7/8"	12.5	41.0
OBEL12	12'	33-7/8"	78-1/4"	15.0	51.5

DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

OBCN00SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Old Blue® Series Contractor's Jobstation™



COMPATIBLE
SEE PAGES 59-60

Customized HolsterTop® with Lock-In Accessory System secures tools from falling. 3 ToolLassos included.



MagnaGrip™ heavy duty magnet secures hardware



HolsterTop® customized for contractors



Multi-Use hook for hanging tools and buckets

* Energy Diffusing Geometry

- Every rivet backed up by metal part or washer to protect rails

® The blue and yellow ladder is an exclusive registered trademark of Werner Co.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
OBCN06	6'	23-3/8"	41-1/4"	5.3	23.0
OBCN08	8'	26-7/8"	53-5/8"	8.1	31.0

DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

7300SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Stepladder



- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
7303	3'	19-3/4"	23-1/2"	2.5	13.0	7303S	16.5
7304	4'	21-1/2"	29-3/4"	3.5	16.0	7304S	19.5
7305	5'	23-1/4"	35-7/8"	4.6	19.5	7305S	23.0
7306	6'	25"	42"	5.8	22.5	7306S	26.0
7308	8'	28-1/2"	54-3/4"	8.5	31.0	7308S	34.0
7310	10'	32"	66-5/8"	11.4	40.5	7310S	43.5
7312	12'	35-1/2"	79"	14.8	50.0	7312S	53.0

DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

6200SERIES

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Stepladder



Next generation ladder top holds an arsenal of tools



- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Optional yellow molded pail shelf kit, model no. 76-2

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6203	3'	18-1/8"	23-1/8"	2.0	13.0
6204	4'	19-7/8"	29"	3.0	16.0
6205	5'	21-5/8"	35-1/8"	4.1	19.0
6206	6'	23-3/8"	41-1/4"	5.3	22.0
6207	7'	25-1/8"	47-1/2"	6.6	26.0
6208	8'	26-7/8"	53-5/8"	8.1	30.0
6210	10'	30-3/8"	65-7/8"	12.5	39.0
6212	12'	33-7/8"	78-1/4"	15.0	48.0

DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide






T6200 SERIES

★★★★ **300 lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Twin Stepladder††

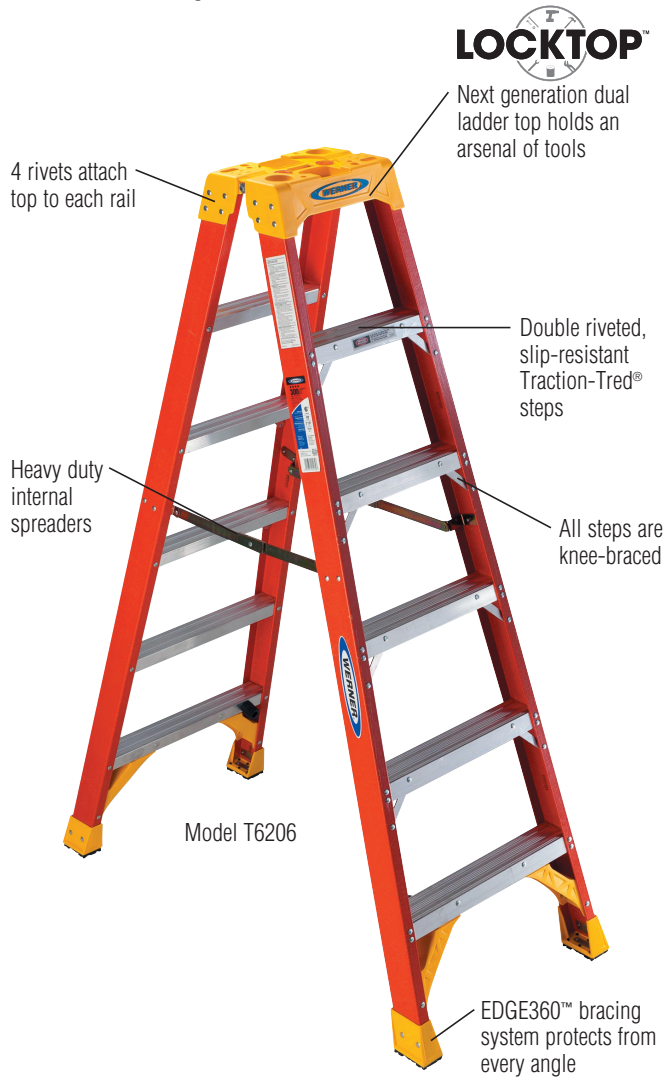

Model T6206

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6203	3'	18-1/8"	29"	3.1	16.0
T6204	4'	19-7/8"	36-1/8"	4.6	19.0
T6205	5'	21-5/8"	43-1/8"	6.2	23.0
T6206	6'	23-3/8"	50-1/8"	8.0	27.0
T6208	8'	26-7/8"	64-1/8"	12.3	37.0
T6210	10'	30-3/8"	78-1/8"	17.3	54.5
T6212	12'	33-7/8"	92-1/8"	23.2	68.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8-1/2" x 13"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

C6200 SERIES

★★★★ **300 lbs.** LOAD CAPACITY **TYPE IA**
DUTY RATING

STYLE: Compact Stepladder



Model C6204

- Lightweight and compact slim design makes it easy to maneuver around corners and tight spaces
- The lightweight fiberglass construction makes it easy to carry and store

* On 5ft and above models

SPECIFICATIONS

Model No.	Top Platform Height	Max. Reach	Compact Ladder Height	Comparable Stepladder Height	Approx. Shipping Wt. Lbs.
C6204	1' 11"	8'	3.5'	4'	11
C6205	2' 10"	9'	4.5'	5'	15
C6206	3' 9"	10'	5.5'	6'	18
C6207	4' 8"	11'	6.5'	7'	20
C6208	5' 8"	12'	7.5'	8'	22

DIMENSIONS

Platform:	10.5" x 13"	Steps:	3" wide
Front Rails:	17" wide	Rear Rails:	1-1/4" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

P6200SERIES

★★★★ **300lbs.** LOAD CAPACITY TYPE IA DUTY RATING

STYLE: Platform Ladder



- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P6202	2'	4'	23-3/8"	29-3/4"	4.2	17.0
P6204	4'	6'	26-7/8"	42"	7.2	24.0
P6206	6'	8'	30-3/8"	54-3/4"	10.9	32.0
P6208	8'	10'	33-7/8"	66-5/8"	15.2	44.5
P6210	10'	12'	37-3/8"	79"	20.1	55.0

DIMENSIONS

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

FTP6200SERIES

★★★★ **300lbs.** LOAD CAPACITY TYPE IA DUTY RATING

STYLE: Tripod Stepladder



Single rear rail allows FTP Series to rest where other ladders can't



Convenient spreader handle design improves setup and transportability



Makes working in tight spaces easy

- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
FTP6204	4'	31"	30-1/2"	3.7	17.0
FTP6206	6'	36"	43-3/4"	6.8	23.0
FTP6208	8'	40"	57"	10.1	31.0
FTP6210	10'	51"	71"	17.6	42.0
FTP6212	12'	54"	77-3/4"	22.6	51.0

DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rail:	1-1/2" square (4' to 8'), 2" square (10' and 12')
Flange:	1-3/16" wide		






SSFOOSERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Step Stand

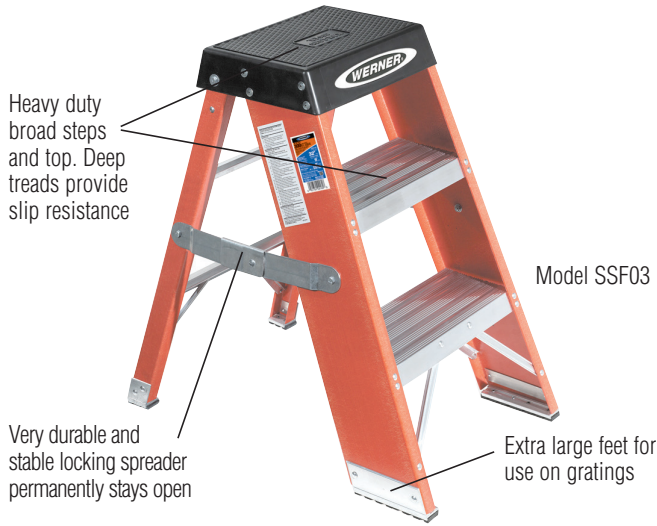

SPECIFICATIONS

Model No.	Size	Maximum Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSF02	2'	20"	17"	21"	2.6	15.0
SSF03	3'	30"	18-3/4"	27-1/2"	4.0	19.5


DIMENSIONS

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

TW6200SERIES

★★★★★ **300lbs.** LOAD CAPACITY **PER SIDE** **TYPE IA** DUTY RATING

STYLE: Portable Work Stand^{††}

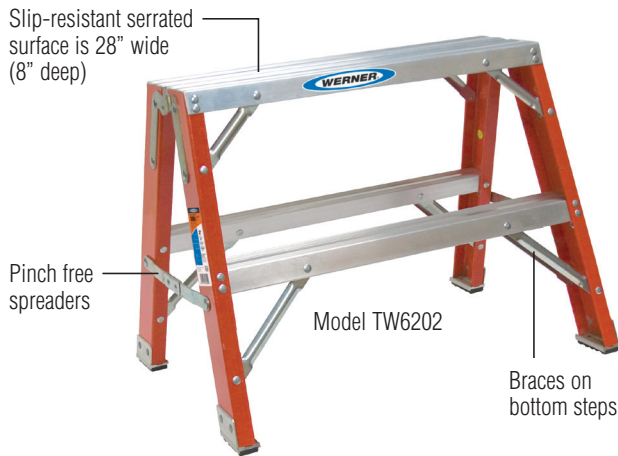

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW6202	2'	31-1/4"	22-1/4"	3.0	17.0
TW6203	3'	32-3/4"	29-3/4"	4.7	24.0

^{††}Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8" x 28"	Steps:	3" wide
Rails:	3-1/4" wide	Flange:	1-3/16" wide

6202MODEL

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Step Stool



SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6202	2'	17-1/4"	19-1/2"	1.4	9.0


DIMENSIONS

Top:	5-5/8" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide, 5/8" wide front

T6202MODEL

★★★★★ **300lbs.** LOAD CAPACITY **PER SIDE** **TYPE IA** DUTY RATING

STYLE: Twin Step Stool^{††}

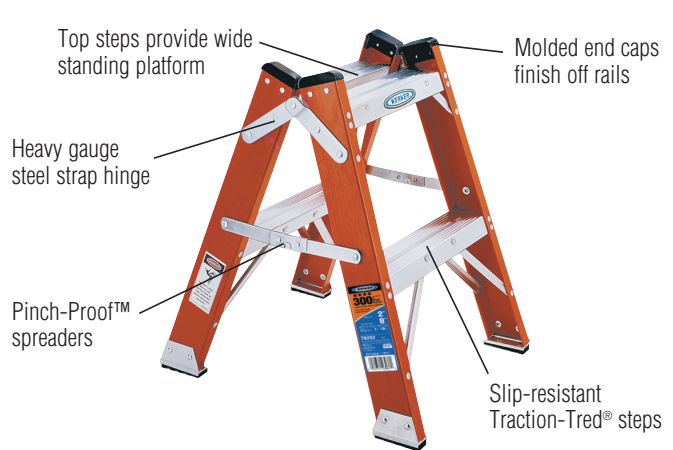

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6202	2'	21-1/8"	23"	2.1	11.5

^{††}Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Steps:	3" wide
Rails:	3-1/8" wide
Flange:	1-3/16" wide

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.

6100SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING


STYLE: Stepladder



COMPATIBLE
SEE PAGES 59-60



Model 6106



The Lock-In Accessory System lets you customize your ladder top and safely secure your tools.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6104	4'	19"	28-7/8"	2.6	15.0
6106	6'	22"	41-1/8"	4.5	21.0
6108	8'	25"	53-1/2"	6.8	30.0
6110	10'	28"	65-3/4"	13.0	35.5
6112	12'	31"	78-1/8"	17.3	44.0

DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Flange:	1-3/16" wide		

6002MODEL

★★★ **250lbs.** LOAD CAPACITY **TYPE I** DUTY RATING

STYLE: Step Stool



©The blue and yellow ladder is an exclusive registered trademark of Werner Co.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6002	2'	17-1/4"	19-1/2"	1.4	8.5

DIMENSIONS

Top:	5-5/8" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front




6000 & 6000S SERIES

★★★ 250lbs. LOAD CAPACITY TYPE I DUTY RATING

STYLE: Stepladder



COMPATIBLE
SEE PAGES 59-60

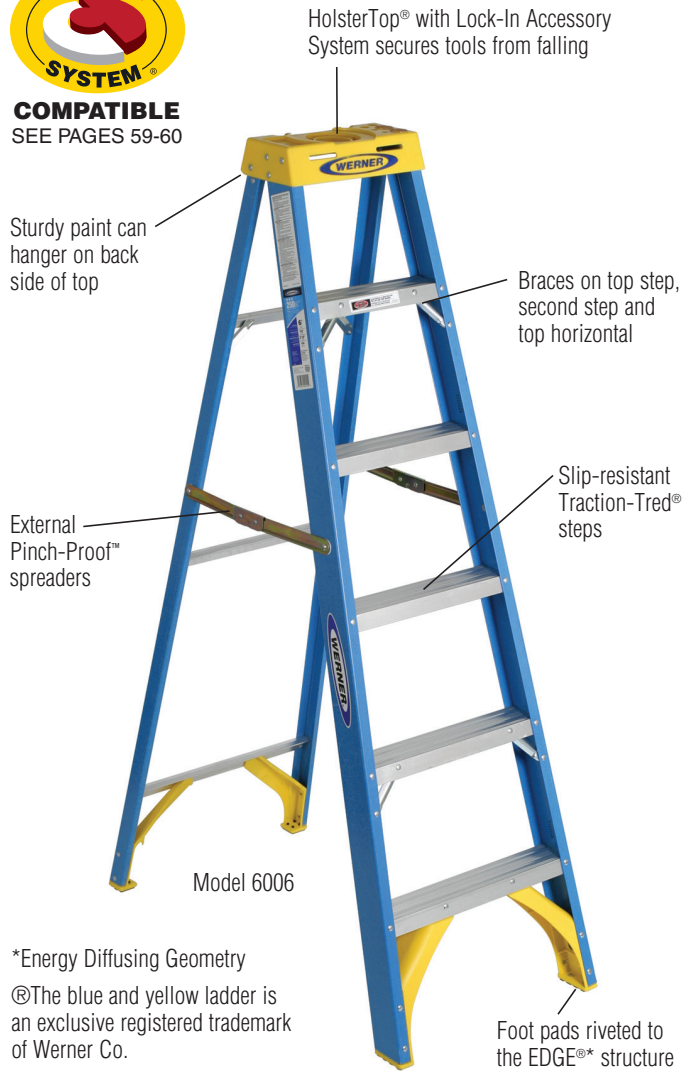

Model 6006

*Energy Diffusing Geometry
®The blue and yellow ladder is an exclusive registered trademark of Werner Co.



The Lock-In Accessory System lets you customize your ladder top and safely secure your tools.

EDGE®* bracing provides enhanced strength and increased protection against damage

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
6004	4'	19"	28-7/8"	2.6	13.0	6004S	15.0
6005	5'	20-1/2"	35"	3.5	16.0	6005S	18.0
6006	6'	22"	41-1/8"	4.5	18.0	6006S	20.0
6008	8'	25"	53-1/2"	6.8	25.5	6008S	27.5


DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front

T6000 SERIES

★★★ 250lbs. LOAD CAPACITY PER SIDE TYPE I DUTY RATING

STYLE: Multi-Use Twin Stepladder^{††}

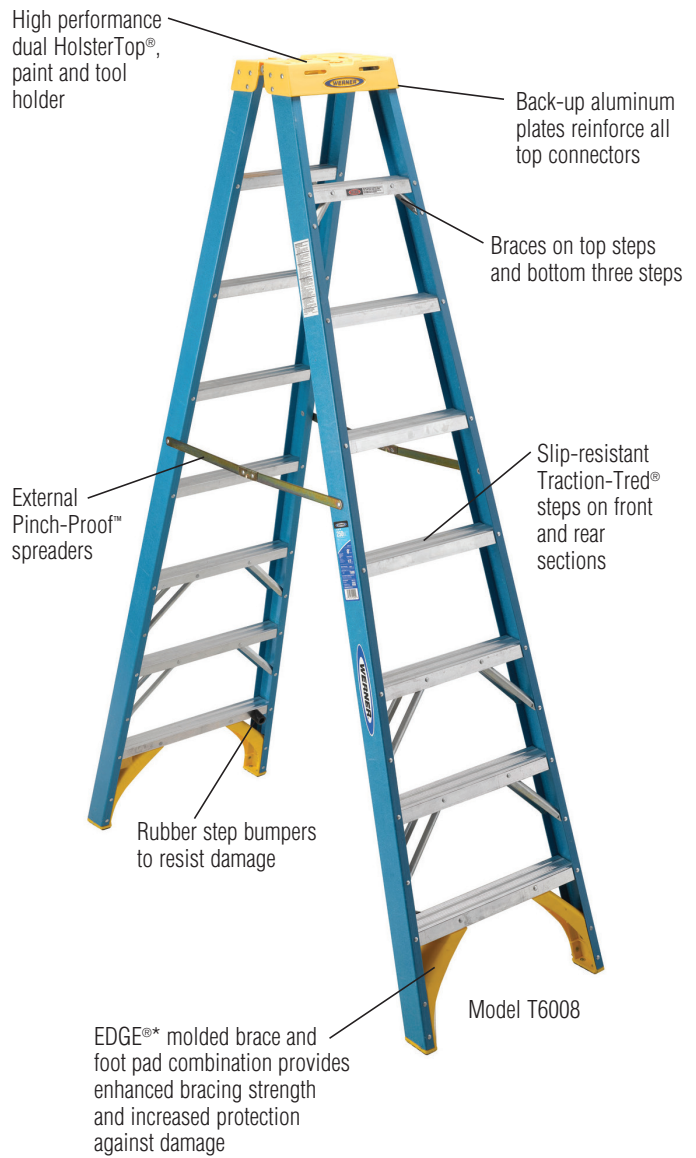

Model T6008

* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails
- ® The blue and yellow ladder is an exclusive registered trademark of Werner Co.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6004	4'	19"	36-1/8"	4.5	17.5
T6006	6'	22"	50-1/8"	7.9	24.5
T6008	8'	25"	64-1/8"	11.9	35.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8-1/2" x 13"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide

PT6000/PT6000-4C SERIES

★★★ **250 lbs.** LOAD CAPACITY **TYPE I**
PER SIDE DUTY RATING

STYLE: Stocker's Ladder®††



- Easy to handle and folds to a 12" width for storage
- Unique combination of one person, platform ladder or two person use††
- External Pinch-Proof™ spreaders on 8' model
- Requires less floor space than heavy steel rolling ladders

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT6002	2'	4'	20"	36-1/2"	6.4	21.0	PT6002-4C	27.0
PT6003	3'	5'	22"	44"	8.5	24.5	PT6003-4C	31.0
PT6004	4'	6'	23"	51"	11.1	28.0	PT6004-4C	35.0
PT6006	6'	8'	26"	65-1/2"	16.7	39.0	PT6006-4C	47.0
PT6008	8'	10'	29"	80"	23.4	52.0	PT6008-4C	64.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide

5900 & 5900S SERIES

★★ **225 lbs.** LOAD CAPACITY **TYPE II**
DUTY RATING

STYLE: Stepladder



COMPATIBLE
 SEE PAGES 59-60



* Energy Diffusing Geometry

- Optional yellow molded pail shelf kit, model no. 76-9 or PK76-9 available for 5900 series

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
5904	4'	19"	28-7/8"	2.6	11.5	N/A	N/A
5906	6'	22"	41-1/8"	4.5	16.0	5906S	16.5
5908	8'	25"	53-1/2"	6.8	22.5	5908S	23.0

DIMENSIONS

Top:	5-3/8" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide





FIBERGLASS STEPLADDER COMPARISON CHART


Features and Benefits	7400 SERIES	T7400 SERIES	P7400 SERIES	7300 SERIES	6200 SERIES	T6200 SERIES	P6200 SERIES	6100 SERIES	6000 SERIES	T6000 SERIES	5900 SERIES
	TYPE IAA	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA	TYPE IA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE I	TYPE II
Slip-resistant Traction-Tred® steps	★	★	★	★	★	★	★	★	★	★	★
Slip-resistant foot pad	★	★	★	★	★	★	★	★	★	★	★
LOCKTOP™					★	★					
Aluminum drill HolsterTop®	★			★							
HolsterTop®								★	★	★	★
Aluminum top		★									
Lock-In Accessory System					★			★	★		★
Designed for one or two person jobs		★								★	
Slip-resistant Traction-Tred® steps all knee braced	★	★	★	★	★	★	★				
Molded braces	★	★	★	★	★	★	★		★	★	★
Rail shields	★	★	★	★	★	★	★				
Oversized Foot Pads				★	★	★	★				
Internal spreaders	★	★		★	★	★		★			
External spreaders									★	★	★
Full set of rear horizontals	★		★	★	★		★	★			
Platform for comfortable work area			★				★				
Shoulder bolt and nut on top hinge	★	★	★	★		★	★			★	
Back-up plates to reinforce top connectors	★	★	★	★	★	★	★	★	★	★	★
Every rivet backed up by metal plate or washer to protect fiberglass	★	★	★	★	★	★	★	★	★	★	★
4 rivets attach top to each front rail	★	★	★	★	★	★	★	★			

L6200SERIES

★★★★★ **300/lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

FIBERGLASS

For working around electricity
Non-conductive side rails

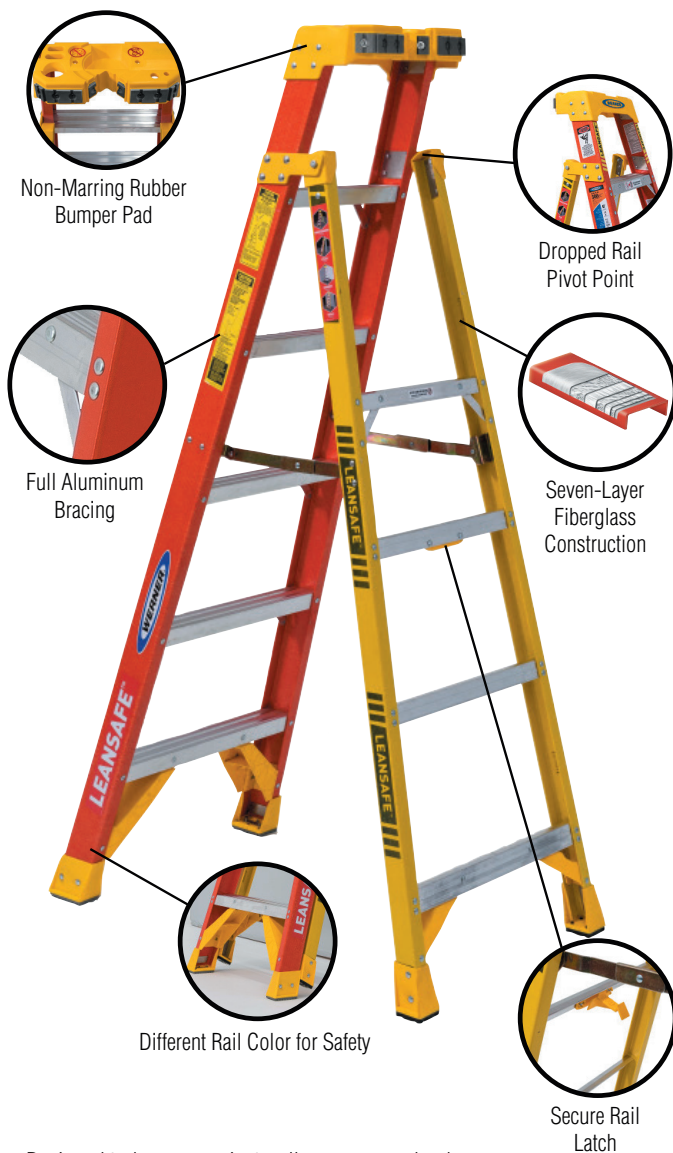

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

SPECIFICATIONS

Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L6204	4'	1'-8"	8'-4"	10"	7'-3"
L6206	6'	3'-10"	10'	2'-10"	9'
L6208	8'	5'-9"	12'	4'-9"	11'
L6210	10'	7'-8"	14'	6'-8"	13'
L6212	12'	9'-7"	16'	8'-7"	15'

*assumes a 5'-6" person with a vertical 12" reach

L7300SERIES

★★★★★ **375/lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

FIBERGLASS

For working around electricity
Non-conductive side rails



- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

SPECIFICATIONS

Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L7304	4'	1'-8"	8'-4"	10"	7'-3"
L7306	6'	3'-10"	10'	2'-10"	9'
L7308	8'	5'-9"	12'	4'-9"	11'
L7310	10'	7'-8"	14'	6'-8"	13'
L7312	12'	9'-7"	16'	8'-7"	15'

*assumes a 5'-6" person with a vertical 12" reach



NEW LADDER STYLE



PODIUM PODIUM GATE



Extended guard rail securely wraps around work zone and holds an arsenal of tools



Extra-large standing platform for long standing comfort



Folds up for storage



Fully surrounds the user



Latch keeps the user inside the ladder footprint

Work facing any direction

- **4X WORK ZONE**
Allows you to work facing any direction so you can accomplish more without having to reposition your ladder.
- Ideal for working at fixed heights and easier to maneuver than scaffolds or lifts.
- Feel like you're standing on the ground with the extra-large platform, 36" high extended guard rail and LOCKTOP™ wrap around ladder top.
- Available in Type IAA (375lb capacity) and Type IA (300lb capacity) Duty Ratings
- Available with factory-installed casters for improved mobility
- For working around electricity. Non-conductive side rails.

Attaches to any Werner Podium

- Easily retrofitted; convenient and affordable
- Fully surrounds the user
- Helps keep the ladder user inside the ladder footprint
- Work facing any direction
- Neatly collapses for easy access and storage



SPECIFICATIONS

Model No.	Fits On	Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs
AC63	All Podium Ladders	4.8" x 28" x 4.2"	6

* Ladder sold separately

PD7300/PD7300-4C SERIES

★★★★★ **375 lbs.** LOAD CAPACITY TYPE IAA DUTY RATING

STYLE: Podium Ladder



COMPATIBLE SEE PAGES 59-60



Extended guard rail holds an arsenal of tools

4 rivets attach top to each rail

Extra Large Platform with toe guard

Full set of rear horizontals spaced one per foot

Double riveted, slip-resistant Traction-Tred® steps

All steps are knee-braced

Model PD7304



PD7300-4C series features durable caster assemblies with stainless steel springs & heavy duty step braces

EDGE360™ bracing system protects from every angle

- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 6' and 8' models

SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PD7303	3'	9'	26"	37"	9.2	21.0	PD7303-4C	28.3
PD7304	4'	10'	27-1/2"	43"	11.3	26.5	PD7304-4C	33.8
PD7306	6'	12'	31"	56"	16.4	38.5	PD7306-4C	45.8
PD7308	8'	14'	34-1/2"	68"	22.3	45.5	PD7308-4C	52.8

DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

PD6200/PD6200-4C SERIES

★★★★★ **300 lbs.** LOAD CAPACITY TYPE IA DUTY RATING

STYLE: Podium Ladder



COMPATIBLE SEE PAGES 59-60



Extended guard rail holds an arsenal of tools

4 rivets attach top to each rail

Podium step with toe guard

Full set of rear horizontals spaced one per foot

Double riveted, slip-resistant Traction-Tred® steps

All steps are knee-braced

Model PD6204



PD6200-4C series features durable caster assemblies with stainless steel springs & heavy duty step braces

EDGE360™ bracing system protects from every angle

- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PD6203	3'	9'	26"	37"	9.2	21.0	PD6203-4C	28.3
PD6204	4'	10'	27-1/2"	43"	11.3	26.5	PD6204-4C	33.8
PD6206	6'	12'	31"	56"	16.4	32.5	PD6206-4C	39.8
PD6208	8'	14'	34-1/2"	68"	22.3	44.5	PD6208-4C	51.8
PD6210	10'	16'	38"	80"	29.1	55.5	PD6210-4C	62.8

DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide





NEW LADDER STYLE



Multi-Position Fiberglass Pro



300lb load capacity per side



Scaffolding bases require no additional hinges*
*plank and tie-downs not included

FIVE LADDERS IN ONE

Extension ladder



Wall ladder



Twin stepladder



Stairway stepladder



2-scaffold bases*



FMT SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Multi-Position Ladder



- Non-conductive side rails
- Impact resistant push knobs
- Shatter-Proof J-locks
- Type IA, 300 lb. rating
- Double riveted rungs
- Catch-free bracing
- Slip resistant feet

SPECIFICATIONS

Model No.	Stepladder Height (ft)	Stairway Height (ft)	Wall Height (ft)	Extension Height (ft)	Scaffold Height (ft)	Weight (lbs)
FMT-13	3 to 5	3 to 5	3 to 5	7 to 11	1 to 2	33.2
FMT-17	4 to 7	4 to 7	4 to 7	9 to 15	1 to 3	39.9
FMT-22	5 to 9	5 to 9	5 to 9	11 to 19	1 to 4	49.9

DIMENSIONS

Rails:	2-5/8"	Rung:	1-1/8"
Flange:	1"	Steps/Rung:	1"

NEW LADDER STYLE



Dual Purpose 2-IN-1 Ladder



Oversized PROGUARD BOOTS for added rail protection



Convenient to store and maneuver




Comfortable double width standing platform

DP6200SERIES

★★★★ **300lbs.** LOAD CAPACITY

TYPE IA
DUTY RATING


STYLE: Dual-purpose Ladder

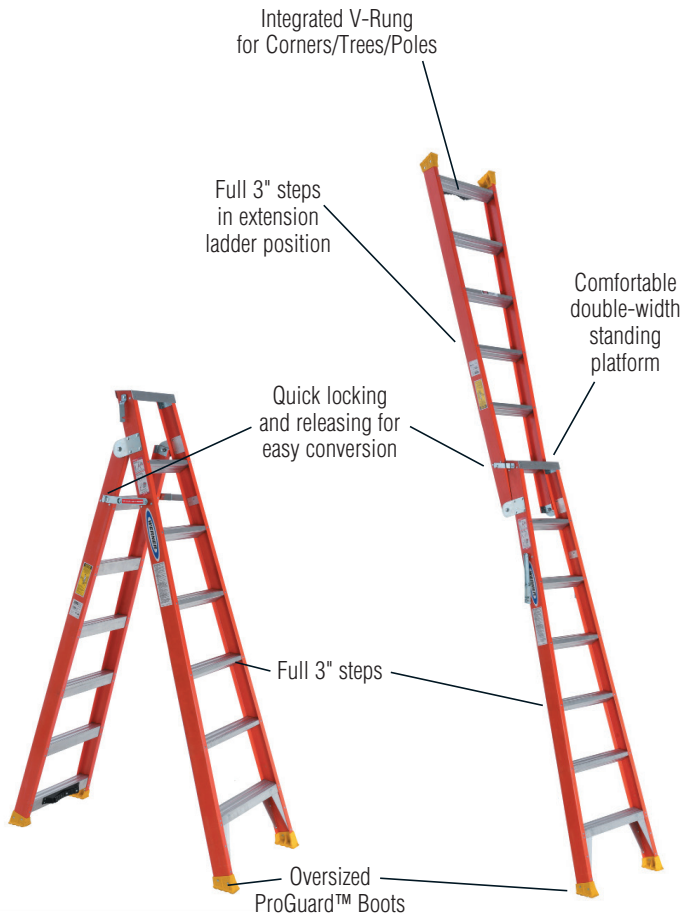

FLIP & CLICK



Open and secure latches on both sides
Abra y asegure los seguros en ambos lados



Flip open and secure latches on both sides
Gire para abrir y asegure los seguros en ambos lados

WERNER DUAL PURPOSE

- One ladder to carry on the job
- Easy to use: Flip & Click to extension ladder position
- Easy to transport on compact vehicles
- Stepladder standing comfort on an extension ladder (3 steps)
- V-Rung for use on poles, trees and corners

Ideal for electricians, HVAC and independent contractors

SPECIFICATIONS

Model No.	Stepladder Size	Stepladder Max. Reach Height	Extension Ladder Size	Extension Max. Reach Height	Approx. Weight
DP6206	6'	10'	14'	13'	25.4 lbs.
DP6207	7'	11'	16'	15'	29.4 lbs.
DP6208	8'	12'	18'	17'	33.8 lbs.

DIMENSIONS

Top:	5-3/4" x 13"	Platform:	16" x 6" (extension position)
Front Rails:	3-1/8" wide	Rear Rails:	3-1/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

FIBERGLASS DUAL PURPOSE 2-IN-1 LADDER

FOR WORKING AROUND ELECTRICITY. NON-CONDUCTIVE SIDE RAILS.






D7100-2LV SERIES

★★★★★ **375lbs.** LOAD CAPACITY TYPE IAA DUTY RATING

STYLE: D-Rung Extension Ladder with Integrated Leveling

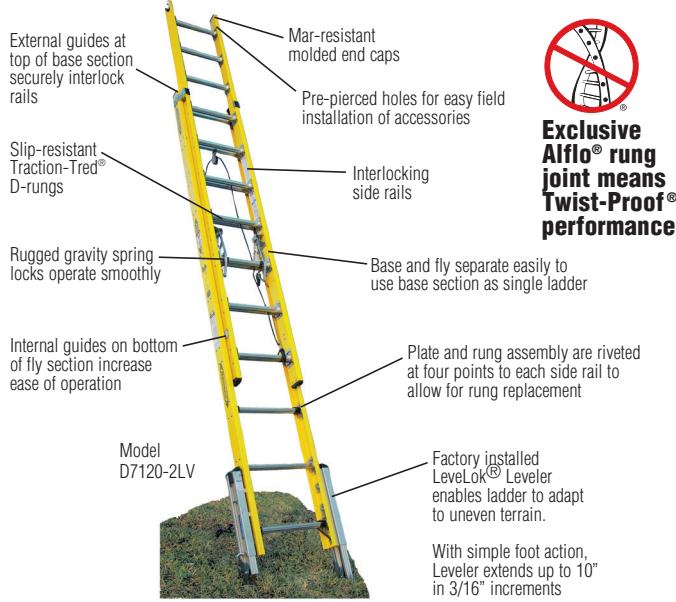

Exclusive Alflo® rung joint means Twist-Proof® performance

SPECIFICATIONS NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7120-2LV	20'	17'	8.6	58.0
D7124-2LV	24'	21'	10.3	66.5
D7128-2LV	28'	25'	12.0	75.0
D7132-2LV	32'	29'	13.7	90.5

★★★★★ **300lbs.** LOAD CAPACITY TYPE IA DUTY RATING

D7136-2LV	36'	32'	20.2	121.0
D7140-2LV	40'	35'	22.5	134.5


DIMENSIONS

	Rails:	Flange:	Rungs:	Fly Width:	Base Width:
20' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails	19" outside rails, 22-3/4" outside shoes
36' & 40'	4"	1-3/4"	1-3/4"	16-3/4" outside rails	22" outside rails, 25-3/4" outside shoes

D7100-2GHV SERIES

★★★★★ **375lbs.** LOAD CAPACITY TYPE IAA DUTY RATING


STYLE: Fiberglass High Visibility Extension Ladder

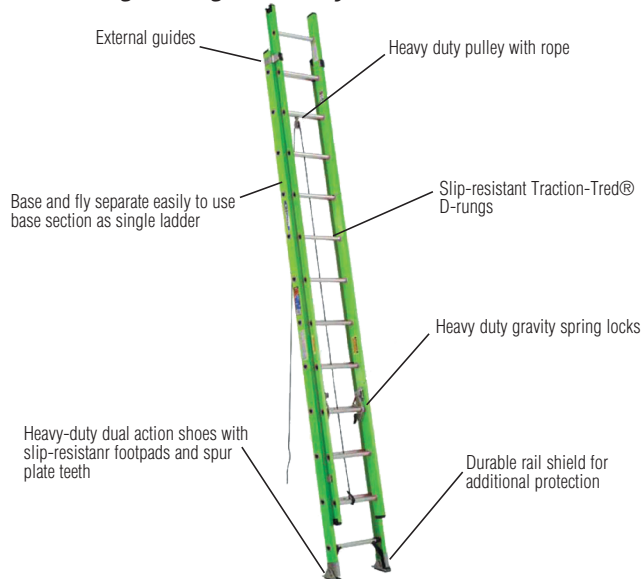

D7100-2 SERIES

★★★★★ **375lbs.** LOAD CAPACITY TYPE IAA DUTY RATING

STYLE: D-Rung Extension Ladder

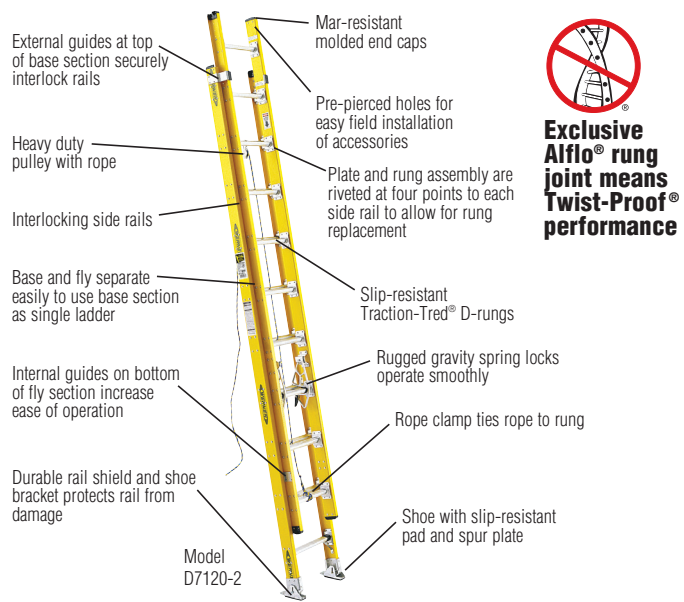

Exclusive Alflo® rung joint means Twist-Proof® performance

SPECIFICATIONS NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7116-2‡	16'	13'	7.0	41.0
D7120-2	20'	17'	8.7	50.0
D7124-2	24'	21'	10.3	58.5
D7128-2	28'	25'	12.0	67.0
D7132-2	32'	29'	13.7	82.5

★★★★★ **300lbs.** LOAD CAPACITY TYPE IA DUTY RATING

D7136-2	36'	32'	23.8	113.0
D7140-2	40'	35'	26.7	126.5

‡ Note: D7116-2 is not equipped with rope and pulley

DIMENSIONS

	Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails	19" outside shoes
36' and 40'	4"	1-3/4"	1-3/4"	16-3/4" outside rails	22" outside shoes



Exclusive Alflo® rung joint means Twist-Proof® performance

SPECIFICATIONS NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Shipping Wt. Lbs.
D7116-2GHV	16'	13'	36.0
D7120-2GHV	20'	17'	44.0
D7124-2GHV	24'	21'	51.0
D7128-2GHV	28'	25'	58.0

DIMENSIONS

	Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16' to 28'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails	19" outside rails, 22-3/4" outside shoes


7100-2/7100-1 SERIES

★★★★★ **375 lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Round Rung Extension/Straight Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

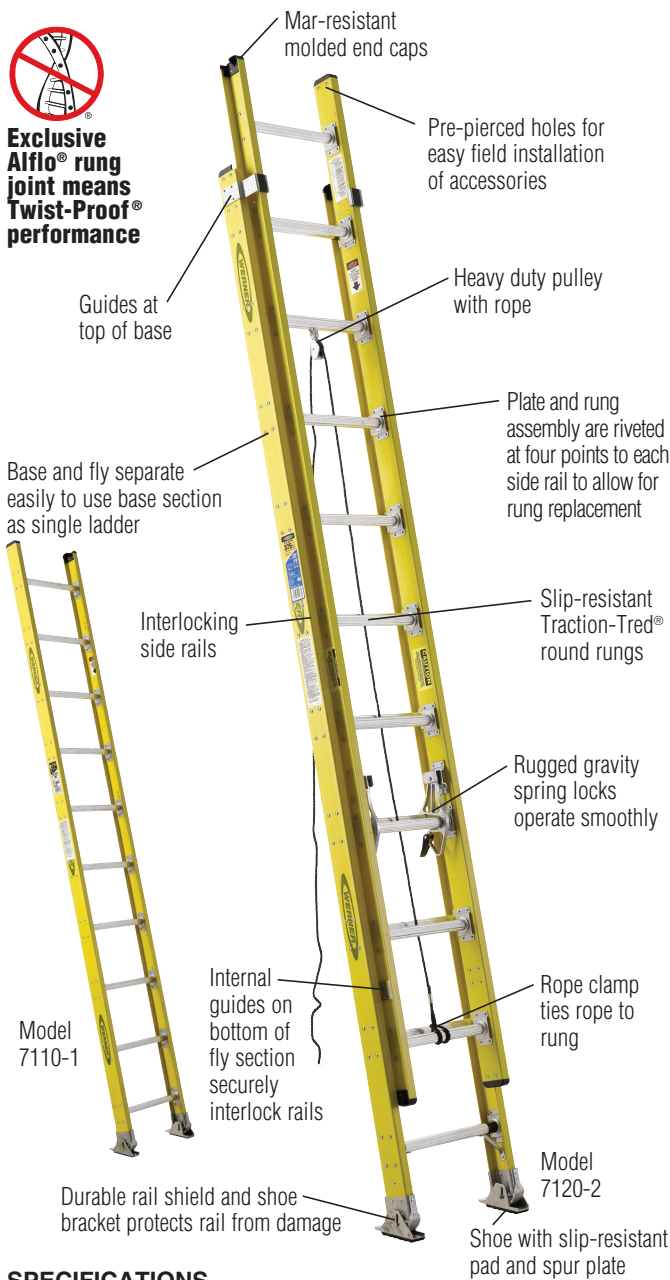

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Straight Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7116-2†	16'	13'	7.0	38.5	7108-1	8'	4.5	20.0
7120-2	20'	17'	8.7	47.0	7110-1	10'	5.5	24.0
7124-2	24'	21'	10.3	55.0	7112-1	12'	6.5	28.0
7128-2	28'	25'	12.0	63.0	7114-1	14'	7.6	32.0
7132-2	32'	29'	13.7	78.0	7116-1	16'	8.6	40.0

★★★★★ **300 lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

--	--	--	--	--	7118-1	18'	12.5	52.0
--	--	--	--	--	7120-1	20'	13.9	58.0

† Note: 7116-2 is not equipped with rope and pulley

DIMENSIONS

	Rails:	Flange:	Rungs:	Width (outside rails):	Width (outside shoes):
7100-2: ALL 7100-1: 8' to 16'	3-5/16"	1-3/16"	1-1/4"	17-3/4" outside rails	19" outside shoes
7118-1, 7120-1	4"	1-3/4"	1-1/4"	16-13/16" outside rails	18-1/16" outside shoes

D8200-2EQ SERIES


★★★★★ **300 lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Extension Ladder with Integrated Leveling



Exclusive Alflo® rung joint means Twist-Proof® performance

THE Equalizer®
ELIMINATES UNEVEN GROUND

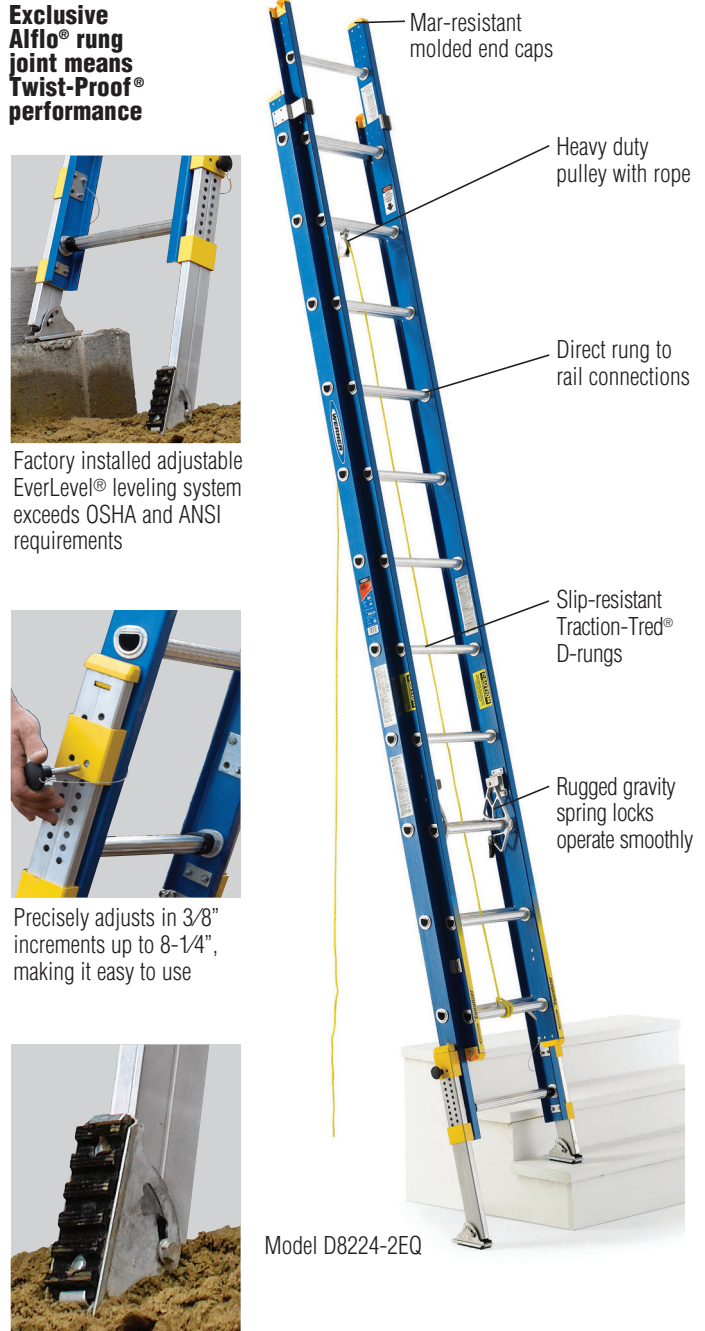

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D8220-2EQ	20'	17'	10.0	54.0
D8224-2EQ	24'	21'	11.9	62.0
D8228-2EQ	28'	25'	13.8	70.0

DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside rails, 21-7/16" outside of feet
Rungs:	1-5/8"		





LIGHTWEIGHT PERFORMANCE SERIES

STYLE: Lightweight Extension Ladder



SAME PERFORMANCE
as 7100-2, D7100-2 & D6200-2 series,
LIGHTER WEIGHT



New Fiberglass Technology allows ladder to be up to **12% lighter!**

- D7200-2 Series equipped with D-rungs
- 7200-2 Series equipped with round rungs

D7200-2/7200-2 SERIES

★★★★★ **375 lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7216-2†	16'	13'	7.0	36.0
D7220-2	20'	17'	8.7	44.0
D7224-2	24'	21'	10.3	51.0
D7228-2	28'	25'	12.0	58.0
D7232-2	32'	29'	13.7	65.0
7216-2	16'	13'	7.0	34.0
7220-2	20'	17'	8.7	42.0
7224-2	24'	21'	10.3	49.0
7228-2	28'	25'	12.0	56.0
7232-2	32'	29'	13.7	63.0

† Note: D7216-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16-1/8" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		



Exclusive Alflo® rung joint means Twist-Proof® performance

External guides at top of base section securely interlock rails.

Interlocking side rails

Base and fly separate easily to use base section as single ladder

Rugged gravity spring locks operate smoothly

Internal guides on bottom of fly section securely interlock rails

Rope clamp ties rope to rung


Mar-resistant molded end caps

Pre-pierced holes for easy field installation of accessories

Heavy duty pulley with rope

Slip-resistant Traction-Tred® D-rungs

Durable rail shield bracket and shoe with Shu-Lok®, slip-resistant pad and spur plate

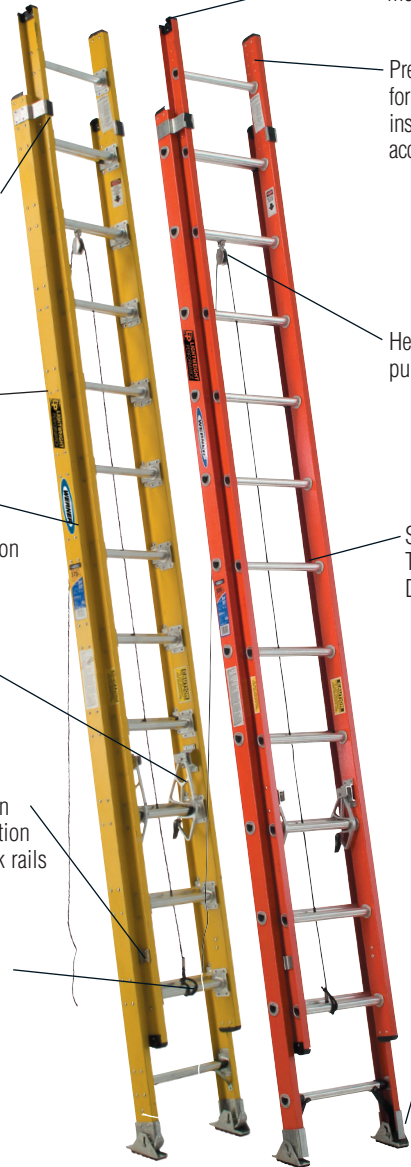

Model D7224-2

Model D6424-2

D6400-2 SERIES

★★★★★ **300 lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6416-2†	16'	13'	7.0	32.0
D6420-2	20'	17'	8.7	40.0
D6424-2	24'	21'	10.3	46.0
D6428-2	28'	25'	12.2	53.0
D6432-2	32'	29'	13.7	60.0

† Note: D6416-2 is not equipped with rope and pulley


DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		

D6200-2/D6200-1 SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: D-Run Extension/Straight Ladder

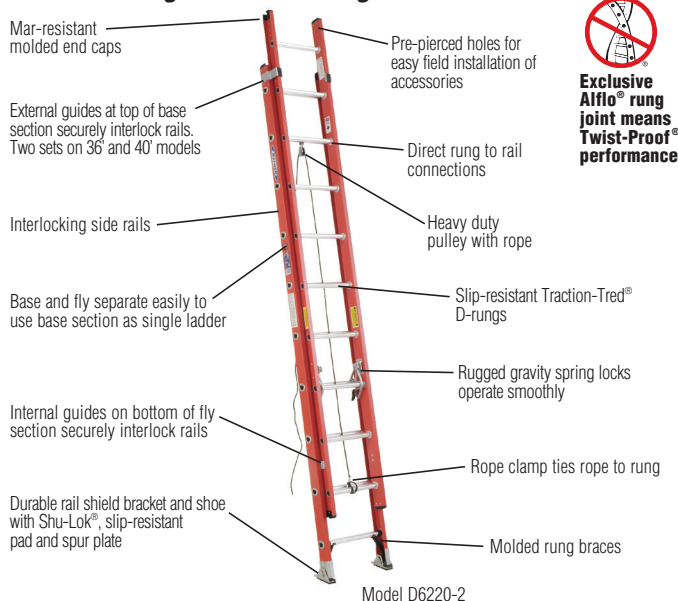

Exclusive Alflo® rung joint means Twist-Proof® performance

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-2‡	16'	13'	7.0	36.5	D6208-1	8'	4.7	19.5
D6220-2	20'	17'	8.7	44.5	D6210-1	10'	5.8	23.0
D6224-2	24'	21'	10.3	52.0	D6212-1	12'	6.9	27.0
D6228-2	28'	25'	12.0	59.5	D6214-1	14'	8.0	31.0
D6232-2	32'	29'	13.7	71.5	D6216-1	16'	9.1	37.0
D6236-2	36'	32'	15.3	80.5	--	--	--	--
D6240-2	40'	35'	17.0	88.5	D6220-1	20'	11.5	45.5

‡ Note: D6216-2 is not equipped with rope and pulley

DIMENSIONS


Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		

D6200-2GHV SERIES

★★★★ **300lbs.** LOAD CAPACITY

TYPE IA DUTY RATING


STYLE: Fiberglass High Visibility Extension Ladder

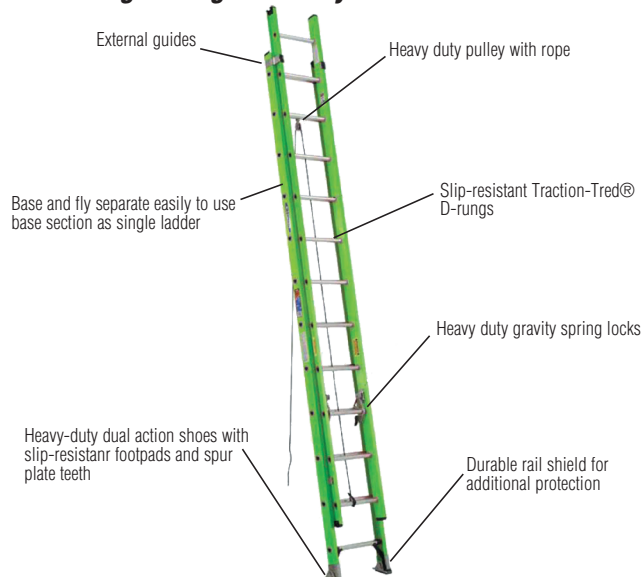

D6200-3 SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: D-Run Compact Extension Ladder

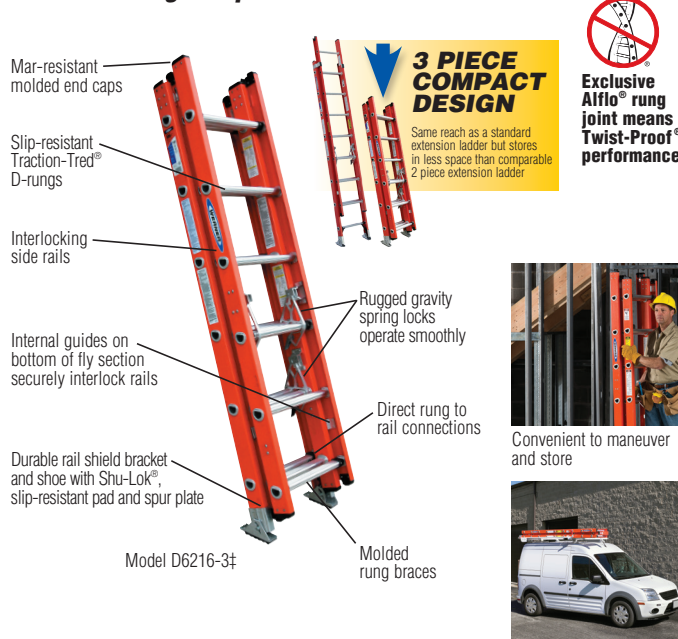

Exclusive Alflo® rung joint means Twist-Proof® performance

‡ Note: D6216-3 is not equipped with rope and pulley

SPECIFICATIONS

Model No.	Total Length of Sections	Total Length in Storage Position 2 vs. 3 piece*	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-3	18'	8' / 6'	13'	8.5	40.5
D6220-3	23'	10' / 8'	17'	11.1	54.0
D6224-3	27'	12' / 9'	21'	12.4	61.0
D6228-3	31'	14' / 11'	26'	15.0	74.5
D6232-3	35'	16' / 12'	29'	13.7	81.0

* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.

DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		



Exclusive Alflo® rung joint means Twist-Proof® performance

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Shipping Wt. Lbs.
D6216-2GHV	16'	13'	32.0
D6220-2GHV	20'	17'	40.0
D6224-2GHV	24'	21'	46.0
D6228-2GHV	28'	25'	53.0

DIMENSIONS

Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16" to 28"	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails, 19" outside rails, 22-3/4" outside shoes

FIBERGLASSEXTENSION LADDERS

FOR WORKING AROUND ELECTRICITY. NON-CONDUCTIVE SIDE RAILS.





D6000-2SERIES


★★★ 250lbs. LOAD CAPACITY

TYPE I
DUTY RATING

STYLE: D-Run Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

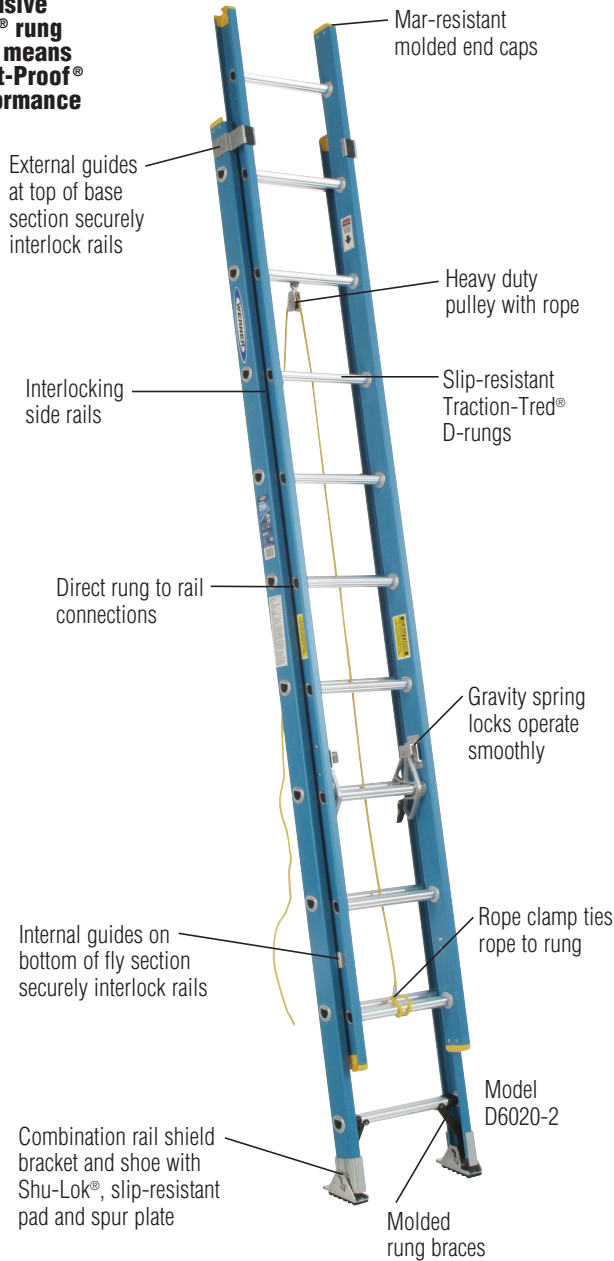

®The blue and yellow ladder is an exclusive registered trademark of Werner Co.

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6016-2‡	16'	13'	7.0	32.5
D6020-2	20'	17'	8.7	39.0
D6024-2	24'	21'	10.3	46.0
D6028-2	28'	25'	12.0	55.5

‡ Note: D6016-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3-3/8" wide	Fly Width:	15-3/4" outside rails
Flange:	1-3/16" wide	Base Width:	18-1/8" outside shoes
Rungs:	1-1/2"		

D5900-2SERIES


★★ 225lbs. LOAD CAPACITY

TYPE II
DUTY RATING

STYLE: D-Run Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

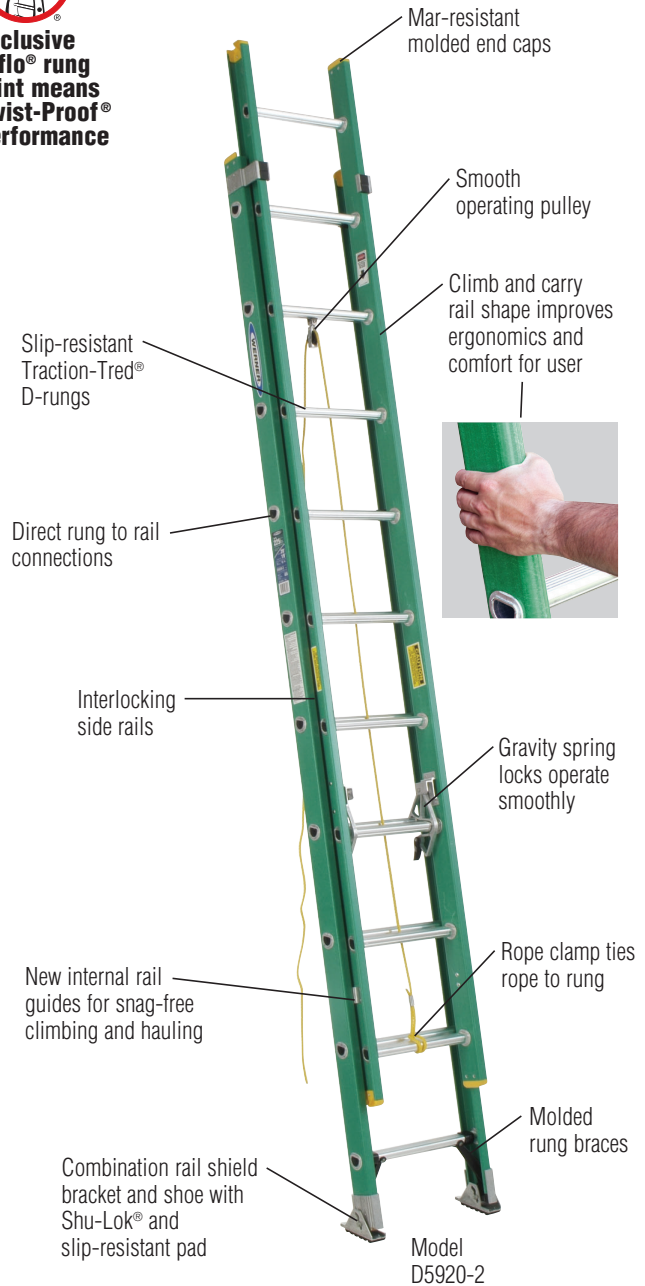

SPECIFICATIONS


















Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D5916-2‡	16'	13'	5.9	27.0
D5920-2	20'	17'	7.4	33.0
D5924-2	24'	21'	8.9	39.0

‡ Note: D5916-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	15-1/8" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside shoes
Rungs:	1-1/2"		

FIBERGLASS EXTENSION LADDER COMPARISON CHART

Features and Benefits	D7200-2 SERIES	D7100-2LV SERIES	D7100-2 SERIES	7100 SERIES	D8200-2EQ SERIES	D6400-2 SERIES	D6200 SERIES	D6000-2 SERIES	D5900-2 SERIES
	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE II
 Guides at top of base section	★	★	★	★	★	★	★	★	
 Guides on bottom of fly section	★	★	★	★	★	★	★	★	★
 Pulley and rope systems	★	★	★	★	★	★	★	★	★
 Rail shield and shoe bracket protects rail	★	★	★	★	★	★	★	★	
 Shoe with slip-resistant pad and spur plate	★	★	★	★	★	★	★	★	★
 Rugged gravity spring locks	★	★	★	★	★	★	★	★	★
 Rope clamp ties rope to rung	★	★	★	★	★	★	★	★	★
 Alflo® rung joint for Twist-Proof® performance	★	★	★	★	★	★	★	★	★
Electrically non-conductive side rails	★	★	★	★	★	★	★	★	★
 Mar-resistant molded end caps	★	★	★	★	★	★	★	★	★
Base section may be used as a single ladder	★	★	★	★	★	★	★	★	★
 Pre-pierced holes for easy field installation of accessories	★	★	★	★	★	★	★		
 Plate and rung assembly to allow for rung replacement	★	★	★	★					
 Direct rung to rail connections					★	★	★	★	★
 Interlocking side rails	★	★	★	★	★	★	★	★	★
 Slip-resistant D-rungs	★	★	★		★	★	★	★	★
 Slip-resistant round rungs				★					
 Molded rung braces						★	★	★	★
 Integrated leveling		★			★				






7800 SERIES

★★★★★ **375 lbs.** LOAD CAPACITY TYPE IAA DUTY RATING

STYLE: Combination Step/Extension Ladder††

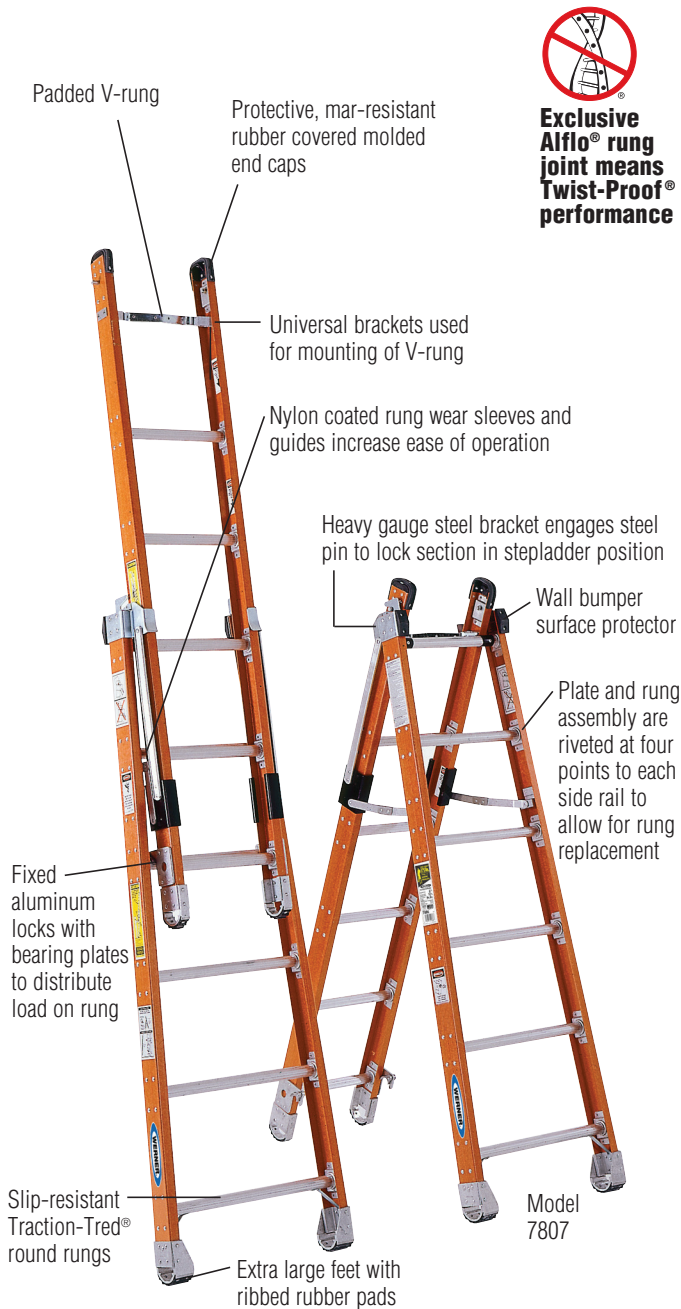

SPECIFICATIONS

Model No.	Stepladder Size	Width at Flared Base (outside rails)	Stepladder Spread to Outside of Shoes	Length of Ladder in Closed Position	Extended Ladder Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7806	6'	23-1/4"	46-1/2"	72-3/4"	9-1/2'	8.6	33.5
7807	7'	24-1/4"	53-1/2"	84-3/4"	11-1/2'	10.3	37.0
7808	8'	25-1/4"	60-1/2"	96-3/4"	13-1/2'	12.1	40.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

	Parallel Section	Flared Section
Overlap	3'	--
Rails:	3-1/8" wide	3-1/8" wide
Flange:	1-3/16" wide	1-3/16" wide
Ladder Width:	14-1/2" outside rails	14-1/2" outside rails at top
Ladder in Closed Position:	—	7-7/8" deep

M7100-1 SERIES

★★★★★ **375 lbs.** LOAD CAPACITY TYPE IAA DUTY RATING

STYLE: Manhole Ladder



SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M7108-1	8'	3.0	20.0
M7110-1	10'	3.7	24.0
M7112-1	12'	4.4	28.0
M7114-1	14'	5.2	32.0
M7116-1	16'	5.9	39.5

DIMENSIONS

Rails:	3-5/16" wide	Rungs:	1-1/4"
Flange:	1-3/16" wide	Ladder Width:	12-3/8" outside shoes

S7900SERIES

★★★★★ **375lbs.** LOAD CAPACITY
3 SECTIONS


★★★★★ **300lbs.** LOAD CAPACITY
4 SECTIONS TYPE IA DUTY RATING

STYLE: Interchangeable Tapered Sectional Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

- Maximum number of sections to be used – 4

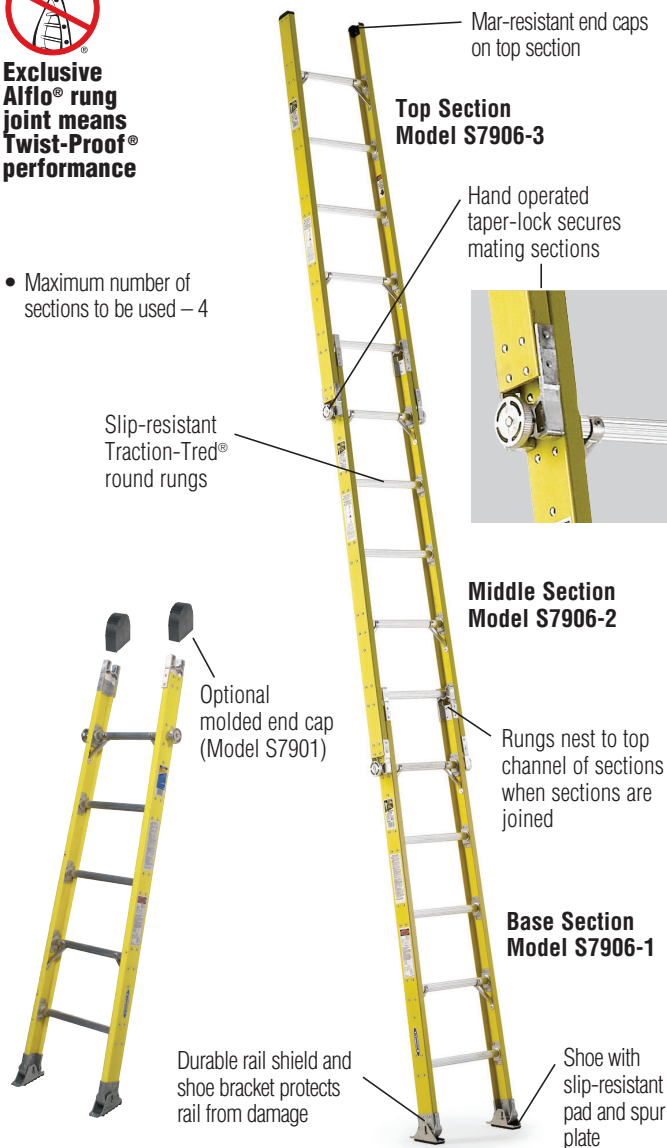

SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7906-1	6' tapered base with swivel shoes	15-3/4"	19-3/4"	2.3	17.0
S7906-2	6' intermediate	15-3/4"	18-3/4"	3.5	15.5
S7906-3	6' top with molded end cap	16-3/16"	18-3/4"	3.4	13.0
S7901 (Accessory)	End cap for middle or base sections	N/A	N/A	0.1	1.0 ea.

ASSEMBLY DESCRIPTION

Quantity of Sections	Model No.	Total Assembled Size
1	S7906-1 base	6' 2"
1	S7906-1 base	
1	S7906-2 middle	15' 11"
1	S7906-3 top	
1	S7906-1 base	20' 11"
2	S7906-2 middle	
1	S7906-3 top	


DIMENSIONS

Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter

9500-2/9500-1SERIES

★★★★★ **300lbs.** LOAD CAPACITY
TYPE IA DUTY RATING

STYLE: All-Fiberglass Extension/Straight Ladder

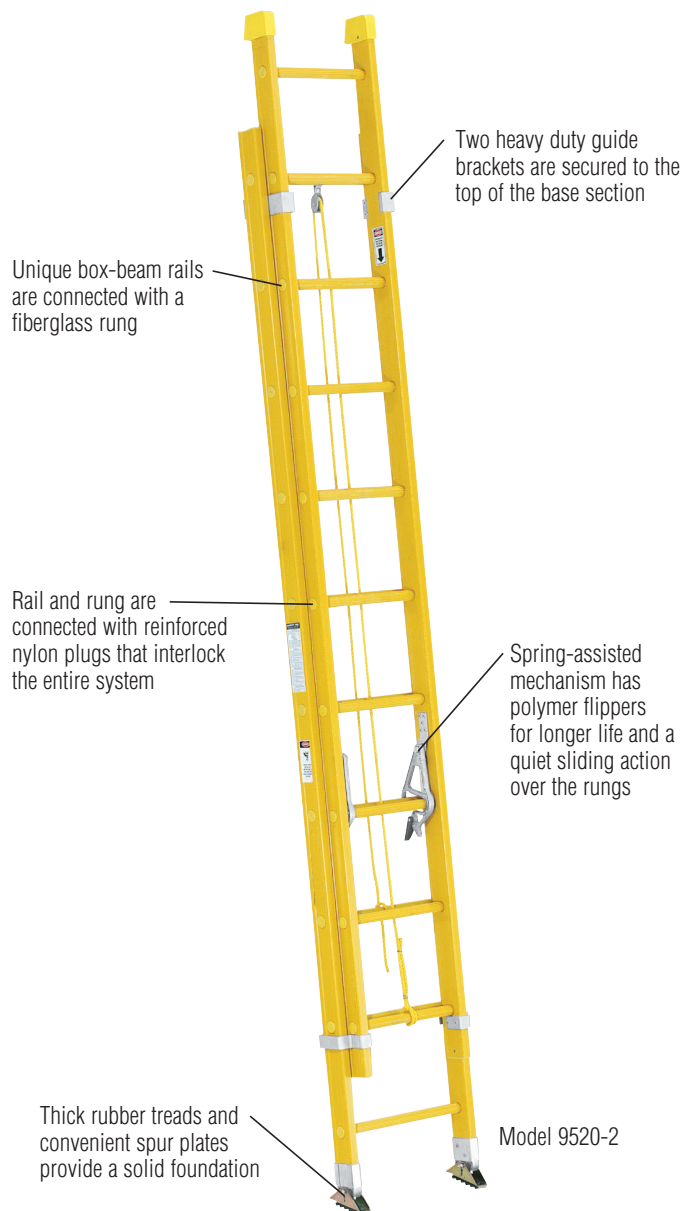

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
9516-2	16'	13'	8.3	41.0	9508-1	8'	5.5	18.0
9520-2	20'	17'	10.2	49.0	9510-1	10'	6.8	22.0
9524-2	24'	21'	12.2	56.0	9512-1	12'	8.0	26.0
9528-2	28'	25'	14.1	64.0	9514-1	14'	9.4	30.0
9532-2	32'	29'	16.0	72.0	9516-1	16'	10.7	34.0
					9518-1	18'	11.2	38.0
					9520-1	20'	12.5	42.0

DIMENSIONS

Rails:	3-1/4" wide	Fly Width:	15-1/2" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-1/4"		






SPF00-1/TPF00-1 SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Posting Ladder

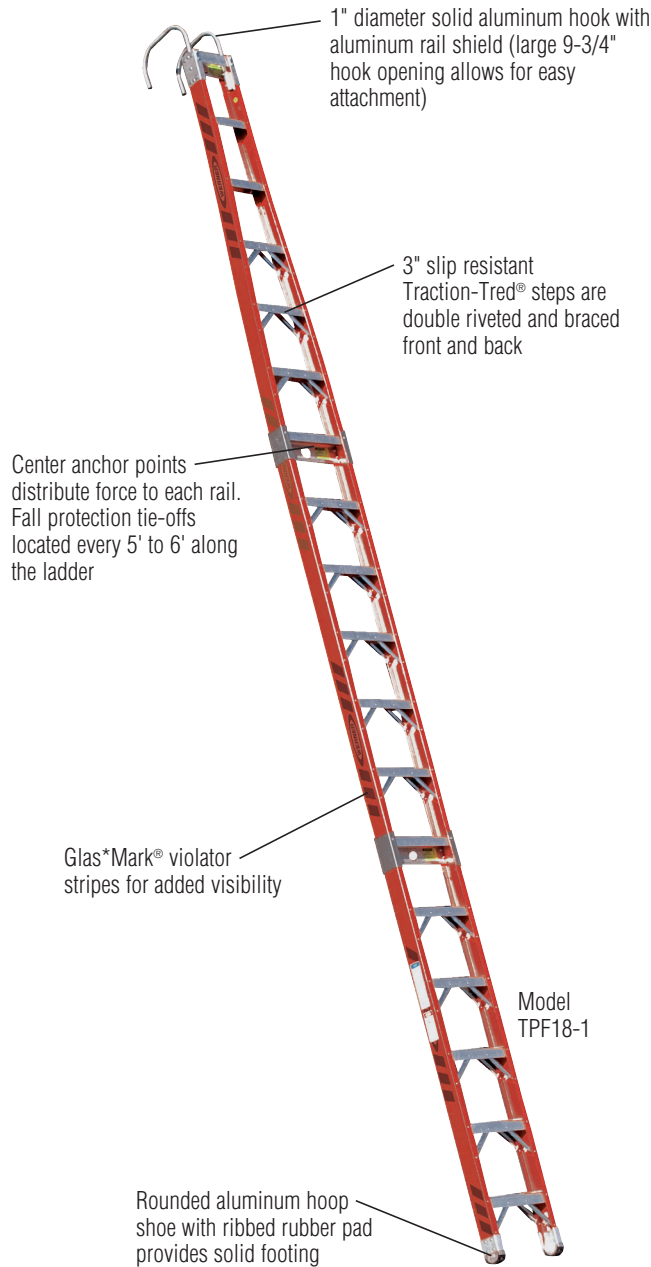

SPECIFICATIONS

Model No.	Total Length	Length for Shipping	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
Straight Posting Ladders (not shown above)				
SPF14-1	14'	15'	6.0	38.0
SPF16-1	16'	17'	6.8	43.0
SPF18-1	18'	19'	7.6	49.0
SPF20-1	20'	21'	8.4	58.0
Tapered Posting Ladders				
TPF14-1	14'	15'	6.0	37.0
TPF16-1	16'	17'	6.8	42.0
TPF18-1	18'	19'	7.6	48.0
TPF20-1	20'	21'	8.4	57.0

DIMENSIONS

Rails:	3-5/16" wide	Steps:	2-7/8" wide
Flange:	1-3/16" wide	Base Width:	14-5/8"

S7700 SERIES

★★★ **250lbs.** LOAD CAPACITY **TYPE I** DUTY RATING

STYLE: Interchangeable Parallel Sectional Ladder





Exclusive Alflo® rung joint means Twist-Proof® performance

- Maximum number of sections to be used – 3

Slip-resistant Traction-Tred® round rungs

Sections joined by heavy duty extruded fittings and secured by a cam driven tension clamp

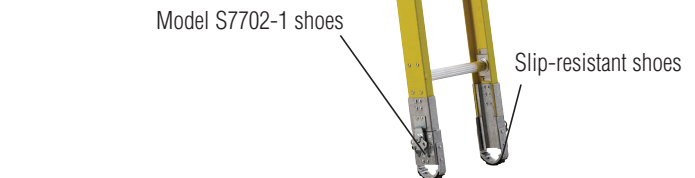

SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7706-1	For manhole use - 6' length	12" wide	12" wide	2.1	15.5
End Caps and Shoes					
S7701	End cap (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-1	Shoe with black EPDM pad (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-2	Shoe with gray EPDM pad (2 required) Buna N Pad - Oil resistant	N/A	N/A	0.1	1.5 ea.

ASSEMBLY DESCRIPTION

Max. No. of Sections	Approx. Max. Assembled Length
(3) assembled 6' sections with (1) pair of end caps and (1) pair of shoes	19'

DIMENSIONS

Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter

400SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Stepladder



Model 406

- Optional black molded pail shelf kit, model no. PK76-3

SPECIFICATIONS

NOTE: Type IAA duty rating is for stepladders up to 12 ft.

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
404	4'	21-1/4"	30-1/8"	4.8	16.0
406	6'	24-3/4"	42-7/16"	8.1	24.0
408	8'	28-1/4"	54-3/4"	12.2	33.5
410	10'	31-3/4"	67"	17.0	43.5
412	12'	35-1/4"	79-3/8"	22.5	54.5

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

414	14'	38-5/8"	91-11/16"	28.2	65.0
416	16'	42-1/8"	104"	34.7	77.5

DIMENSIONS

Top:	7" x 14"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

T400SERIES

★★★★★ **375lbs.** LOAD CAPACITY **PER SIDE** **TYPE IAA** DUTY RATING

STYLE: Multi-Use Twin Stepladder††



Model T406

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T404	4'	21-1/4"	36-1/4"	5.0	21.5
T406	6'	24-3/4"	50-1/4"	8.8	31.0
T408	8'	28-1/4"	64-1/4"	13.3	42.0
T410	10'	31-3/4"	78-1/4"	18.7	55.0
T412	12'	35-1/4"	92-1/4"	25.0	69.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide





P400SERIES

★★★★★ **375** lbs. LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Platform Ladder



Model P404

- Internal spreaders on 8' and above

SPECIFICATIONS NOTE: Type IAA duty rating is for platforms ranging in size from 4' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P404	4'	6'	24-3/4"	42-1/16"	7.1	25.0
P406	6'	8'	28-1/4"	54-3/4"	10.1	33.5
P408	8'	10'	31-3/4"	79-1/2"	20.3	45.5

★★★★★ **300** lbs. LOAD CAPACITY **TYPE IA** DUTY RATING

P410	10'	12'	35-1/4"	79-3/8"	20.3	54.5
P412	12'	14'	38-3/4"	91-11/16"	25.2	66.0
P414	14'	16'	42-1/4"	104"	31.1	79.5


DIMENSIONS

Platform:	12-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

370SERIES

★★★★★ **300** lbs. LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Stepladder

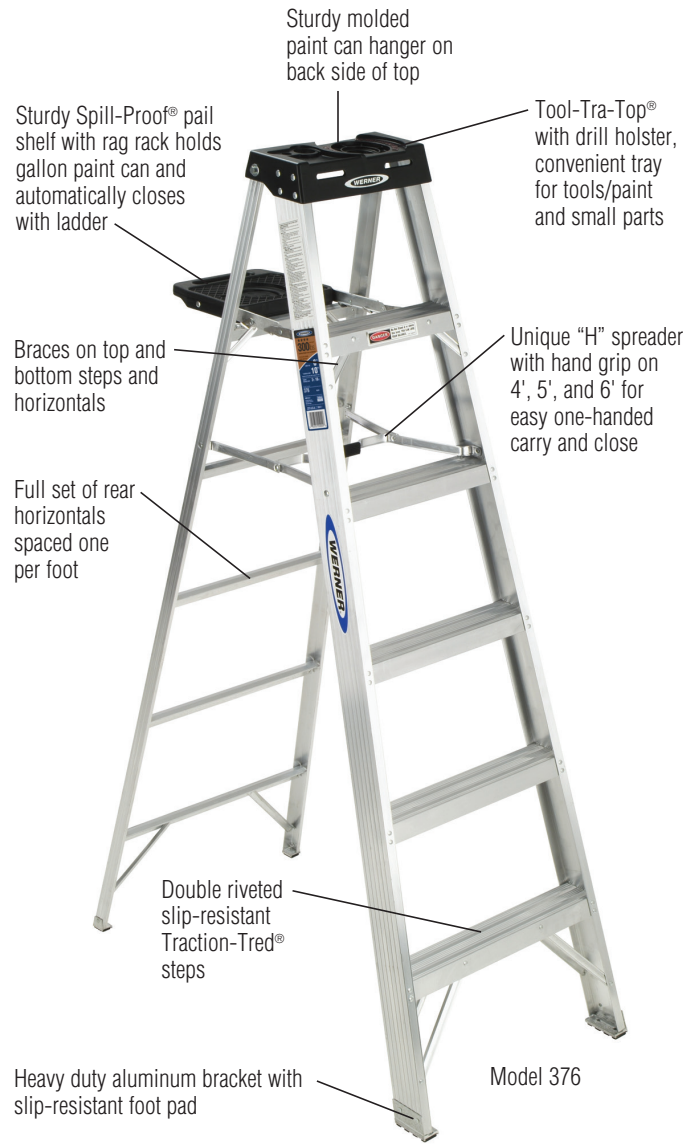

Model 376

- External Pinch-Proof™ spreaders on 3', 7', 8' and 10' models

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
373	3'	17-3/4"	23-3/8"	1.5	9.0
374	4'	19-1/2"	29-1/2"	2.1	11.0
375	5'	21-1/4"	35-3/4"	2.8	13.5
376	6'	23"	41-7/8"	3.5	15.5
378	8'	26-1/2"	54-1/4"	5.1	22.5
310	10'	30"	66-1/2"	7.0	31.0


DIMENSIONS

Top:	5-1/8" x 12-1/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide

T370SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Multi-Use Twin Stepladder††

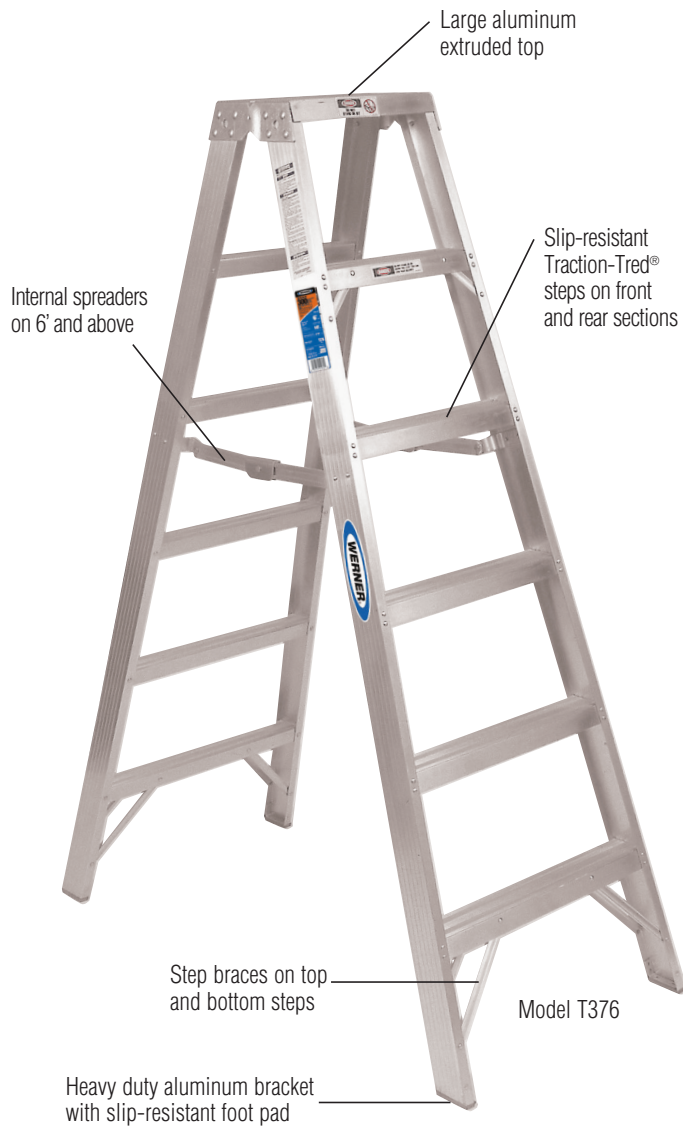

- External Pinch-Proof™ spreaders on 4' model

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T374	4'	21-1/4"	36"	3.5	14.5
T376	6'	24-3/4"	50"	5.7	21.5
T378	8'	28-1/4"	64"	8.2	31.0
T310	10'	31-3/4"	78"	11.1	43.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


DIMENSIONS

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

P370SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
DUTY RATING

STYLE: Platform Ladder

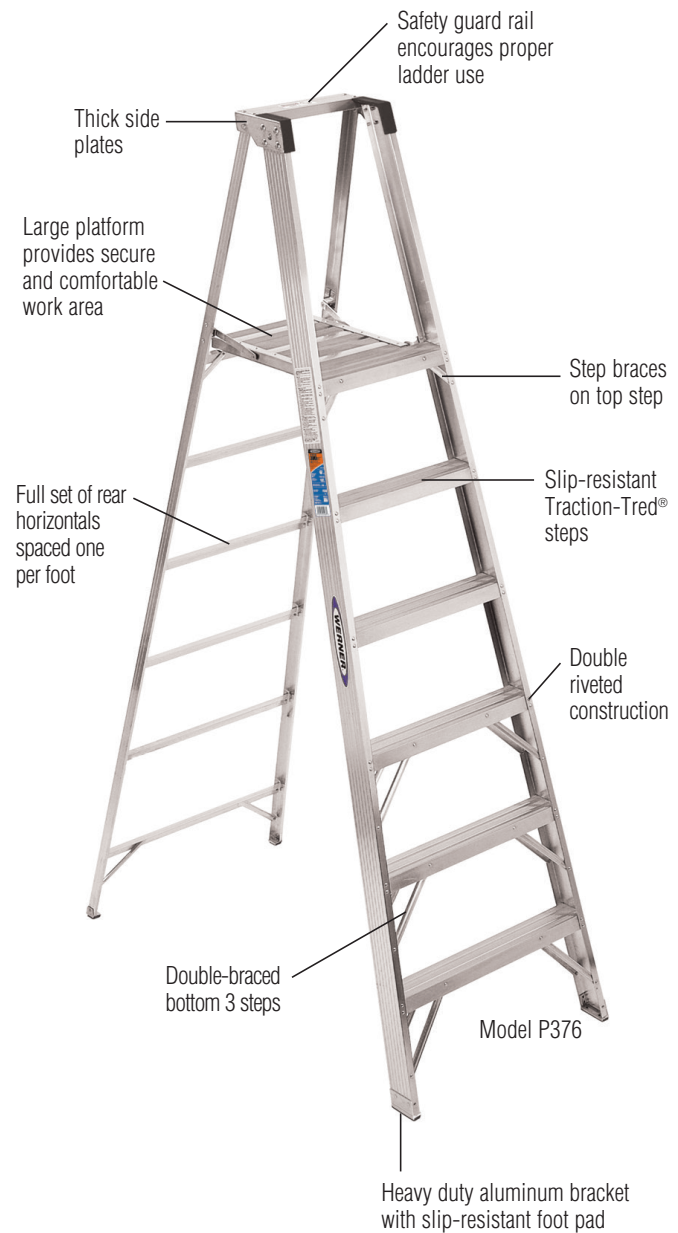

- External Pinch-Proof™ spreaders on 8' model

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P372	2'	4'	21-1/4"	30"	3.0	12.0
P373	3'	5'	23"	36-1/4"	3.9	14.5
P374	4'	6'	24-3/4"	42-3/4"	4.9	17.0
P376	6'	8'	28-1/4"	54-3/4"	7.1	23.0
P378	8'	10'	31-3/4"	67"	8.4	32.0

DIMENSIONS

Platform:	12-5/8" x 18"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide





PT370SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Stockr's Ladder®††



- Available with 4 casters to allow for easy 360° mobility
- Easy to handle and folds to a 10" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT372	2'	4'	21-1/4"	36"	5.1	21.0	PT372-4C	27.5
PT374	4'	6'	24-3/4"	50-1/2"	8.9	27.0	PT374-4C	33.5
PT376	6'	8'	28-1/4"	65-1/4"	13.5	36.0	PT376-4C	42.5
PT378	8'	10'	31-3/4"	81-1/2"	19.0	46.5	PT378-4C	54.0
PT310	10'	12'	34-1/4"	96"	24.5	58.5	PT310-4C	66.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3" wide	Flange:	3/4" wide

SH378MODEL

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
DUTY RATING

STYLE: Shelf Ladder

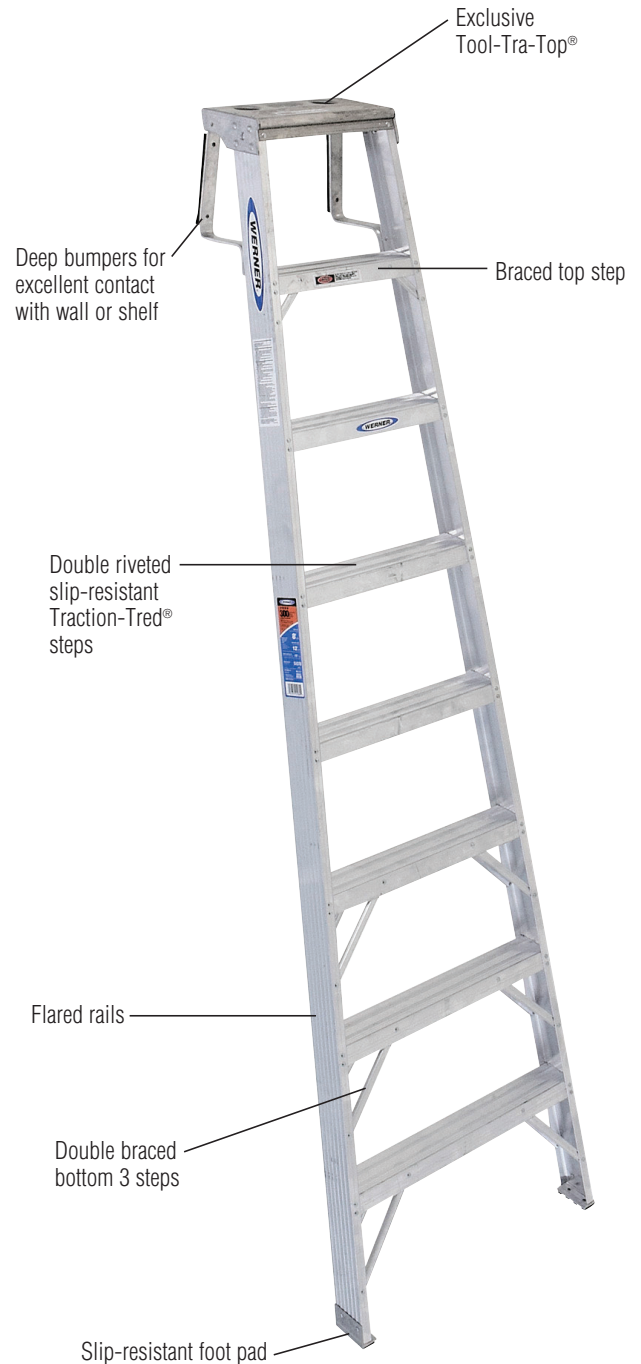

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SH378	8'	28-1/4"	3.9	15.5

DIMENSIONS

Top:	7" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide



SSA00SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING

STYLE: Step Stand



SPECIFICATIONS

Model No.	Size	Max. Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSA02	2'	20"	17"	21"	2.6	16.0
SSA03	3'	30"	18-3/4"	27-1/2"	4.0	21.0

DIMENSIONS

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

TW370-30SERIES

★★★★★ **300lbs.** LOAD CAPACITY **PER SIDE** **TYPE IA** DUTY RATING

STYLE: Portable Work Stand††



- Extra wide for versatile use as work stand, stage or material support
- Lightweight and portable

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW372-30	2'	33"	22"	4.0	12.5
TW373-30	3'	34-3/4"	29"	5.6	17.5
TW374-30	4'	36-1/2"	36"	7.8	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Top:	8" x 30"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

150BMODEL

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: Step Stool



SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
150B	2'	17"	19"	1.9	5.5


DIMENSIONS

Top:	6" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

T372MODEL

★★★★★ **300lbs.** LOAD CAPACITY **PER SIDE** **TYPE IA** DUTY RATING

STYLE: Twin Step Stool††

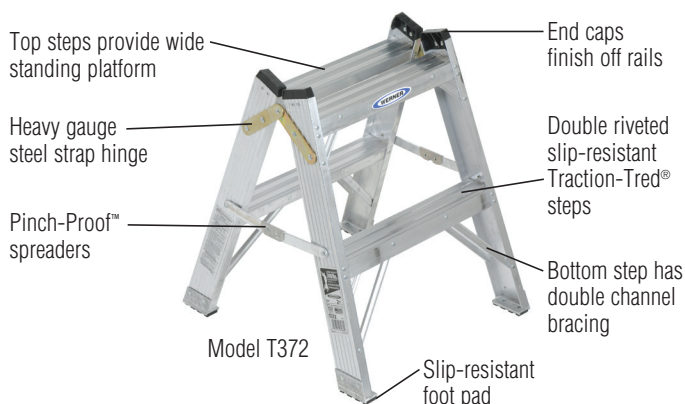

- Folds to 7-1/4" width for easy storage

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T372	2'	21-1/4"	23-3/8"	2.3	9.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Rails:	3" wide	Flange:	7/8" wide
Steps:	3" wide		



360 SERIES

★★★ 250 lbs. LOAD CAPACITY

TYPE I DUTY RATING

STYLE: Stepladder



Model 366

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
363	3'	17"	23-1/4"	1.7	8.0
364	4'	18-1/2"	29-1/4"	2.4	10.5
365	5'	20"	35-1/2"	3.1	12.5
366	6'	21-1/2"	41-5/8"	3.9	14.5
368	8'	24-1/2"	54"	5.7	21.5

DIMENSIONS

Top:	5" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

350 SERIES

★★ 225 lbs. LOAD CAPACITY

TYPE II DUTY RATING

STYLE: Stepladder



Model 356

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
354	4'	18-1/2"	29-1/4"	2.4	10.0
355	5'	20"	35-1/2"	3.1	12.0
356	6'	21-1/2"	41-5/8"	3.9	13.5

DIMENSIONS


Top:	4-5/8" x 12-1/2"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

260SERIES

★ **200lbs.** LOAD CAPACITY

TYPE III
DUTY RATING

STYLE: Platform Ladder

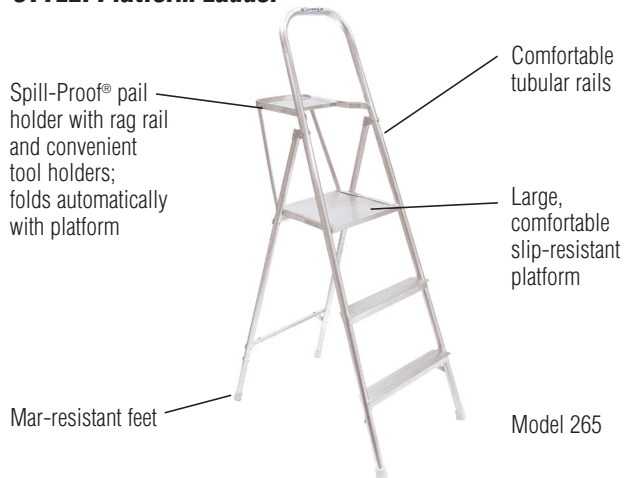

Model 265

- Compact for convenient storage – folds to 3-1/2"

SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
264	22-1/2"	4-1/2"	20"	25-1/2"	2.0	11.5
265	33-1/2"	5-1/2"	21-1/2"	33-1/4"	2.6	15.0

DIMENSIONS

Platform:	14-1/2" x 12"	Steps:	3" wide
Front Tubular Rails:	1-1/8" diameter	Rear Tubular Rails:	1" diameter

244MODEL

★ **200lbs.** LOAD CAPACITY

TYPE III
DUTY RATING

STYLE: Utility Ladder



- Lightweight – easy action open-close
- Compact for convenient storage – folds to 3"

SPECIFICATIONS

Model No.	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
244	3-1/2"	18-1/2"	22-1/2"	1.4	9.0

DIMENSIONS

Front Tubular Rails:	1-1/8" diameter	Steps:	6" wide
Rear Tubular Rails:	1" diameter	Height to 2nd Step:	23"





ALUMINUM STEPLADDER COMPARISON CHART

Features and Benefits	400 SERIES	T400 SERIES	P400 SERIES	370 SERIES	T370 SERIES	P370 SERIES	PT370 SERIES	360 SERIES	350 SERIES
	TYPE IAA/IA	TYPE IAA	TYPE IAA/IA	TYPE IA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE II
Slip-resistant foot pad	★	★	★	★	★	★	★	★	★
Slip-resistant Traction-Tred® steps	★	★	★	★	★	★	★	★	★
Dual drill HolsterTop®	★								
External spreaders	4', 5', 8' models	4', 6' models		3', 8', 10' models				★	★
Designed for one or two person jobs		★			★		★		
Knee-braced top & bottom steps	★	★	★	★	★	★	★	★	★
Aluminum top	★	★	★		★	★			
Full set of rear horizontals	★		★	★		★			
Spill-Proof® pail shelf with rag rack				★				★	★
Tool-Tra-Top®	★			★				★	★
Safety guard rail			★			★	★		
Platform for comfortable work area			★			★	★		
Paint can hanger on top				★				★	★
H-spreader for one-handed carry & close				★					

500-1 SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA**
DUTY RATING

STYLE: Round Rung Straight Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance



Model 508-1

SPECIFICATIONS

NOTE: Type IAA duty rating is for single ladders up to 16 ft.

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
508-1	8'	2.9	16.5
510-1	10'	3.6	20.0
512-1	12'	4.3	24.0
514-1	14'	5.0	27.5
516-1	16'	5.7	37.0

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
DUTY RATING

518-1	18'	6.4	41.0
520-1	20'	7.1	45.5
524-1	24'	14.0	60.5

DIMENSIONS

	Rails:	Flange:	Round Rungs:	Base Width:
8' to 14'	3" wide	1-3/16"	1-1/4"	16-7/8"
16' to 20'	3" wide	1-1/4"	1-1/4"	16-7/8"
24'	4" wide	1-3/8"	1-1/4"	20-5/8"


D500-2 SERIES

★★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA**
DUTY RATING

STYLE: D-Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

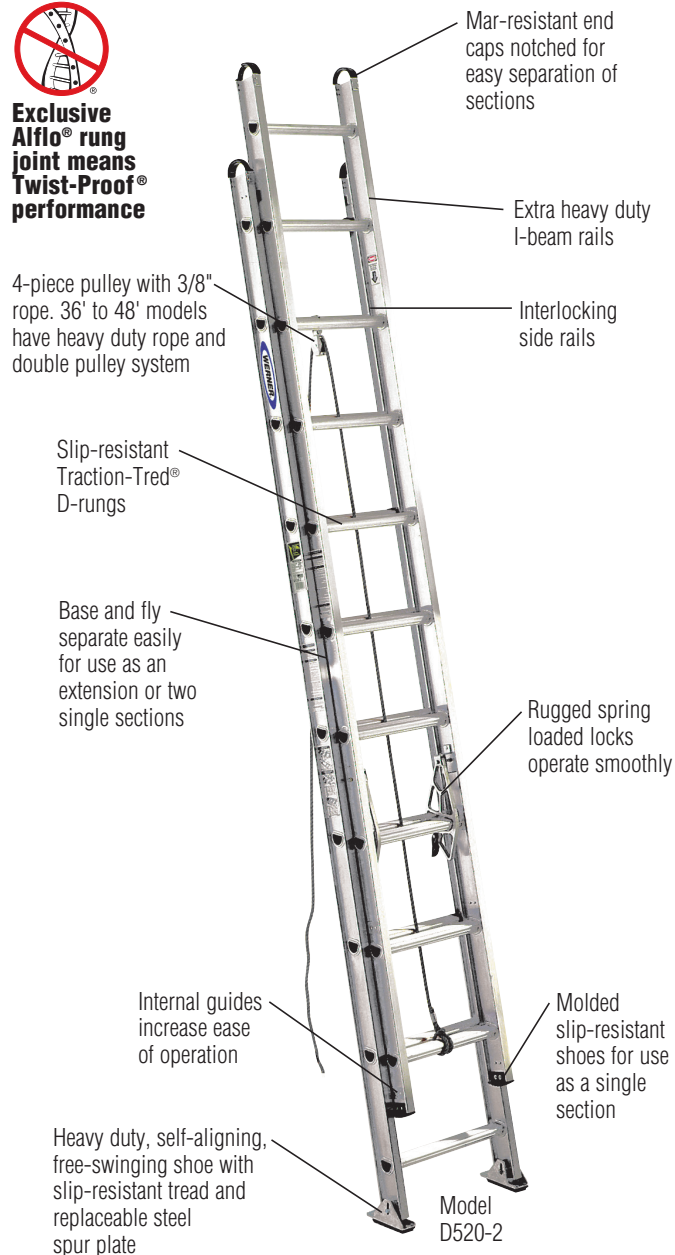

Mar-resistant end caps notched for easy separation of sections

Extra heavy duty I-beam rails

Interlocking side rails

4-piece pulley with 3/8" rope. 36' to 48' models have heavy duty rope and double pulley system

Slip-resistant Traction-Tred® D-rungs

Base and fly separate easily for use as an extension or two single sections

Rugged spring loaded locks operate smoothly

Internal guides increase ease of operation

Molded slip-resistant shoes for use as a single section

Heavy duty, self-aligning, free-swinging shoe with slip-resistant tread and replaceable steel spur plate

Model D520-2

SPECIFICATIONS

NOTE: Type IAA duty rating is for extension ladders up to 32 ft.

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D520-2	20'	17'	8.8	42.0
D524-2	24'	21'	10.4	49.0
D528-2	28'	25'	12.1	65.5
D532-2	32'	29'	13.8	74.0

★★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
DUTY RATING

D536-2	36'	32'	15.4	90.0
D540-2	40'	35'	17.0	99.5
D544-2	44'	39'	21.4	131.0
D548-2	48'	43'	23.3	142.5

DIMENSIONS

Rails:	3-1/4" wide	Rungs:	1-3/4"
Flange:	1-3/16" wide (20' & 24') 1-1/4" wide (28' to 48')	Base Section Width:	19-1/8" outside shoes 20-1/8" (44' & 48')






D1500-2/D1500-1 SERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA** DUTY RATING

STYLE: D-Rung Extension/Straight Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

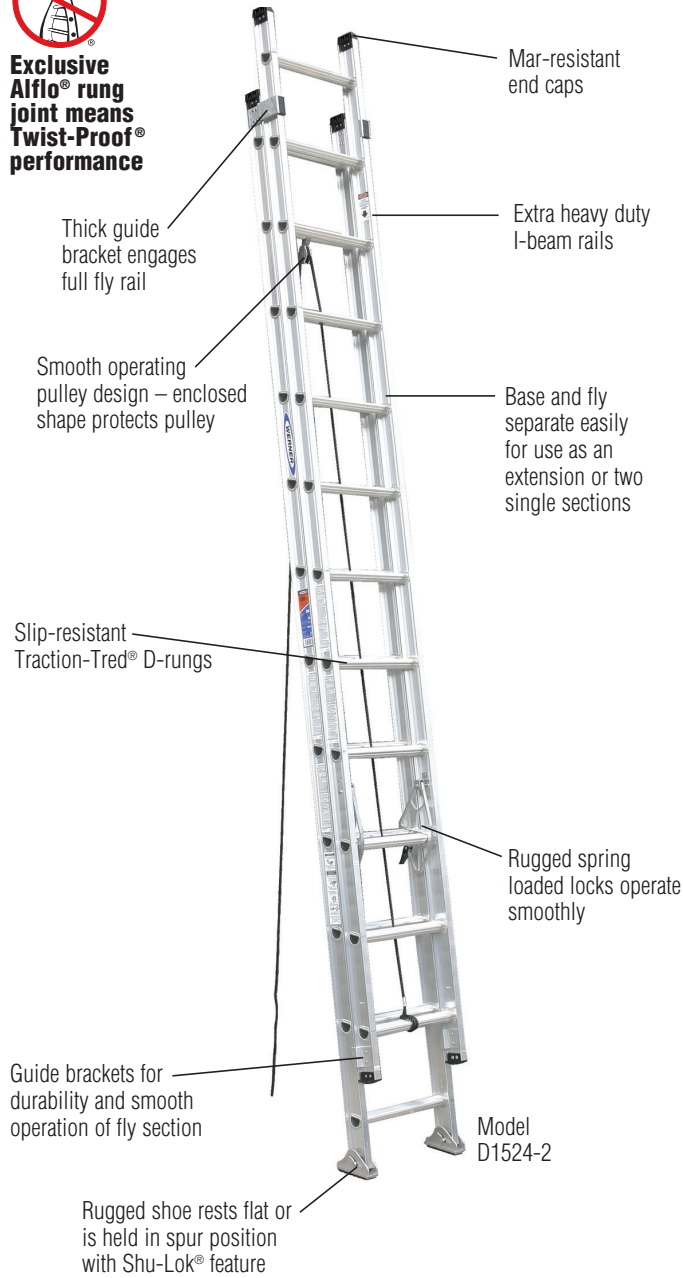

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1516-2†	16'	13'	6.2	30.5	D1508-1	8'	3.6	14.5
D1520-2	20'	17'	7.7	37.0	D1510-1	10'	4.5	17.5
D1524-2	24'	21'	9.2	45.0	D1512-1	12'	5.4	21.5
D1528-2	28'	25'	10.7	56.0	D1514-1	14'	6.2	27.0
D1532-2	32'	29'	12.2	67.0	D1516-1	16'	7.1	32.5
D1536-2	36'	32'	13.7	80.0	D1518-1	18'	8.0	38.5
D1540-2	40'	35'	15.2	89.5	D1520-1	20'	8.9	43.5

† Note: D1516-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/8" wide	Base Width:	18-1/8" outside rails


560-3 MODEL

★★★ **250lbs.** LOAD CAPACITY **TYPE I** DUTY RATING

STYLE: Round Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

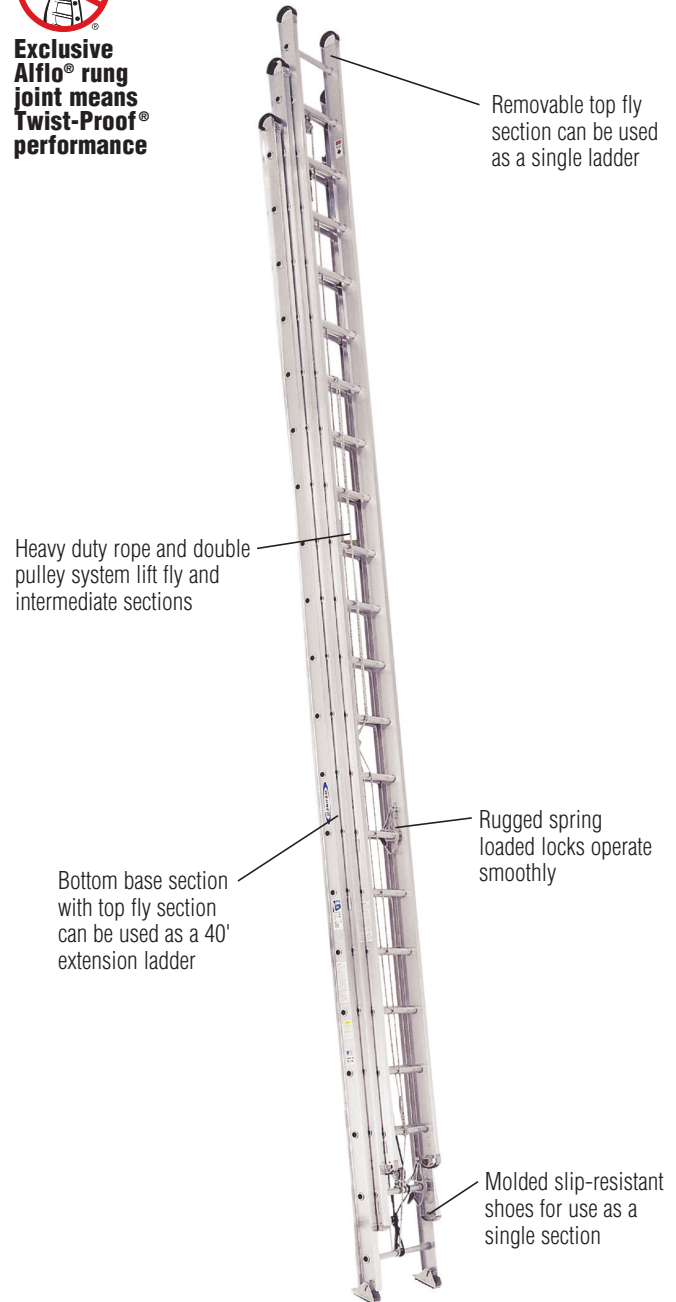

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
560-3	60'	47'	26.8	179.0

DIMENSIONS

Rails:	4" wide	Rungs:	1-1/4"
Flange:	2" wide (base & intermediate sections) 1-3/8" wide (top fly section)	Base Width:	23-1/2"

D1800-2EQ/D1700-2EQ SERIES

★★★ **250lbs.** LOAD CAPACITY TYPE I DUTY RATING

STYLE: Extension Ladder with Integrated Leveling



Exclusive Alflo® rung joint means Twist-Proof® performance


Lightweight aluminum

Slip-resistant Traction-Tred® D-rungs

Heavy duty spring-loaded locks operate smoothly

Model D1820-2EQ

THE Equalizer®
ELIMINATES UNEVEN GROUND



Factory installed adjustable EverLevel® leveling system exceeds OSHA and ANSI requirements

Easily adjustable in 3/8" increments up to 8-1/4"



Convenient built-in bubble level



Dual action foot for use on hard or penetrable surfaces

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1816-2EQ‡	16'	13'	6.5	31.5
D1820-2EQ	20'	17'	8.1	37.5
D1824-2EQ	24'	21'	9.6	45.5
D1828-2EQ	28'	25'	11.2	56.0

★★ **225lbs.** LOAD CAPACITY TYPE II DUTY RATING

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1716-2EQ‡	16'	13'	6.5	27.5
D1720-2EQ	20'	17'	8.1	32.5
D1724-2EQ	24'	21'	9.6	39.0
D1728-2EQ	28'	25'	11.2	48.5

‡ Note: D1816-2EQ and D1716EQ are not equipped with rope and pulley

DIMENSIONS

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)

D1300-2SERIES

★★★ **250lbs.** LOAD CAPACITY TYPE I DUTY RATING

STYLE: D-Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

Smooth operating pulley

Slip-resistant Traction-Tred® D-rungs

Durable shoe rests flat or is held in spur position with Shu-Lok® feature

Mar-resistant end caps

Interlocking side rails

Heavy duty modified I-beam side rails

Heavy duty spring loaded locks operate smoothly

Model D1320-2

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1316-2‡	16'	13'	5.8	26.0
D1320-2	20'	17'	7.2	32.5
D1324-2	24'	21'	8.6	40.0
D1328-2	28'	25'	10.0	50.5
D1332-2	32'	29'	11.5	63.5
D1336-2	36'	32'	13.0	77.5
D1340-2	40'	35'	14.4	85.5

‡ Note: D1316-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails





D1200-2SERIES


★★ 225/lbs. LOAD CAPACITY

TYPE II DUTY RATING

STYLE: D-Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

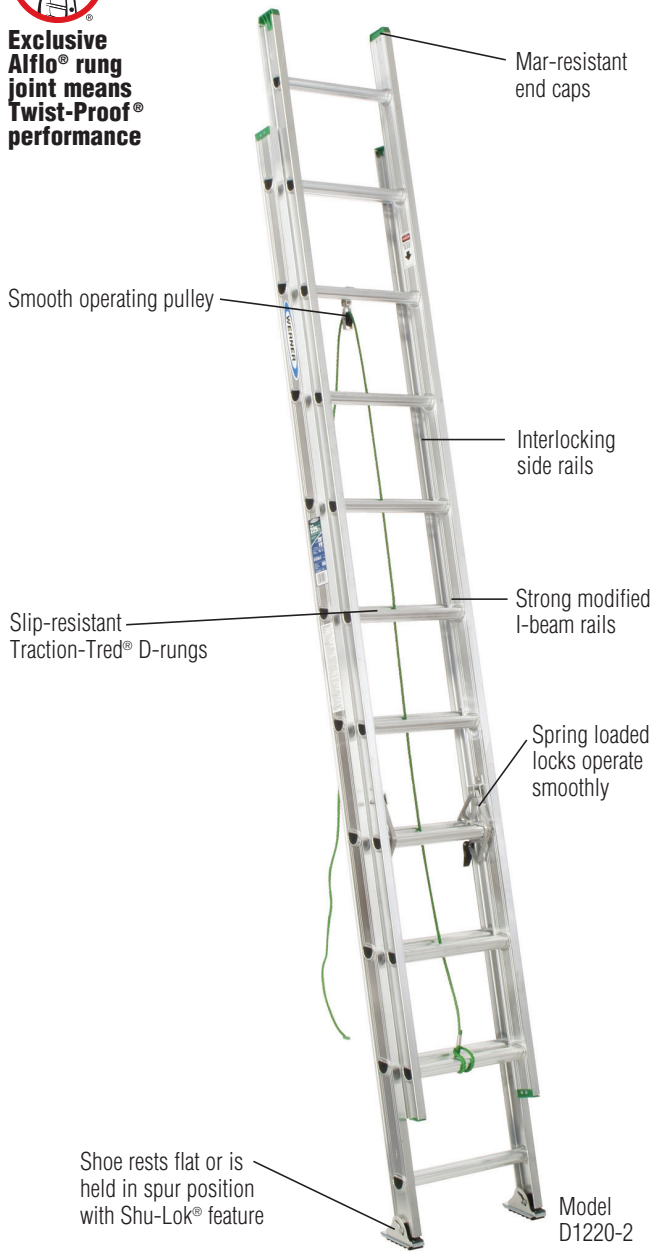

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-2‡	16'	13'	5.8	22.0
D1220-2	20'	17'	7.2	27.0
D1224-2	24'	21'	8.6	33.5
D1228-2	28'	25'	10.0	43.0
D1232-2	32'	29'	11.5	54.0
D1236-2	36'	32'	13.0	62.5
D1240-2	40'	35'	14.4	73.5

‡ Note: D1216-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1" wide	Base Width:	17-3/8" outside rails

D1200-3SERIES


★★ 225/lbs. LOAD CAPACITY

TYPE II DUTY RATING

STYLE: D-Rung Compact Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

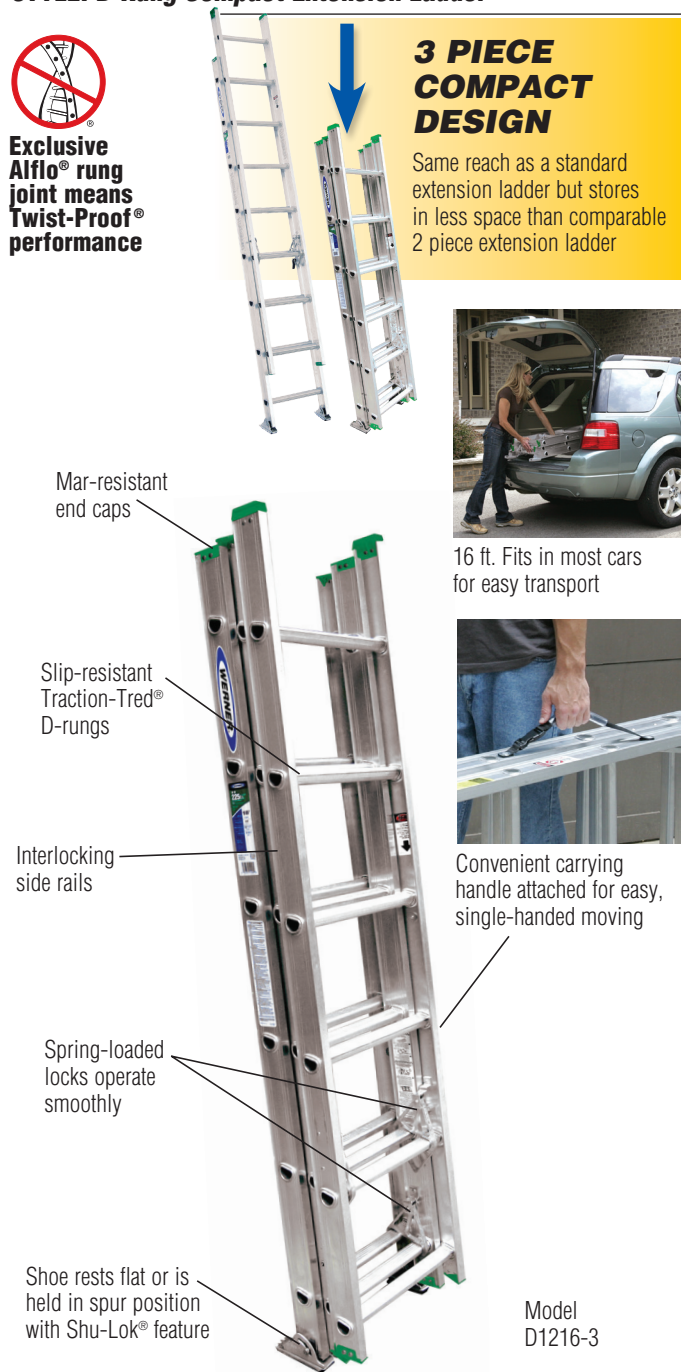

SPECIFICATIONS

Model No.	Total Length of Sections	Total Length in Storage Position 2 vs. 3 piece*	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-3	18'	8' / 6'	13'	5.9	26.5
D1224-3	27'	12' / 9'	21'	8.7	38.5

* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.

DIMENSIONS

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)

D1100-2SERIES


★ **200lbs.** LOAD CAPACITY

TYPE III
DUTY RATING

STYLE: D-Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

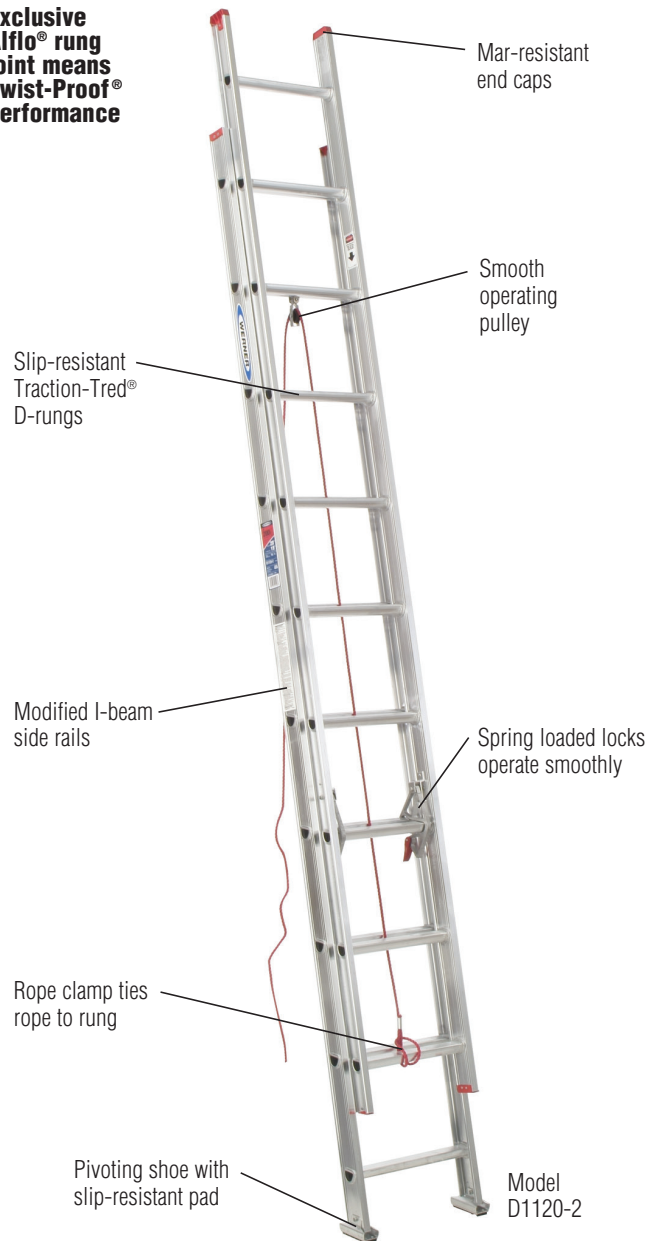

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1116-2‡	16'	13'	4.9	18.5
D1120-2	20'	17'	6.2	23.0
D1124-2	24'	21'	7.4	30.0
D1128-2	28'	25'	9.0	38.5

‡ Note: D1116-2 is not equipped with rope and pulley

DIMENSIONS

Rails:	2-3/4" wide (16' & 20') 3" wide (24' & 28')	Rungs:	1-1/2"
Flange:	15/16" wide	Base Width:	16" outside rails

D716-2MODEL


★ **200lbs.** LOAD CAPACITY

TYPE III
DUTY RATING

STYLE: D-Rung Extension Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

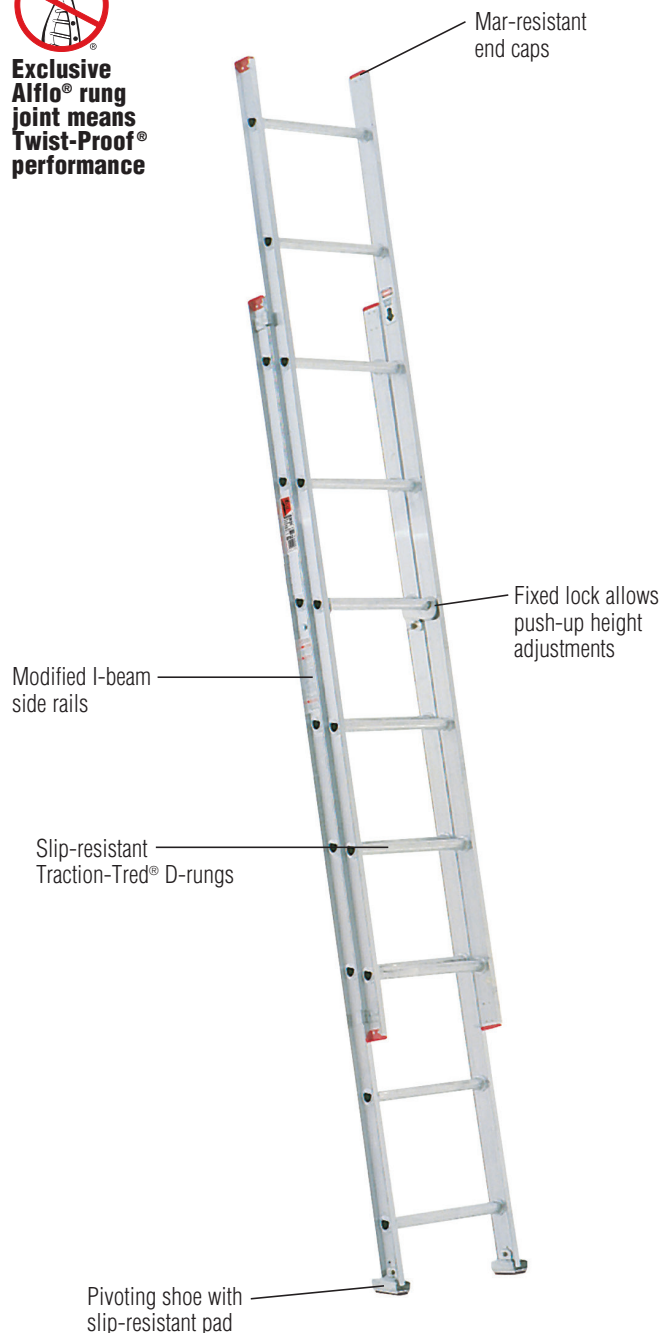

SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D716-2	16'	13'	4.6	17.5

DIMENSIONS

Rails:	2-1/2" wide	Rungs:	1-1/4"
Flange:	3/4" wide	Base Width:	15-3/4" outside rails






ALUMINUM EXTENSION LADDER COMPARISON CHART

Features and Benefits	D500-2 SERIES	D1500 SERIES	D1800-2EQ SERIES	D1300-2 SERIES	D1700-2EQ SERIES	D1200-2 SERIES	D1100-2 SERIES	D716-2 MODEL
	TYPE IAA/IA	TYPE IA	TYPE I	TYPE I	TYPE II	TYPE II	TYPE III	TYPE III
Rope clamp ties rope to rung	★	★	★	★	★	★	★	
Heavy duty shoe with slip-resistant tread and spur plate	★							
Removable sections for use as a single ladder	★	★	★	★	★	★	★	
External guide brackets		★						
Pivoting shoe							★	★
Slip-resistant shoe with Shu-lok® feature and spur plate		★	★	★	★	★		
Interlocking side rails	★		★	★	★	★	★	
Rope and pulley system	★	★	★	★	★	★	★	
Spring loaded locks	★	★	★	★	★	★	★	
Modified I-beam rails	★	★	★	★	★	★	★	★
Alflo® rung joint for Twist-Proof® performance	★	★	★	★	★	★	★	★
Mar-resistant end caps	★	★	★	★	★	★	★	★
Slip-resistant Traction-Tred® D-rungs	★	★	★	★	★	★	★	★
Integrated Leveling			★		★			

MTSERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Telescoping MultiLadder^{††}

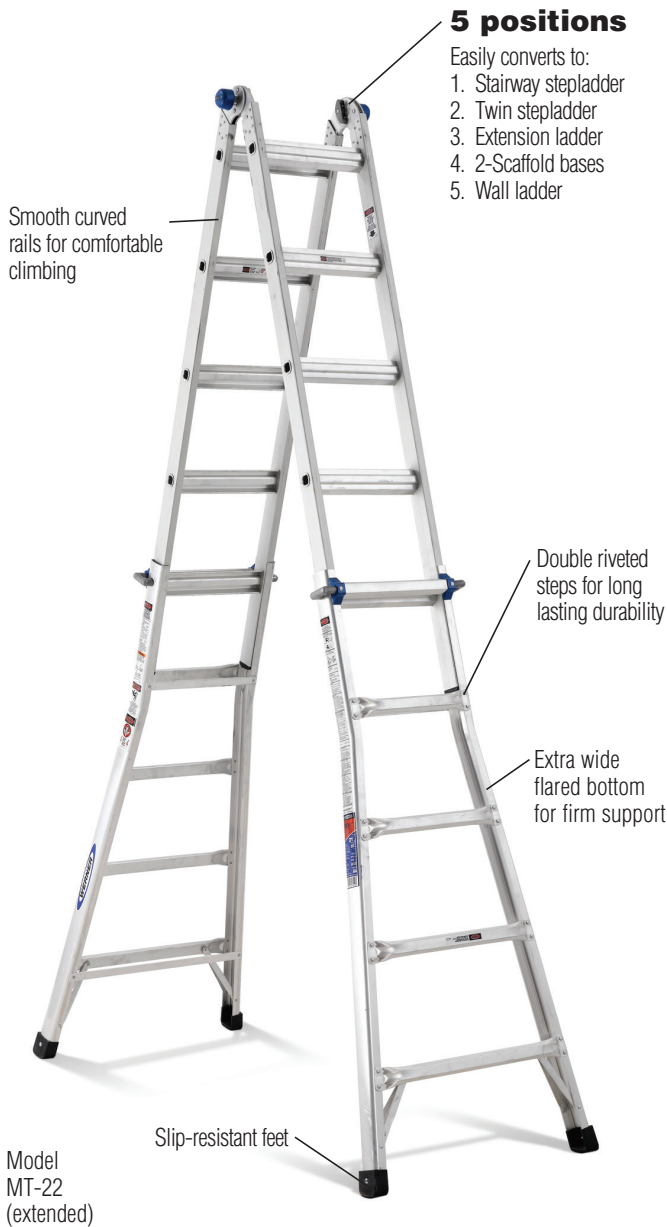

- Telescoping design for maximum versatility

SPECIFICATIONS

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
MT-13	3' to 5'	7' to 11'	3' to 5'	1' to 2'	5.9	31.5
MT-17	4' to 7'	9' to 15'	4' to 7'	1' to 3'	6.9	39.5
MT-22	5' to 9'	11' to 19'	5' to 9'	1' to 4'	10.8	47.0
MT-26	6' to 11'	13' to 23'	6' to 11'	1' to 5'	12.3	62.6

^{††}Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Rails:	2-5/8" wide	Rungs:	1" wide
Flange:	1" wide		

M1ASERIES

★★★★ **300lbs.** LOAD CAPACITY **TYPE IA**
PER SIDE DUTY RATING

STYLE: Folding MultiLadder^{††}



- Shippable by ground parcel services
- Set-up of some positions requires additional equipment, not included.

SPECIFICATIONS

Model No.	Closed Height	Scaffold Height	Stepladder Height	Straight Ladder Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M1A-6-12B	40-5/8"	3'	6'	12'	4.0	33.5
M1A-8-16B	52-5/8"	4'	8'	16'	5.2	39.5

^{††}Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Rails:	2-1/2" wide	Rungs:	1-1/4" multi-directional round type
Flange:	1" wide		

MT1AASERIES

★★★★ **375lbs.** LOAD CAPACITY **TYPE IAA** DUTY RATING
PER SIDE

STYLE: Telescoping MultiLadder††


5 positions

- Easily converts to:
1. Twin stepladder
 2. 2-Scaffold bases
 3. Stairway stepladder
 4. Extension ladder
 5. Wall ladder

Smooth curved rails for comfortable climbing



Model MT-13 (Twin stepladder)

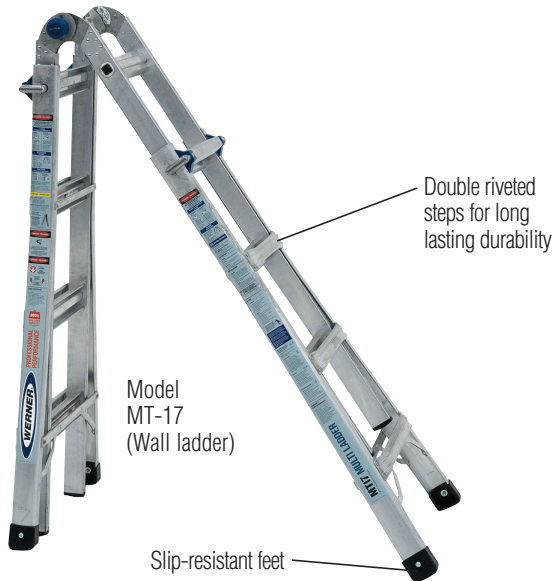

Model MT-17 (Wall ladder)

- Telescoping design for maximum versatility

SPECIFICATIONS

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
MT1AA-13	3' to 5'	7' to 11'	3' to 5'	1' to 2'	5.9	27.5
MT1AA-17	4' to 7'	9' to 15'	4' to 7'	1' to 3'	6.9	35.1
MT1AA-22	5' to 9'	11' to 19'	5' to 9'	1' to 4'	10.8	45.6

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

DIMENSIONS

Rails:	2-5/8" wide	Rungs:	1" wide
Flange:	1" wide		

MT MULTI LADDER

5 LADDERS IN 1


MT1AA-22



TWIN STEPLADDER



2 SCAFFOLD BASES

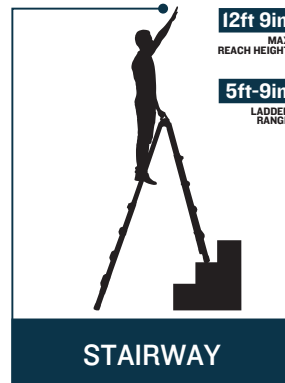

STAIRWAY



EXTENSION



WALL



Model MT1AA-22 (Stairway stepladder)

AH SERIES

★★★★★ **375 lbs.** LOAD CAPACITY

STYLE: Aluminum Folding Attic Ladder
STANDARD / EXTRA WIDE OPENINGS



Step-by-Step Installation Made Easy
Online Video
werneratticladders.com

- Lightweight – easy to open, close and install
- Attractive – will not splinter, decay or rust

SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AH2210	22-1/2" x 54"	7'8" to 10'3"	14-1/8"	6.8	48.5
AH2510	25" x 54"	7'8" to 10'3"	17-1/8"	7.6	52.0
AH2512	25" x 66"	10'5" to 12'	17-1/8"	9.2	58.5

DIMENSIONS

Rails:	2-3/8" wide	Steps:	3" wide
Flange:	1-1/2" wide		

AA MODEL

★★★ **250 lbs.** LOAD CAPACITY

STYLE: Compact Aluminum Attic Ladder
BUILT FOR SMALL OPENINGS



Step-by-Step Installation Made Easy
Online Video
werneratticladders.com



SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Floor Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AA1510	18" x 24" Minimum	7' to 9'10"	12-1/8"	2.55	15.5


DIMENSIONS

Rails:	5/8" x 2-1/8" wide	Steps:	1-3/16" wide
--------	--------------------	--------	--------------

WH SERIES

350 lbs. LOAD CAPACITY

**STYLE: Wood Folding Heavy Duty Attic Ladder
STANDARD / EXTRA WIDE OPENINGS**

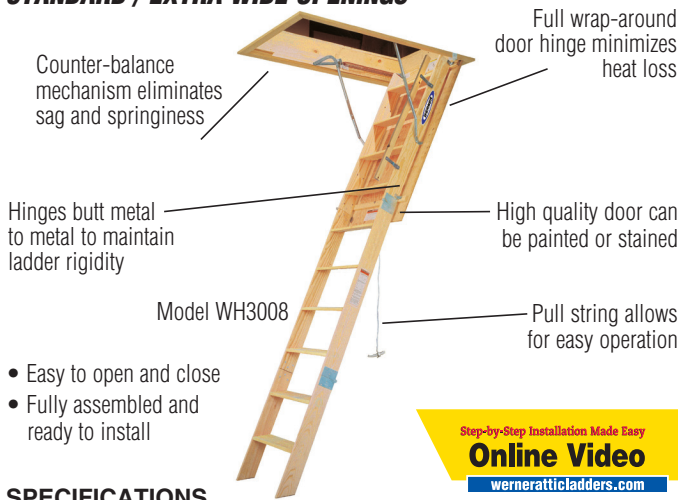

- Easy to open and close
- Fully assembled and ready to install

Step-by-Step Installation Made Easy
Online Video
werneratticladders.com

SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
WH2208	22-1/2" x 54"	7' to 8'9"	14-1/4"	10.55	59.5
WH2210	22-1/2" x 54"	8'9" to 10'3"	14-1/4"	10.55	64.5
WH2508	25" x 54"	7' to 8'9"	16-3/4"	11.96	62.5
WH2510	25" x 54"	8'9" to 10'3"	16-3/4"	11.96	67.5
WH3008	30-1/2" x 54"	7' to 8'9"	22 1/4"	14.30	73.5
WH3010	30-1/2" x 54"	8'9" to 10'3"	22 1/4"	14.30	76.5

NOMINAL DIMENSIONS

	Actual Lumber Size	Rough Lumber Size
Rails:	3/4" x 4-1/2"	1" x 5"
Grooved Steps:	3/4" x 4-1/2"	1" x 5"

WS SERIES

250 lbs. LOAD CAPACITY

**STYLE: Wood Folding Attic Ladder
STANDARD / EXTRA WIDE OPENINGS**



- Easy to open and close
- Fully assembled and ready to install

Step-by-Step Installation Made Easy
Online Video
werneratticladders.com

SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
W2208	22 1/2" x 54"	7' to 8'9"	14-1/4"	8.61	48.6
W2210	22 1/2" x 54"	8'9" to 10'4"	14-1/4"	8.61	51.3
W2508	25" x 54"	7' to 8'9"	16-3/4"	9.76	51.2
W2510	25" x 54"	8'9" to 10'4"	16-3/4"	9.76	53.9

NOMINAL DIMENSIONS

	Actual Lumber Size	Rough Lumber Size
Rails:	3/4" x 3-1/2"	1" x 4"
Grooved Steps:	3/4" x 3-1/2"	1" x 4"

ATTIC LADDER COMPARISON CHART

Product Advantages	AH SERIES	AA SERIES	WH SERIES	WS SERIES
Material	Aluminum	Aluminum	Wood	Wood
Style	Folding	Sliding	Folding	Folding
Size	8 ft., 10 ft., 12 ft.	7' - 9' 10"	8 ft., 10 ft.	8 ft., 10 ft.
Load Capacity	375 lbs.	250 lbs.	350 lbs.	250 lbs.
Ceiling Height Range	7' to 12'	7' to 9'10" (floor to floor)	7' to 10' 3"	7' to 10' 4"
Locking Device	Gas Strut	N/A	Spring	Spring
Opening Device	Rope	Push/Pull Rod	Rope	Rope
Door Material	Plywood	Not Included (Door hardware included)	Plywood	Plywood
Frame Material	Pine	N/A	Pine	Pine
Full Width Door Hinge	Yes	N/A	Yes	Yes
Metal-to-Metal Rail Hinge	Yes	N/A	Yes	Yes
Requires Cutting Rail	Yes	No	Yes	Yes
Separate Foot Attachment	Yes	No	No	No
Number of People for Installation	Two	One	Two	Two
Step Depth	3"	1-3/16"	4-1/2"	3-1/2"
Finished Rails with Eased Edges	2-3/8" wide	2-1/8" wide	4-1/2" wide	3-1/2" wide
Approximate Shipping Weight	48-58 lbs.	15.5 lbs.	59-76 lbs.	48-54 lbs.

AP-20SERIES

★★ **225/lbs.** LOAD CAPACITY

STYLE: Work Platform



Large platform provides a non-skid area for standing

Platform legs lock securely in place when in use and fold underneath platform for compact storage

Non-marring feet provide slip-resistance and protect floor from damage

Model AP-20



Work comfortably along walls and windows. Ideal for painting.

SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-20*	20-9/16"	50-1/4"	15-5/8"	2.1	12.1
AP-20-MP6†	41"	16-5/8"	35-3/4"	14.1	75.0

* Note: Dimensions of fully open individual unit † Note: Dimensions for packaged unit of 6

DIMENSIONS

Top Deck: 39-1/2" x 12"	Highest Standing Level: 20-9/16"
-------------------------	----------------------------------

AP-25MODEL

★★★★ **300/lbs.** LOAD CAPACITY

STYLE: Work Platform



Large 45in x 12in Pro deck is 12% larger and provides a non-slip work surface

Platform legs lock securely in place when in use and fold underneath platform for compact storage

Non-marring feet provide slip-resistance and protect floor from damage

Model AP-25



EASY-GRAB handles make it simple to carry your platform quickly and safely

SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-25*	20-1/32"	52-13/32"	15-5/16"	1.5	14.8

* Note: Dimensions of fully open individual unit

DIMENSIONS

Top Deck: 45" x 12"	Highest Standing Level: 20"
---------------------	-----------------------------

AP-30MODEL

★★★★★ **300/lbs.** LOAD CAPACITY

STYLE: Work Platform



Extra-large platform with increased tread for extra stability

Platform legs lock securely in place when in use and fold underneath platform for compact storage

Non-marring feet provide slip-resistance and protect floor from damage

Model AP-30



Multi-use platform

SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-30*	20-9/16"	58-3/4"	19-5/8"	3.3	19.0
AP-30-MP6†	49-1/2"	20-1/2"	33-7/8"	19.9	120

* Note: Dimensions of fully open individual unit † Note: Dimensions for packaged unit of 6

DIMENSIONS

Top Deck: 48" x 16"	Highest Standing Level: 20-9/16"
---------------------	----------------------------------

AP-35MODEL

★★★★★ **375/lbs.** LOAD CAPACITY

STYLE: Work Platform



Extra-Large 48in x 16in Pro deck for extra stability and comfort

Platform legs lock securely in place when in use and fold underneath platform for compact storage

Non-marring feet provide slip-resistance and protect floor from damage

Model AP-35



Link up to four together for up to 16' of continuous work surface

SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-35*	20-17/32"	54-7/8"	19-15/32"	2.5	22

* Note: Dimensions of fully open individual unit

DIMENSIONS

Top Deck: 48" x 16"	Highest Standing Level: 20"
---------------------	-----------------------------

PS-48 MODEL

500/bs. LOAD CAPACITY*

STYLE: Portable Scaffold

Multiple Working Heights



Mar-resistant wheels
High grade wheels prevent marring by locking securely into place



Multi-use S-Hooks make transportation easy and are ToolLasso® ready



Extra wide 10" plank for secure standing and comfort

- Versatile; can be used as push cart, storage shelf or work bench

*250 lbs. per plank (500 lbs. combined)

SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft Per Packaged Unit	Approx. Shipping Wt. Lbs.
PS-48	50-1/8"	46-1/8"	25-1/2"	3.4	60.0


PLANK DIMENSIONS

	Length	Width
Narrow Plank	46"	6"
Wide Plank	46"	10"

SRS-72 MODEL

1000/bs. LOAD CAPACITY*

STYLE: 6' Steel Rolling Scaffold

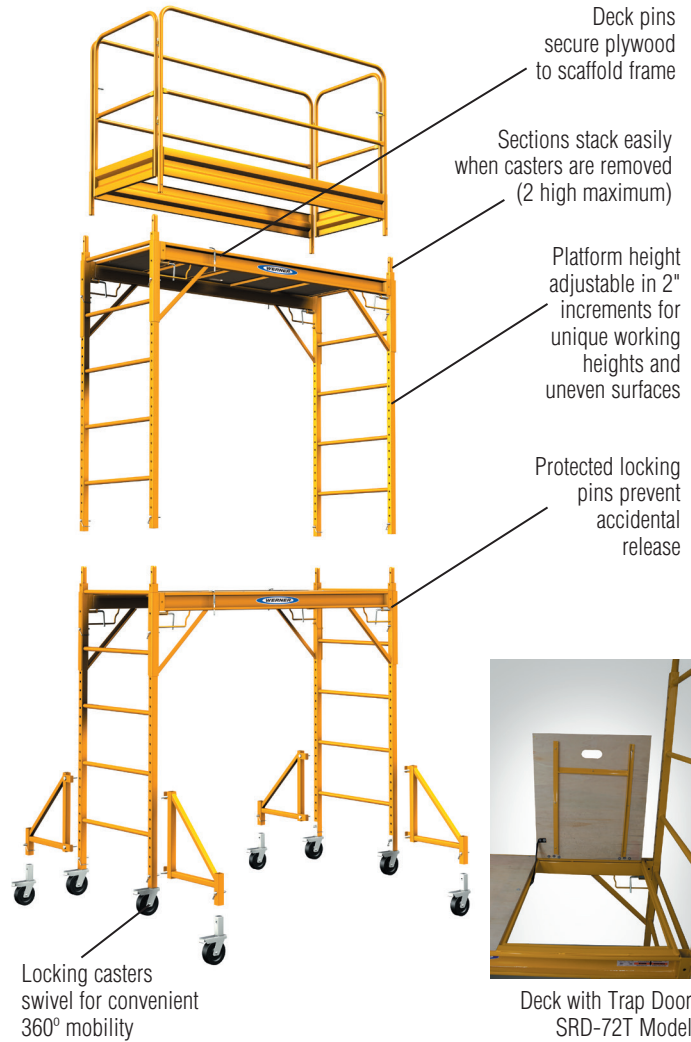

Deck pins secure plywood to scaffold frame

Sections stack easily when casters are removed (2 high maximum)

Platform height adjustable in 2" increments for unique working heights and uneven surfaces

Protected locking pins prevent accidental release

Locking casters swivel for convenient 360° mobility



Deck with Trap Door SRD-72T Model

- Easy one-person assembly- No tools required for quick setup and tear down.

*1000 lbs. load capacity distributed evenly

DIMENSIONS

Model No.	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRS-72	29-1/2"	73-3/4"	74-7/8"	127
SRS-72T	29-1/2"	73-3/4"	74-7/8"	130

COMPONENT DIMENSIONS

Component	Quantity Included	Approx. Width	Approx. Length	Approx. Height
Frames	2	29"	68-3/4"	1-1/2"
Arm Braces	2	1-1/2"	73-7/8"	17-7/8"
Plywood Deck	1	28-1/2"	66-3/4"	1-1/2"
Locking Casters	4	5-1/8"	9-7/8"	—

ACCESSORIES (AVAILABLE SEPARATELY)


Model No.	Description	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRO-72-4	Outriggers (4-pc master carton)	18"	20-3/4"	—	37.5
SRO24-72-4	Outriggers (4-pc master carton)	18"	24"	—	38
SRG-72	Guard Rail and Toeboard Kit	28-7/8"	69-5/8"	42"	70.5
SRC-72-4	Castors (4-pc master carton)	5-1/8"	1-1/8"	9-7/8"	20.0
SRD-72	Plywood Deck	28-1/2"	66-3/4"	2"	32.5
SRD-72T	Plywood Deck with Trap Door	28-1/2"	66-3/4"	2"	35.5

Note: Outriggers and Guard Rails are required when working height reaches 10'

WORKPLATFORMS

PA200 SERIES – ALUMINUM EXTENSION PLANK

- 1 person, 250 lb. Load Capacity.
- For use on stepladders, telescoping multiladders, extension trestle ladders and extension and single ladders equipped with ladder jacks.

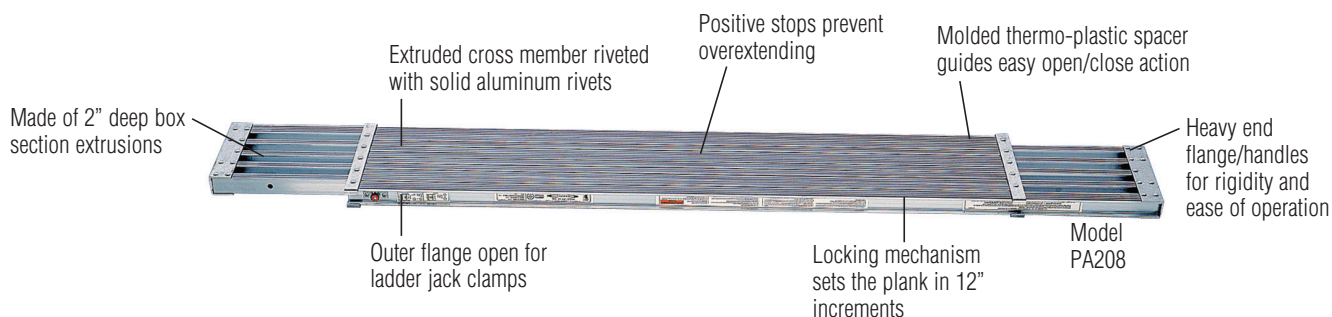

SPECIFICATIONS

Model No.	Closed Position	Open Position	Approx. Width	Inner Rails	Outer Flanged Rails	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PA206	6'	9'	14"	1-1/8" x 2"	1-7/8" x 2"	1.5	31.0
PA208	8'	13'	14"	1-1/8" x 2"	1-7/8" x 2"	2.0	40.5
PA210	10'	17'	14"	1-1/8" x 2"	1-7/8" x 2"	2.5	56.5

Note: When assembled as scaffold or staging, these planks must be used in conjunction with suitable guard rail protection in compliance with applicable governmental codes, ordinances, regulations and safe practice.

5600 SERIES- 2-PIECE EXTRUDED ALUMA-BOARD™

SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5607-19	75 lbs.	19-1/16"	7'	2"	30.0




Model 5607-19

FOR USE WITH STEEL SCAFFOLDS

5500 SERIES - ALUMINUM DECKED ALUMA-PLANK®

SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5507-19	75 lbs.	19-1/16"	7'	3"	25.0
5508-19	75 lbs.	19-1/16"	8'	4"	34.0
5510-19	75 lbs.	19-1/16"	10'	4"	43.0

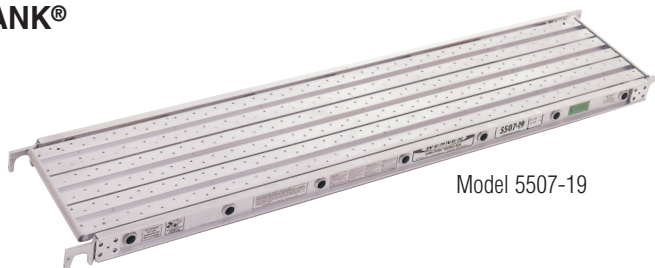

Model 5507-19

FOR USE WITH STEEL SCAFFOLDS

5300 SERIES - PLYWOOD DECKED ALUMA-PLANK®

SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5307-19	75 lbs.	19-1/16"	7'	3-1/2"	27.0
5308-19	75 lbs.	19-1/16"	8'	4-1/2"	38.0
5310-19	75 lbs.	19-1/16"	10'	4-1/2"	47.0
5307-24	75 lbs.	24"	7'	4"	32.0
5310-24	75 lbs.	24"	10'	4-1/2"	53.0



Model 5310-19

FOR USE WITH STEEL SCAFFOLDS

ALUMINUMPUMP JACK SYSTEM

- Versatile, dependable and easy to operate
- Field replaceable components
- Compatible and interchangeable with the leading competitor




Note: When working 10 ft. and above, OSHA requires fall protection. Refer to product labels.

<p>① Foldable Support Brace (PJ-SBF)</p> <p>(Rigid Support Brace available)</p>	<p>② Nestable Stage (WNS 2512)</p> <p>(other sizes available)</p>	<p>③ Safety Net (PJ-SN)</p>	<p>④ Work Bench (PJ-WB)</p>	<p>⑤ Pump Jack (PJ-100)</p>	<p>⑥ End Rail Kit (narrow) (PJ-ERN)</p> <p>PJ-ERW kit for wide span available</p>	<p>⑦ 24' Aluminum Pole (PJ-24P)</p> <p>Also available: 6' (PJ-6P) 12' (PJ-12P) 18' (PJ-18P)</p>
---	---	-----------------------------	-----------------------------	-----------------------------	---	---

- **Pump Jack**
- **Work Bench**
- **Poles and Braces**
- **End Rail Kits**
- **Safety Net**



Nestable Stages



- Continuous work platform reduces trip hazard
- 2 Person – 500 lbs. Rated

PUMP JACK COMPONENTS


Model No.	Description	Approx. Shipping Wt. Lbs.
PJ-100	Pump jack	30.0
PJ-PF-4	Pole foot	3.0
PJ-6P	6' aluminum pole	14.0
PJ-12P	12' aluminum pole	28.0
PJ-18P	18' aluminum pole	42.0
PJ-24P	24' aluminum pole	56.0
PJ-PC	Pole connector	12.0
PJ-SBF	Foldable support brace	9.0
PJ-SBR	Rigid support brace	14.0
PJ-WB	Work bench	15.0
PJ-ERN	End rail kit (narrow)	15.0
PJ-ERW	End rail kit (wide)	17.0
PJ-SN	Safety net	14.0

NESTABLE STAGES

2-person - 500 lbs. rated


Model No.	Nestable Stage Description	Approx. Shipping Wt. Lbs.
WNS-2412	14" x 12'	46.0
WNS-2416	14" x 16'	63.0
WNS-2420	14" x 20'	86.0
WNS-2424	14" x 24'	115.0
WNS-2512	20" x 12'	54.0
WNS-2516	20" x 16'	75.0
WNS-2520	20" x 20'	103.0
WNS-2524	20" x 24'	122.0
WNS-2612	24" x 12'	62.0
WNS-2616	24" x 16'	81.0
WNS-2620	24" x 20'	116.0
WNS-2624	24" x 24'	139.0

STEELPUMP JACK SYSTEM

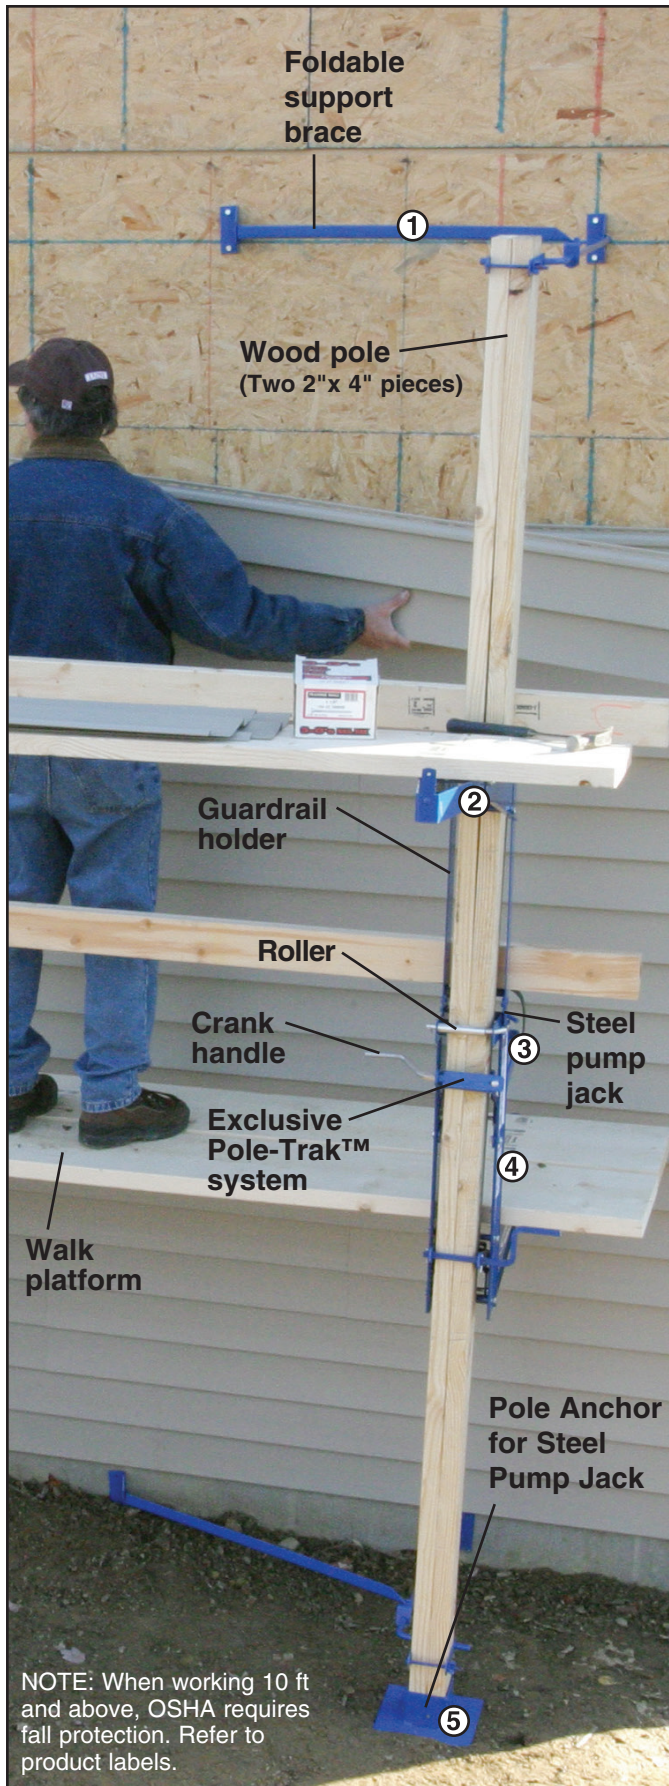

- Exclusive Pole-Trak™ system with rugged hand crank and safety brake
- Slip-resistant foot lever with oversized boot strap
- Accommodates up to a 24" wide plank
- Economical and easy to operate
- Meets ANSI and OSHA standards

- **Pump Jack**
- **Work Bench with Guard Rail Holder**
- **Pole Anchor**
- **Foldable Brace**

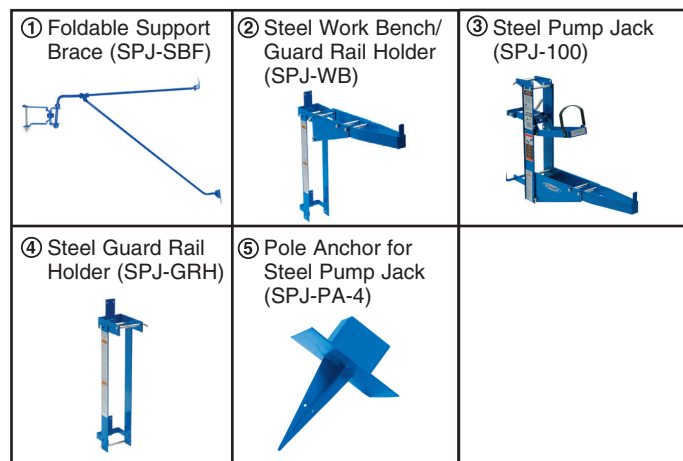


COMPONENTS SHOWN

Description	Model Number	Product Weight (lbs)
① Foldable Support Brace	SPJ-SBF	7.0
② Steel Work Bench/Guard Rail Holder	SPJ-WB	11.0
③ Steel Pump Jack	SPJ-100	23.0
④ Steel Guard Rail Holder	SPJ-GRH	5.5
⑤ Pole Anchor for Steel Pump Jack (Shipped in 4-packs)	SPJ-PA-4	5.5 (4-pk weight: 23.0)

ALUMINUM TASK-MASTER® STAGES

- Twist-Proof® Stage Design
- Ideal for ladder jack applications, swing stages or catwalks

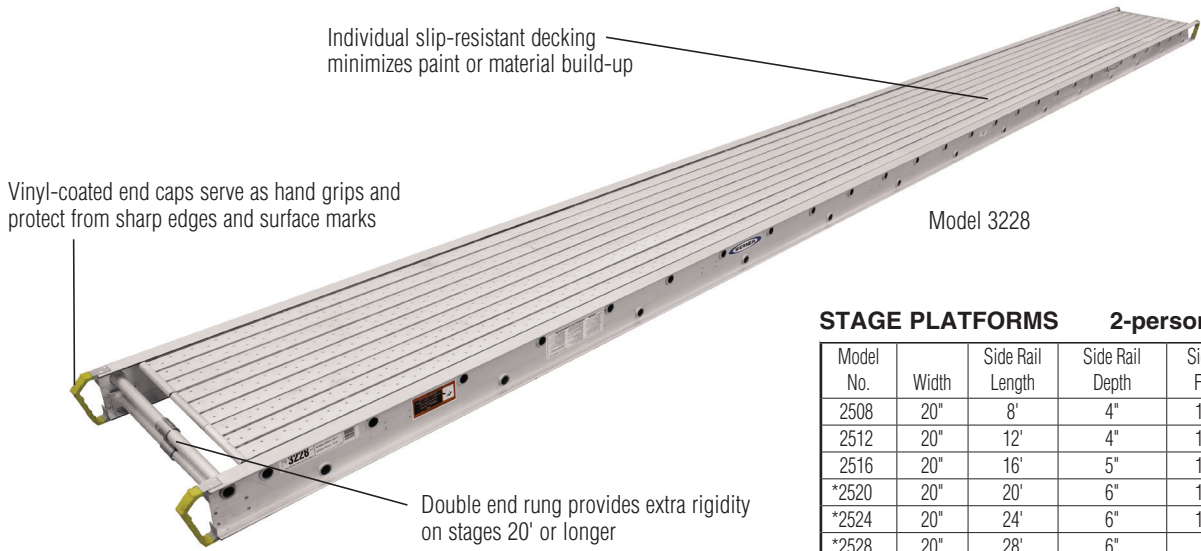

Model 3228

DECORATOR PLANKS 1-person - 250 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2008	12"	8'	4"	1-3/8"	25.0
2012	12"	12'	4"	1-3/8"	36.0
2016	12"	16'	4"	1-3/8"	48.0
2020	12"	20'	5"	1-3/8"	65.0
2024	12"	24'	5"	1-3/8"	78.0

SCAFFOLD PLANKS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2316	12"	16'	4"	1-3/8"	48.0
2320	12"	20'	6"	1-3/8"	79.0
2324	12"	24'	6" Heavy Duty	1-3/8"	112.0
2328	12"	28'	6" Heavy Duty	1-3/8"	131.0
2330	12"	30'	6" Heavy Duty	1-3/8"	140.0
2332	12"	32'	6" Heavy Duty	1-3/8"	149.0
2408	14"	8'	4"	1-3/8"	27.0
2412	14"	12'	4"	1-3/8"	40.0
2416	14"	16'	5"	1-3/8"	58.0
2420	14"	20'	6"	1-3/8"	85.0
2424	14"	24'	6"	2"	109.0
2428	14"	28'	6"	2"	127.0
2432	14"	32'	6" Heavy Duty	2"	182.0


STAGE PLATFORMS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2508	20"	8'	4"	1-3/8"	33.0
2512	20"	12'	4"	1-3/8"	48.0
2516	20"	16'	5"	1-3/8"	70.0
*2520	20"	20'	6"	1-3/8"	102.0
*2524	20"	24'	6"	1-3/8"	121.0
*2528	20"	28'	6"	2"	157.0
*2532	20"	32'	6"	2"	179.0
2608	24"	8'	4"	1-3/8"	38.0
2612	24"	12'	4"	1-3/8"	56.0
2616	24"	16'	5"	1-3/8"	81.0
*2620	24"	20'	6"	1-3/8"	115.0
*2624	24"	24'	6"	1-3/8"	138.0
*2628	24"	28'	6"	2"	168.0
*2632	24"	32'	6"	2"	191.0
2708	28"	8'	4"	1-3/8"	41.0
2712	28"	12'	4"	1-3/8"	60.0
2716	28"	16'	5"	1-3/8"	87.0
*2720	28"	20'	6"	1-3/8"	124.0
*2724	28"	24'	6"	1-3/8"	147.0
*2728	28"	28'	6"	2"	187.0
*2732	28"	32'	6"	2"	213.0

3-person - 750 lbs. rated

3112	24"	12'	4"	2"	64.0
3116	24"	16'	5"	2"	92.0
*3120	24"	20'	5"	2"	115.0
*3124	24"	24'	6"	2"	145.0
*3128	24"	28'	6" Heavy Duty	2"	204.0
*3132	24"	32'	6" Heavy Duty	2"	236.0
*3136	24"	36'	6" Heavy Duty	2"	323.0
*3139	24"	39'	6" Heavy Duty	2"	365.0
3208	28"	8'	4"	2"	48.0
3212	28"	12'	4"	2"	71.0
3216	28"	16'	5"	2"	103.0
*3220	28"	20'	5"	2"	128.0
*3224	28"	24'	6"	2"	161.0
*3228	28"	28'	6" Heavy Duty	2"	220.0
*3232	28"	32'	6" Heavy Duty	2"	251.0
*3236†	28"	36'	6" Heavy Duty	2"	344.0
*3239†	28"	39'	6" Heavy Duty	2"	388.0

*Includes set of double rungs at the end of stage. †Includes reinforcing channel

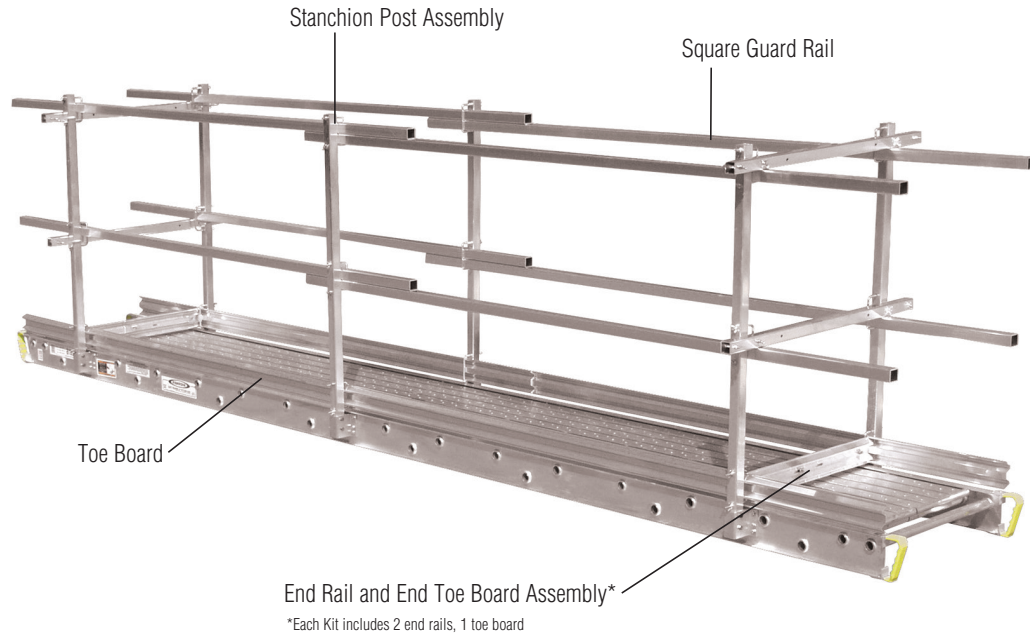

SQUARE MODULAR GUARD RAIL SYSTEM

System Sizing: How do I size a guard rail system?

The following steps show how to size a single-sided, three-sided, and four-sided guard rail system:

- Step 1: Determine the stage length and width.
- Step 2: Determine whether guardrail system is one-, two-, three-, or four -sided.
- Step 3: Read across the row to determine component requirements.
- Step 4: If ordering a three- or four-sided system, order two ERT-N for 12" and 14" wide stages, and two ERT-W for all stages 20" wide or greater.

Note: If ordering a two sided system, double the single sided component requirement.

Model No.	Description	Approx. Shipping Wt. Lbs.
ERT-N	End rail and end toe board assembly - narrow	4.5
ERT-W	End rail and end toe board assembly - wide	7.0
SSP-47	Stanchion post assembly	5.0
SGR-09	1-1/2" square guard rail cut length - 108"	6.0
SGR-13	1-1/2" square guard rail cut length - 156"	8.5
STB-09	3-1/2" toe board cut length - 108"	4.5
STB-13	3-1/2" toe board cut length - 156"	6.5

Stage Length	Single-sided					Three-sided					Four-sided						
	SSP-47	SGR-09	SGR-13	STB-09	STB-13	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*
8'	2	2	0	1	0	4	2	0	1	0	2	4	4	0	2	0	2
12'	3	0	2	0	1	5	0	2	0	1	2	6	0	4	0	2	2
16'	3	4	0	2	0	5	4	0	2	0	2	6	8	0	4	0	2
20'	4	2	2	1	1	6	2	2	1	1	2	8	4	4	2	2	2
24'	5	4	2	2	1	7	4	2	2	1	2	10	8	4	4	2	2
28'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
32'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
36'	6	10	0	5	0	8	10	0	5	0	2	12	20	0	10	0	2
39'	7	4	4	2	2	9	4	4	2	2	2	14	8	8	4	4	2

*ERT-N is for 12" and 14" wide stages; ERT-W is for 20" wide and greater stages



ALUMINUM SCAFFOLDING

Werner aluminum scaffolding is best suited for construction and building maintenance applications, especially in high-traffic areas where mobility and appearance are important.

CONSTRUCTION:

- Drywall
- Insulation
- Drop ceilings
- Ductwork

BUILDING MAINTENANCE:

- Window and façade cleaning
- Changing light bulbs
- Painting
- Wallpapering

Aluminum scaffolding has benefits that steel scaffolding does not.

- More corrosion resistant
- Convenient - 30-50% lighter
- Easier and quicker to install
- Better on-site appearance

Werner offers scaffolding as towers, sections and individual components.

- Towers and sections for the one-time purchaser with limited scaffold knowledge
- Components for the regular purchaser with extensive knowledge on configuring a scaffold tower

Scaffolding can be used on inclines and stairs.

- For use on an incline, a scaffold tower must be secured to prevent movement.
- Scaffolding can be used on a stairway provided the horizontal braces from one end frame to the other are at the same level and adequate braces are used.

ALUMINUM SCAFFOLD TOWERS

- Easy and convenient to order.
- Takes the guesswork out of what is required to meet Code.
- Ideal for schools, hospitals and building maintenance.

Includes guard rails, toeboards and planks with access door that allows end users to climb from inside. 23' towers include additional fixed board (no access door). Outriggers included on all models except 4201-12, 4202-12 and 4203-12. These models meet the ANSI code as noted on Page 50 - "Notice".

Narrow Span Towers

Platform Length	Total Width (W)	Total Length (L)
6'	9' 6"	9' 6"
8'	9' 6"	11' 6"
10'	9' 6"	13' 6"



12' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-12	6'	29"	12'	15' 5"	359.0
4102-12	8'	29"	12'	15' 5"	389.0
4103-12	10'	29"	12'	15' 5"	410.5



18' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-18	6'	29"	17' 6"	20' 11"	405.0
4102-18	8'	29"	17' 6"	20' 11"	439.0
4103-18	10'	29"	17' 6"	20' 11"	462.5



23' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-23	6'	29"	23'	26' 4"	451.0
4102-23	8'	29"	23'	26' 4"	489.0
4103-23	10'	29"	23'	26' 4"	514.5

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck & scaffold.


Wide Span Towers



12' Platform Height*

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-12	6'	4-1/2'	12'	15' 5"	299.5
4202-12	8'	4-1/2'	12'	15' 5"	338.0
4203-12	10'	4-1/2'	12'	15' 5"	366.0


*Outriggers not included with 12' high platform wide span towers (Per ANSI code, does not require outriggers).

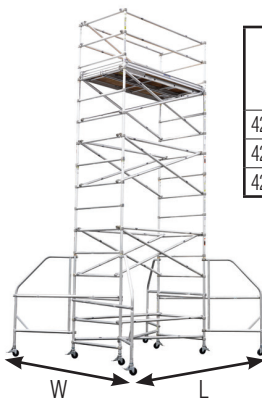

18' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-18	6'	4-1/2'	17' 6"	20' 11"	561.5
4202-18	8'	4-1/2'	17' 6"	20' 11"	610.0
4203-18	10'	4-1/2'	17' 6"	20' 11"	643.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"

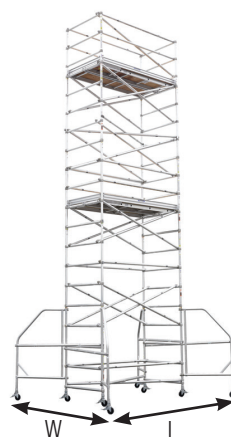

23' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-23	6'	4-1/2'	23'	26' 4"	695.0
4202-23	8'	4-1/2'	23'	26' 4"	778.0
4203-23	10'	4-1/2'	23'	26' 4"	862.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"


Load Capacity: 25 lbs. per sq. ft. or 500 lbs. per deck and 1,000 lbs. maximum per scaffold.

SCAFFOLD SECTIONS

- Easy and convenient to order.
- Enables user to easily add to an existing scaffold tower.
- Ideal for painting and remodeling contractors.

NARROW SPAN SCAFFOLD SECTIONS


Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and scaffold

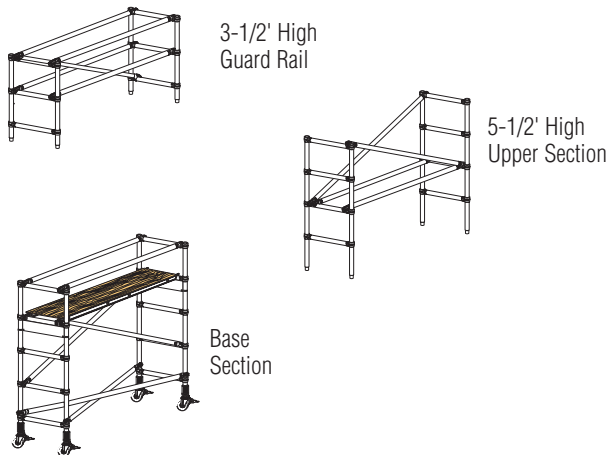

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
6' 6" to 7' 6" High Adjustable Base Sections			
4101	29"	6'	121.0
4102	29"	8'	133.0
4103	29"	10'	145.0
6-3/4' High Upper Sections			
4127	29"	6'	60.0
4128	29"	8'	65.0
4129	29"	10'	68.0
5-1/2' High Upper Sections			
4104	29"	6'	53.0
4105	29"	8'	58.0
4106	29"	10'	62.0
4' High Upper Sections			
4107	29"	6'	47.0
4108	29"	8'	51.0
4109	29"	10'	55.0
3-1/2' High Guard Rails			
4110	29"	6'	44.0
4111	29"	8'	48.0
4112	29"	10'	52.0

SNAP-UP® NARROW SPAN FOLDING SCAFFOLDS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and scaffold

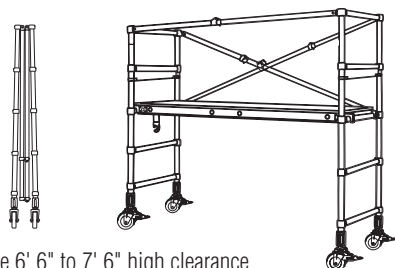


- Adjustable 6' 6" to 7' 6" high clearance

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
SNB-6U	29"	6'	127.0
SNB-8U	29"	8'	139.0

WIDE SPAN SCAFFOLD SECTIONS


Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and 1000 lbs. maximum per scaffold

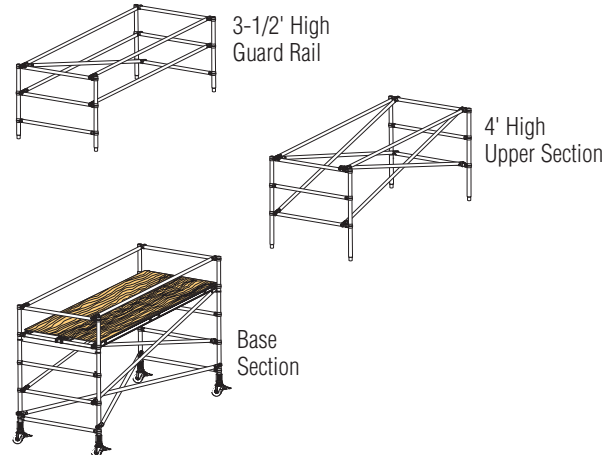

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
6' 6" to 7' 6" High Base Sections			
4201	4-1/2'	6'	167.0
4202	4-1/2'	8'	188.0
4203	4-1/2'	10'	208.0
5-1/2' High Upper Sections			
4204	4-1/2'	6'	71.0
4205	4-1/2'	8'	76.0
4206	4-1/2'	10'	81.0
4' High Upper Sections			
4207	4-1/2'	6'	62.0
4208	4-1/2'	8'	68.0
4209	4-1/2'	10'	73.0
3-1/2' High Guard Rails			
4210	4-1/2'	6'	55.0
4211	4-1/2'	8'	60.0
4212	4-1/2'	10'	65.0

SNAP-UP® WIDE SPAN FOLDING SCAFFOLDS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and 1000 lbs. maximum per scaffold

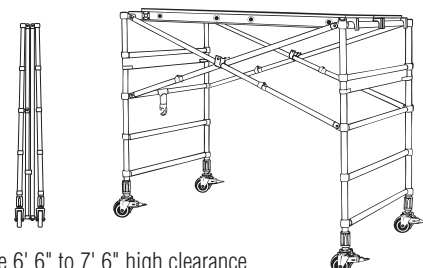

- Adjustable 6' 6" to 7' 6" high clearance

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
SWB-6U	4-1/2'	6'	163.0
SWB-8U	4-1/2'	8'	181.0

SCAFFOLD COMPONENTS

- Provides most flexibility during installation.
- Enables end user to easily convert to different length or height scaffold towers.
- All components available separately.
- Ideal for rental yards and theatrical and entertainment applications.

FRAMES

Model No.	Description	Approx. Shipping Wt. Lbs.
For Narrow Span, 29" Wide		
FNB-80	Base end frame	35.0
FNU-81	6-3/4' H upper end frame	19.0
FNU-65	5-1/2' H upper end frame	15.0
FNU-49	4' H upper end frame	12.0
FNG-42	Guard rail end frame	11.5
For Wide Span, 4-1/2' Wide		
FWB-80	Base end frame	39.5
FWU-81	6-3/4' H wide span upper end frame	22.0
FWU-65	5-1/2' H upper end frame	19.0
FWU-49	4' H upper end frame	14.5
FWG-42	Guard rail end frame	14.5


SCAFFOLD BOARDS

Model No.	Description	Approx. Shipping Wt. Lbs.
P22W-6	6' scaffold board	28.5
P22W-8	8' scaffold board	36.0
P22W-10	10' scaffold board	42.5
PD22W-6	22" wood deck with access door - 6' board	33.0
PD22W-8	22" wood deck with access door - 8' board	41.0
PD22W-10	22" wood deck with access door - 10' board	49.0

BRACES

Model No.	Description	Approx. Shipping Wt. Lbs.
BD-6	6' diagonal brace	4.0
BD-8	8' diagonal brace	5.0
BD-10	10' diagonal brace	5.5
BH-6	6' horizontal brace	4.0
BH-8	8' horizontal brace	5.0
BH-10	10' horizontal brace	5.5
BN-6	6' narrow span horizontal-diagonal brace	4.0
BN-8	8' narrow span horizontal-diagonal brace	5.0
BN-10	10' narrow span horizontal-diagonal brace	6.0
BW-6	6' wide span horizontal-diagonal brace	5.0
BW-8	8' wide span horizontal-diagonal brace	5.5
BW-10	10' wide span horizontal-diagonal brace	6.0


OUTRIGGERS for Wide and Narrow Span Scaffolds

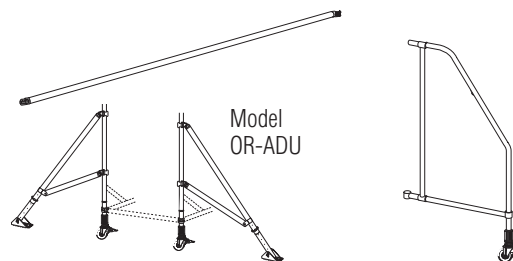

Note: Braces and Frames are ordered separately

Model No.	Description	Approx. Shipping Wt. Lbs.
BOR-N	Narrow span outrigger brace	4.0
BOR-W	Wide span outrigger brace	5.0
FRO	Rolling outrigger frame (with every frame, a brace is needed)	18.0
Knee-Type Outriggers		
OR-ADU	Adjustable 1' to 5' 6" wide for narrow or wide span scaffolds	11.0


TOE BOARD SYSTEMS




OSHA requires toe boards on scaffolds over 10' high

Model No.	Size	Approx. Shipping Wt. Lbs.
Aluminum Toe Board Assemblies for 4100 Series		
TN4A-6U	4" x 6'	18.0
TN4A-8U	4" x 8'	21.0
TN4A-10U	4" x 10'	25.0
Aluminum Toe Board Assemblies for 4200 Series		
TW4A-6U	4" x 6'	21.0
TW4A-8U	4" x 8'	25.0
TW4A-10U	4" x 10'	28.0

ACCESSORY KITS



**Kit No. 41-1
ONE SWIVEL
BASE
PLATE**



**Kit No. 43-1
GUARD RAIL HOLDER**
A Werner Exclusive

Includes four steel guard rails holders. With a set of guard rail holders, you can easily turn a horizontal brace into a guard rail.

NOTE: Guard Rail Holder fits Intermediate Scaffold Section Models: 4104-4109, 4127-4129, 4204-4209. They are not designed for Werner Co. Guard Rail Upper Section Models: 4110, 4111, 4112, 4210, 4211, 4212.

Kit No.	Description	Approx. Shipping Wt. Lbs.
41-1	One swivel base plate for stairway and span type scaffolds	8.0
43-1	Guard Rail Holder fits intermediate scaffold section models: 4104-4109, 4127-4129, 4204-4209.	1.2

NOTICE – ALL SCAFFOLDS: Maximum scaffold platform height is equal to 4x the smaller base section dimension of the scaffold or installed outrigger in most states except California which requires 3x. Check state and local codes.

SCAFFOLD/OUTRIGGER COMPONENT COMPARISON CHART

Scaffold Towers		Narrow Span (29" wide) Towers									Wide Span (4-1/2' wide) Towers									
Platform Length		6' Long			8' Long			10' Long			6' Long			8' Long			10' Long			
Component Model No.	Description	4101-12	4101-18	4101-23	4102-12	4102-18	4102-23	4103-12	4103-18	4103-23	4201-12	4201-18	4201-23	4202-12	4202-18	4202-23	4203-12	4203-18	4203-23	
FNB-80	Adjustable Base Section	2	2	2	2	2	2	2	2	2										
FNU-65	5-1/2' Upper Section	2	4	6	2	4	6	2	4	6										
FNG-42	Guard Rail	2	2	2	2	2	2	2	2	2										
FWB-80	Adjustable Base Section										2	2	2	2	2	2	2	2	2	2
FWU-65	5-1/2' Upper Section										2	4	6	2	4	6	2	4	6	
FWG-42	Guard Rail										2	2	2	2	2	2	2	2	2	2
PD22W-6, -8, -10*	Access Door Plank	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	
P22W-6, -8, -10*	Wood Deck										1	1	2	1	1	2	1	1	2	
BH-6, -8, -10*	Horizontal Brace	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12	
BD-6, -8, -10*	Diagonal Brace	5	7	9	5	7	9	5	7	9	9	13	17	9	13	17	9	13	17	
BN-6, -8, -10*	Horizontal-Diagonal	2	2	4	2	2	4	2	2	4										
BW-6, -8, -10*	Horizontal-Diagonal										2	2	4	2	2	4	2	2	4	
FRO	Outrigger	4	4	4	4	4	4	4	4	4		4	4		4	4		4	4	
BOR-N, -W	Outrigger Brace	4	4	4	4	4	4	4	4	4		4	4		4	4		4	4	
TN4A-6U, -8U, -10U	Toe Board	1	1	2	1	1	2	1	1	2										
TW4A-6U, -8U, -10U	Toe Board										1	1	2	1	1	2	1	1	2	

*-6, -8, -10 refers to platform length. Add suffix to model number for corresponding platform length.


RAMPS

ALUMINUM FOLDING ARCHED RAMPS MODEL R522

1500 lbs. Load Capacity Per Pair
(750 lbs. evenly distributed load capacity per ramp)
Shipping Weight: 35.0 lbs.

ARCHED FOR BOTH HIGH AND LOW CLEARANCE VEHICLES

- Folds and locks for easy transporting
- Center rail and transition plate for smooth loading
- Multi-purpose - Ideal for all wheel sizes
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required

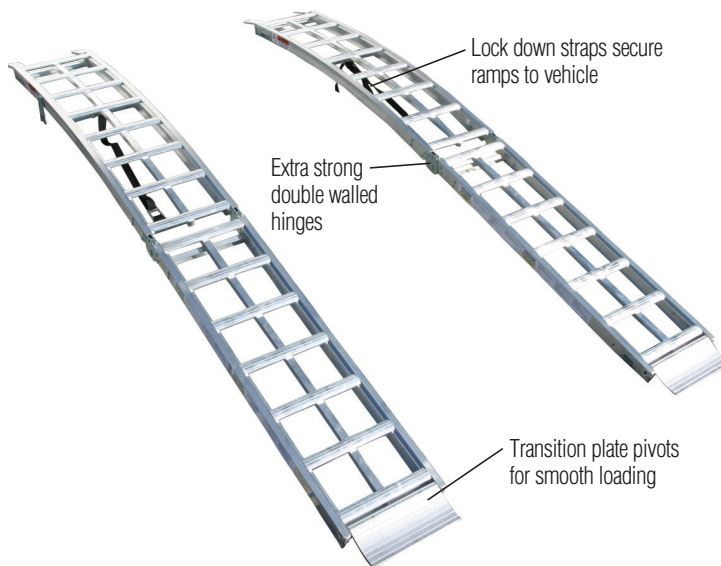


ALUMINUM ARCHED RAMPS MODEL R402

1400 lbs. Load Capacity Per Pair
(700 lbs. evenly distributed load capacity per ramp)
Shipping Weight: 22.0 lbs.

ARCHED FOR BOTH HIGH AND LOW CLEARANCE VEHICLES

- Multi-purpose
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required

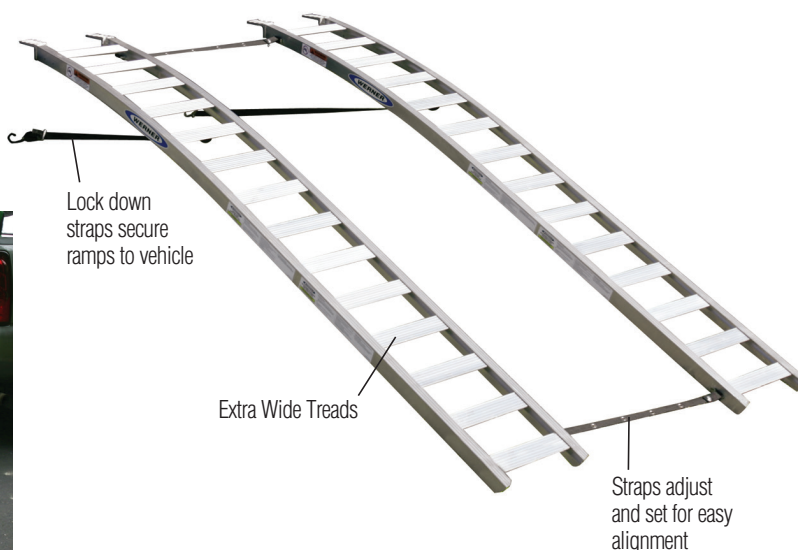

RAMPS


ALUMINUM STRAIGHT RAMPS MODEL R301

STRAIGHT FOR HIGH CLEARANCE VEHICLES

- Great for off-road vehicles
- Easily hook together for small wheelbases
- Includes 2 ramps - No assembly required



1300 lbs. Load Capacity Per Pair
(650 lbs. evenly distributed load capacity per ramp)
Shipping Weight: 20.0 lbs.

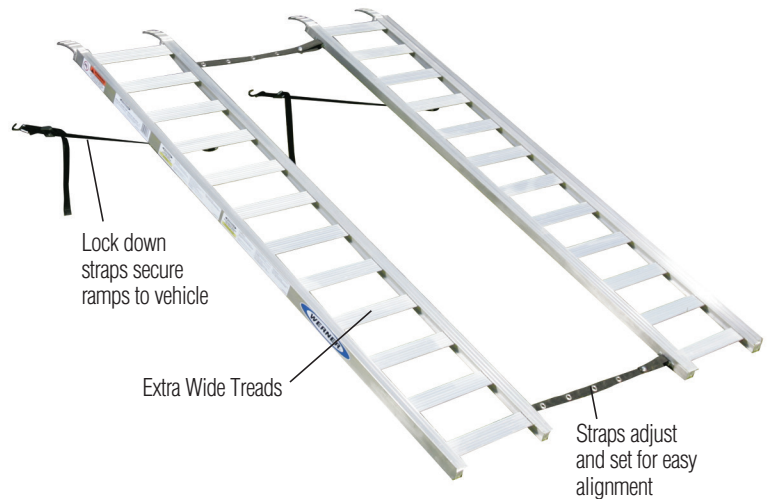

STEEL STRAIGHT RAMP KIT MODEL R102


STRAIGHT FOR HIGH CLEARANCE VEHICLES

- Works with two 2x8, 2x10 or 2x12 planks (not included).
- Ideal for many uses. Use as a single ramp or a pair.
- Great for off-road vehicles.
- Safety straps secure ramps to vehicle.
- Includes hardware for 2 ramps.



Up to 1400 lbs. Load Capacity Per Pair*
(700 lbs. evenly distributed load capacity per ramp)
Shipping Weight: 6.0 lbs.

*depending on material, grade and length of board

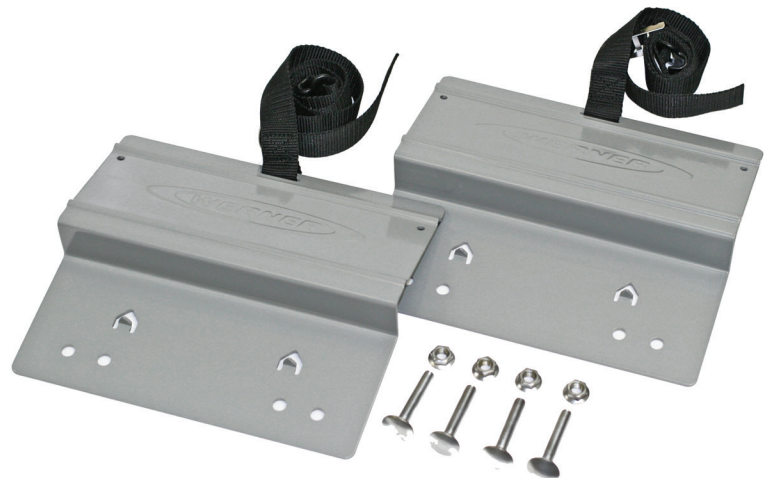

TRUCKRACKS

STEEL REMOVABLE PICKUP TRUCK RACK


250 lbs. Load Capacity

MODEL TR401-S (black)

Shipping Weight: 50.0 lbs.



Designed for work or play.

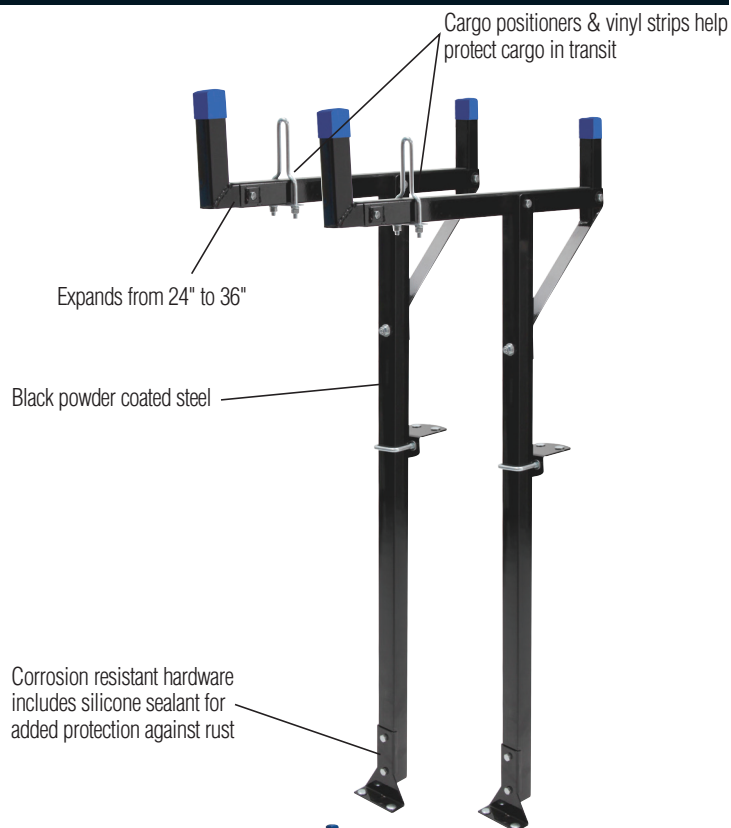

Cargo positioners & vinyl strips help protect cargo in transit.



Easily removes when not in use.

Some assembly required

KEY FEATURES (all racks)

- **Exclusive Vinyl Protector Strips:** Werner is the first in the industry to offer these as a standard feature to help protect your equipment against transit damage.
- **Universal Design:** Werner Van & Truck Racks fit all vans with rain gutters and most pickup trucks with 6-1/2' to 8' long beds.

STANDARD FEATURES

- All Werner Van & Truck Racks are made of welded 14 gauge square tubular steel for added strength.
- Double layer of glossy powder coated finish and corrosion resistant hardware are standard for added durability.

VAN RACKS


STEEL VAN RACK 600 lbs. Load Capacity MODEL VR401-W (white) Shipping Weight: 40.0 lbs.



Includes predrilled uprights.



Cargo positioners & vinyl strips help protect cargo in transit.

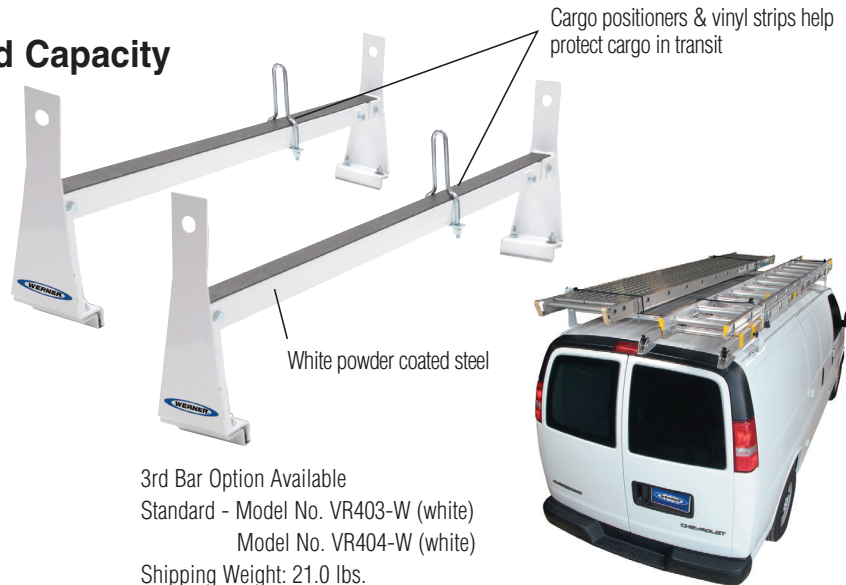

Cargo positioners & vinyl strips help protect cargo in transit

White powder coated steel

3rd Bar Option Available
Standard - Model No. VR403-W (white)
Model No. VR404-W (white)
Shipping Weight: 21.0 lbs.

Some assembly required

Van Rack Compatibility Chart

Van Year	Make	Model	Type	VR401-W	VR403-W	VR404-W
Up to 1997	Chevy	1500-3500	All	✓	✓	
1998 & Up	Chevy/GMC	Express/Savanna	All	✓		✓
1998 & Up	Chevy/GMC	Express/Savanna	Standard	✓		✓
1982 & Up	Ford	E-150, 250, 350	Standard	✓		✓
1982 & Up	Ford	Super	Long	✓		✓
Up to 1999	Dodge	B-150, 250, 350	Standard	✓	✓	
2000 to 2003	Dodge	B-150, 250, 350	Standard			
Up to 1999	Dodge	Maxie Van	Long	✓	✓	
2000 to 2003	Dodge	Maxie Van	Long			
2004 & Up	Dodge	Sprinter (Passenger & Cargo Models)	Standard Roof	✓	✓	
2004 & Up	Dodge	Sprinter (Passenger & Cargo Models)	High Roof & Mega Roof			
All	All	Gutterless/Mini	All			

MERCHANDISING MODULAR LADDER DISPLAYS & FIXTURES

55 END CAP DISPLAY



37 DISPLAY RACK



- Modular design for flexible retail footprint
- Easier access and organized ladder display
- Merchandises ladders and accessories
- Werner Performance System® signage included

SPECIFICATIONS

Model No.	No. of Ladders in Fixture	Overall dimensions	Method of Shipping	Approx. Shipping Wt. Lbs.
37 Display Rack	7	24-3/4" x 48" x 45-1/2"	UPS or Fed Ex	65.0
55 End Cap	14	50-1/2" x 49-1/2" x 85"	LTL	138.0

HOW TO ORDER FACTORY INSTALLED ACCESSORY KITS

Please follow these steps and refer to the chart below for purchasing a ladder accessory that is factory installed. Certain combinations of factory installed accessories to the same ladder are also available. Lead time for factory installed accessories may vary depending on availability. If you have a question or need assistance, please call customer service at 1-888-523-3371.

Step 1: Locate the ladder's model number and add an X on to the end of the model number.

Step 2: Use the chart provided and find the accessory you want attached. Add the 4 digit designator to the end of the ladder model number after the X.

Example: Ladder Model Number: D6220-2
Add the X to signify factory installation: D6220-2X
Accessory to install: APK80

Locate accessory on chart and find that "0004" designates this accessory being added.

MODEL TO ORDER: D6220-2X0004

Attached Accessories	Description	4-Digit Designator
A61	Combination Spur-Hoop Shoe	0038
A71	Padded Fixed V-Rung	0005
A72	Adjustable Pole Strap	0008
A74	Cable Hooks	0003
A78	Fly Section Shoe	0058
A81	Adjustable Pole Lashes	0089
A83	Rubber Padded Shoe	0049
A86	Spur Shoe	0007
A92	Cable Hook and V-Rung Assembly	0002
APK70	LevelLok® Ladder Leveler with 2 base units	0086
APK80	Level-Master Automatic Ladder Levelers	0004


See price list for added cost.

Werner's illustrations are representative and may not include all styles.


All accessories, attachments, and replacement parts are designed and tested for Werner Co. products only.



PaintCup & PaintCupLiner



JobBucket




UtilityBucket



JobCaddy



UtilityHook



ToolLasso®

CUSTOMIZE YOUR LADDER TOP



AC27-P

Paint Cup



- Great for trim painting and cut-in applications
- Built-in magnet to secure a paint brush
- Holds 1 quart of paint
- Can be used with disposable Paint Cup Liner AC27-L

Model No.	Fits on
AC27-P	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-1/8" x 13-3/4" x 10-7/8"	4.0

Shipping quantity
(6) units per carton

AC27-L

Paint Cup Liner



- Disposable liner makes clean up easy
- Each AC-27L unit includes 4 liners

Model No.	Fits on
AC27-L	AC27-P

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
5-1/8" x 13-3/8" x 10"	2.2

Shipping quantity
(10) units per carton
(40) liners per carton

AC50-JB-3

Job Bucket



- Increase ladder storage and maximize your work space
- Great for all trades: electrical, maintenance, plumbing, construction
- Integrated tape measure and screwdriver holders
- Top grooves hold round pipes in place
- 600 cubic inches of storage, 25 lbs. load capacity

Model No.	Fits on
AC50-JB-3	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/4" x 11-7/8" x 16-1/4"	6.6

Shipping quantity
(3) units per carton

TAKE LESS TRIPS UP THE LADDER



AC52-UB

Utility Bucket



- Expand your work surface
- Great for jobsite or household use
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook
- Ideal for wet or dry applications
- Holds up to one gallon of liquid, 25 lbs. capacity

Model No.	Fits on
AC52-UB	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
13-1/2" x 10-3/4" x 10-3/4"	4.5

*Shipping quantity
(3) units per carton*

AC54-JC

Job Caddy



- Holds large or odd shaped items like fluorescent bulbs or ceiling fan blades
- 4 storage compartments keep small parts separated
- Screwdriver, pliers, putty knife & towel holders
- End hook built in for increased convenience
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook

Model No.	Fits on
AC54-JC	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/2" x 8-3/8" x 10-3/8"	6.7

*Shipping quantity
(3) units per carton*

AC56-UH

Utility Hook



- Keep cords from getting tangled in your ladder
- Organize cords and keep them within reach
- Holds extension cords, air hoses, garden hoses, strands of lights, paint sprayers and other tools or project materials

Model No.	Fits on
AC56-UH	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-3/4" x 13-1/2" x 8"	2.8

*Shipping quantity
(10) units per carton*

AC58-TL

ToolLasso®



- Secures tools from falling
- Wraps around the grip of power tools, hand tools and caulk guns
- Locks into HolsterTop® to keep tools safe and ready to use
- Compatible with the ToolLasso® belt clip
- AC58-TL includes 1 belt clip and 2 ToolLassos

Model No.	Fits on
AC58-TL	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24, PS-48

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
10-7/8" x 12-1/4" x 9-3/4"	4.0

*Shipping quantity
(12) units per carton*

STEPLADDER ACCESSORIES

AC11

Stepladder Hanger



Hanger can be mounted on a wall to hold stepladders. Industrial strength coated steel wire construction.


User Installed Only

Kit No.	Approx. Shipping Weight
AC11	1.8 lbs. each

Shipping quantity
(6) units per carton

22

Fiberglass Rail Shields



Designed to reinforce. Shields may also be used to repair ladder if rail cracks occur no higher than 3/4" below bottom rivet of bottom step or horizontal and all holes in the rail are intact. Rail shield(s) come with mounting hardware. (1 front and 1 rear kit per stepladder; 2 front kits needed for trestle ladder)

User Installed Only

Kit No.	Fits on Front Rail of Fiberglass Series	Approx. Shipping Wt.
22-2F	6000, T6000, 6200, 7300, T6200, 7400 (MK 13 & up), T7400 (MK 11 & up), P7400 (MK 13 & up), PT7400 (MK 4 & up), E7400 (MK 7 & up)	1.5 lbs.
22-3F	7400 (up through MK 12), T7400 (up through MK 10), P7400 (up through MK 12), PT7400 (up through MK 3), E7400 (up through MK 6)	1.5 lbs.
Kit No.	Fits on Rear Rail of Fiberglass Series	Approx. Shipping Wt.
22-2R	6200, 7300, 7400, P7400	1.0 lb.

PK76

Universal Auto-Closing Pail Shelf



Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder, built-in rag rack. Pail shelf comes with mounting hardware and instructions.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
PK76-3	Fiberglass Stepladders & Aluminum 400 Series Stepladders	2.5 lbs.

Shipping quantity
(4) units per carton

Universal Pail Shelf



Two piece, Spill-Proof®, rugged construction, aluminum arms, built-in rag rack. Pail shelf comes with mounting hardware and instructions.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
PK76-9	Fiberglass Stepladders & Aluminum 400 Series Stepladders	1.6 lbs.

Shipping quantity
(6) units per carton

76

Molded Plastic Pail Shelf



Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder. Pail shelf comes with mounting hardware and instructions.

User Installed Only

Kit No.	Fits on Fiberglass Series	Approx. Shipping Wt.
76-2	6000, 6200	2.5 lbs.

Shipping quantity
(2) units per carton

AC24

Multipurpose Project Tray



Project Tray conveniently holds tools, paints and supplies. Made for Werner multiladders and stepladders. Attaches easily; works at multiple heights; includes ToolLasso®.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC24	MT Series, M1 Series, Type IA (300 lbs.) & Type IAA (375 lbs.) Stepladders	2.8 lbs.

21

Grating Shoes



User Installed Only

Kit No.	Fits on Series	Approx. Shipping Wt.
21-20	6200, P6200, 7300, 7400, P7400, OB Series	1.5 lbs.
21-22	T6200, T7400, PT7400	1.5 lbs.

40

Casters/Bracket Kits



Heavy duty aluminum bracket with 4" castor allows 360° mobility of ladder. Soft rubber wheels are easy on floors; designed to roll over door thresholds. Casters may be used on all 4 legs; order 2 kits for this purpose. Two (2) casters/brackets come with mounting hardware and instructions.

Order models below as a "4C" for factory installation.

User Installed Only

Kit No.	Fits on Series	Approx. Shipping Wt.
40-2HD	PT370, PT6000, PT7400 (MK 4 & up)	5.0 lbs.
40-4HD	PT7400 (up through MK 3)	5.0 lbs.

Note: Fits only ladder originally equipped with casters.

EXTENSION LADDER ACCESSORIES

LADDER JACKS

Recommended for use with 300 lbs. Type IA and 375 lbs. Type IAA extension ladders (OSHA and ANSI allow use with 250 lbs. Type I extension ladders also)


User Installed Only



2-Rung Model AC10-14-02
Short Body
Accepts Stages to 14" width



2-Rung Model AC10-20-02
Long Body
Accepts Stages to 20" width




3-Rung Model AC10-20-03
Long Body
Accepts Stages to 20" width

- Lightweight, sturdy, easy to use
- Designed for quick field adjustments
- Mounts on either side of extension ladder

Kit No.	Approx. Shipping Wt.
AC10-14-02	15.0 lbs.
AC10-20-02	18.0 lbs.
AC10-20-03	20.0 lbs.

Shipping quantity
2 per unit;
(1) unit per carton



PLATFORM CLAMP SYSTEM
Clamp secures platform to ladder jacks and ties supporting ladders together to help secure entire ladder jack system

AC18MT

Platform



Slip-resistant surface. Aluminum construction. Kicks out of way for easy climbing. 300 lbs. load capacity.

User Installed Only

Kit No.	Fits on All	Approx. Shipping Wt.
AC18MT	MT Series	4.5 lbs.

ROOF BRACKETS



User Installed Only

ARB10-10 Adjustable Roof Bracket

Carton Dimensions	Approx. Shipping Wt.
4-5/8" x 19-1/2" x 14-1/4"	25.0 lbs.

Shipping quantity
(10) units per carton

FRB4510-10 Fixed Roof Bracket

Accommodates a 12/12, 45-degree roof pitch

Carton Dimensions	Approx. Shipping Wt.
9-3/8" x 18-1/4" x 9-1/4"	22.0 lbs.

Shipping quantity
(10) units per carton

AC19

Extension Ladder Covers



Helps prevent damage to support surfaces. Designed to 'snap' over extension ladder rail end caps. Resists paints, stains, thinners and solvents.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC19-2	ALL Single and Extension Fiberglass and Aluminum Ladders (except 500, D500, D7136-2, D7140-2)	1.2 lbs. each

Shipping quantity
1 pair per unit;
(6) units per carton

AC20

Paint Can Hook



Includes 2 steel hooks with can openers. Holds one gallon can. 3/16" diameter.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC20	ALL Extension Ladders	0.4 lbs. each

Shipping quantity
2 per unit;
(12) units per carton

AC22

Paint Can/ Bucket Hanger



Holds one gallon can. Easy on and off. Right or left hand use. Plated steel.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC22	ALL Extension Ladders	0.5 lbs. each

Shipping quantity
(6) units per carton

AC78

Quickclick™ Stabilizer



Span: 44", Standoff :10"
Requires no tools. Spring-loaded locking latch makes it easier and quicker to install/remove than any other stabilizer on the market. Mar-resistant rubber end caps protect work surface. Stabilizer comes with instructions. Paint can hook included.

User Installed Only

Kit No.	For use on Singles and Extensions with	Approx. Shipping Wt.
AC78	1-1/4" round rungs 1-1/2" flat rungs 1-3/4" flat rungs 1-5/8" flat rungs	6.4 lbs.

Not for use on Werner MultiLadders, Type III Aluminum or Type II Fiberglass extension ladders

Shipping quantity
(1) unit per carton

EXTENSION LADDER ACCESSORIES

AC96

Aluminum Stabilizer



Span: 47", Standoff :10"
For use on aluminum ladders of all duty ratings. Attaches in minutes. Mar-resistant rubber caps protect work surface. Paint can hook included. Comes with mounting hardware and instructions.

User Installed Only

Kit No.	Fits on	Ladder Size	Approx. Shipping Wt.
AC96	Aluminum Series Extension Ladders with rails up to 3" x 1-3/16"	ALL	4.5 lbs.
	D716	16'	
	D1100	ALL	
	D1200	ALL	
	D1300	ALL	
	D1500	ALL	
	D500	20' - 24'	
	MT	ALL	
	M1	ALL	

Ideal for stabilizing M1 MultiLadder when in scaffold or stairway positions

Shipping quantity
(6) units per carton

PK70-1/APK70

Leveler with Base Units



LevelLok® Ladder Leveler with 2 base attachments. Base unit stays attached to the ladder while leveler can be easily removed when not in use. Swivel shoe with ice pick on both ends. Leveler can be used on either side of ladder. Provides 8-1/2" of travel.

LevelLok® is a registered trademark of the LevelLok Corporation.

User or Factory Installed

Kit No.	Fits on All	Approx. Shipping Wt.
PK70-1 and APK70	MT Series, D7100, D6200, 7100, D1300, D1500, 7800	8.5 lbs.

PK70-2

Leveler Base Units



LevelLok® Ladder Leveler 2 base attachments. Base units attach to the ladder to be used with LevelLok® Leveler supplied with PK70-1.

LevelLok® is a registered trademark of the LevelLok Corporation.

User Installed Only

Kit No.	Fits on All	Approx. Shipping Wt.
PK70-2	MT Series, D7100, D6200, 7100, D1300, D1500, 7800	3.2 lbs.

PK70-3

Leveler



LevelLok® Ladder Leveler attaches to the base units supplied with PK70-1 and PK70-2.

LevelLok® is a registered trademark of the LevelLok Corporation.

Approximate Shipping Weight

6.2 lbs.

PK80/APK80

Level-Master® Automatic Ladder Levelers



Easily attaches to Werner fiberglass and aluminum extension ladders to level ladder on uneven surfaces.

Automatically adjusts up to 8-1/2". Easily levels and locks securely in place. The width of the ladder is increased by approximately 3-3/4". Note: The ladder's duty rating will remain the same after proper installation of leveler. Two (2) ladder levelers (one for each ladder rail) come with mounting hardware and instructions.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size
PK80-2 & APK80	D5900, D6000, D6200, 7100, D7100	ALL ALL ALL ALL

Kit No.	Fits on Aluminum Series	Ladder Size
PK80-2 & APK80	D1100, D1200, D1300, D1500, D500	ALL ALL ALL

Note: The original shoes of a D1500 series ladder may replace the steel shoes on a model PK80-2.

Approx. Shipping Weight

9.5 lbs.


Approx. Added Weight to Ladder for Factory Install

6.5 lbs.

Shipping quantity
(1) unit per carton

A61

Combination Spur-Hoop Shoe



Combination aluminum rail shield bracket and spur-hoop shoe assembly.

Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A61	D6200-2, 7100-2, D7100-2	16' - 32' ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install

3.0 lbs.

A62

Flange Guards



Black plastic guards prevent damage to ladder rails.

Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A62	7100-2, 7200-2, D7100-2, D7200-2, D8100-2	16' - 32' ALL 16' - 32' ALL ALL

Approx. Added Weight to Ladder for Factory Install

4.0 lbs.

64-2

Shoulder Rest



Foam cushion designed to make carrying ladder more comfortable. Ideally placed at the ladder's balance point

User Installed Only

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
64-2	D6200-2 D6400-2 7100-1 D7100-2	ALL ALL 16' - 32'	0.06 lbs.
	7100-2 D7200-2 D8100-2	ALL ALL ALL	

66-1/A66-1

Reflective Tape



Highly reflective tape to add visibility to ladders. User-installed kit includes two 12" strips.

User or Factory Installed

Kit No.	Fits on	Approx. Shipping Wt.
66-1	All Ladders	0.04 lbs.

Factory Install No.	Fits on	Ladder Size
A66-1	All Ladders	ALL

71/A71

Padded Fixed V-Rung



Slip-resistant rubber grip attached to steel v-rung for wood, metal or concrete poles. Pre-pierced holes in fiberglass top rails are provided to accept this accessory. V-rung assembly comes with mounting hardware and instructions.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size
71-1	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'
	7800	ALL
71-4	D6200-1 7100-1	ALL Up to 16'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A71	D6200-1 D6200-2 7100-1 7100-2 D7100-2	ALL ALL Up to 16' ALL 16' - 32'
	7800	ALL

Approx. Shipping Weight	
71-1:	1.5 lbs.
71-4:	2.0 lbs.
Approx. Added Weight to Ladder for Factory Install	
1.4 lbs.	

72/A72

Adjustable Pole Strap



Adjustable strap design for all diameter poles. Slip-resistant rubber grip stitched to strap. Strap assembly comes with mounting hardware and instructions.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
72-2	D6200-2 7100-2 D7100-2	ALL Up to 16' 16' - 32'	1.3 lbs.
72-1	D6200-1 7100-1	ALL Up to 16'	1.3 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A72	D6200-2 7100-1 7100-2 D7100-2	ALL Up to 16' ALL 16' - 32'

74/A74

Cable Hooks



Easily folds within side rails for storage. Cable hooks can be mounted above or below top rung. Consult Werner if using in conjunction with other accessories. Cable hooks come with mounting hardware and instructions.


User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
74-1	D6200-2 7100-1 7100-2 D7100-2	ALL Up to 16' ALL 16' - 32'	2.6 lbs.
74-2	D7100-2	36' - 40'	2.6 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A74	D7100-2	ALL

A78

Fly Section Shoes with Quick Disconnect



Combination aluminum rail shield bracket and hoop shoe with corrugated slip-resistant extruded rubber pad on fly section, allows use as a single or manhole ladder assembly.

Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A78	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install	
1.5 lbs.	

EXTENSION LADDER ACCESSORIES

81/A81

Adjustable Pole Lashes



For use with ladders having hoop style end caps only. Adjustable strap design for all diameter poles. Adjustable pole lash comes with mounting hardware and instructions.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
81-3	D7100-2	36' - 40'	1.5 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A81	D6200-2 7100-1 7100-2 D7100-2	ALL ALL ALL ALL

A82

Red Rungs



Set of 3 painted red rungs for fiberglass extension ladders. Available for rung-plate models only.

Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A82-1	D7100-2 D7200-2 D8100-2	16' - 32' 16' - 32' ALL
A82-2	D7100-2	ALL
A82-3	D7100-2	36' - 40'

A83

Rubber Padded Shoe



Aluminum protective rail shield and rubber padded foot. Comes with two (2) padded shoes.

Factory Installed Only

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A83	D6200-1 D6200-2 7100-1 7100-2 D7100-2	ALL 16' - 32' Up to 16' ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install
2.2 lbs.

86/A86

Spur Shoe



Plated steel spur for use on penetrable surfaces. Two (2) spur shoe assemblies, mounting hardware and instructions included.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size
86-1	D6200-2 7100-2, D7100-2 7100-1	16' - 32' 16' - 32' Up to 16'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A86	D6200-1 D6200-2 7100-1 7100-2 D7100-2	ALL 16' - 32' Up to 16' ALL 16' - 32'

Approx. Shipping Weight
2.5 lbs.
Approx. Added Weight to Ladder for Factory Install
2.0 lbs.

89

Rail Wear Sleeves




3' long replaceable plastic sleeves help avoid manhole rim damage to ladder rails. Two (2) sleeves, mounting hardware and instructions included.

User Installed Only

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
89-1	M7100-1 7100-1	ALL Up to 16'	2.5 lbs.

91

Adjustable Pole Lash Assembly with Angle Brackets



This assembly comes with brackets for independent use; wraps around pole. Strap design for all diameter poles. Adjustable pole lash assembly comes with two (2) angle brackets, mounting hardware and instructions.

User Installed Only

Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
91-2	D6200-2 7100-2 D7100-2	ALL ALL 16' - 32'	2.0 lbs.

92/A92

Cable Hook and V-Rung Assembly



Functions as both cable hook and v-rung. For use in applications where the diameter of the pole at the point of support does not exceed 10". Steel v-rung has rubber pad for slip-resistant performance. One (1) cable hook and v-rung assembly, mounting hardware and instructions included.

User or Factory Installed

Kit No.	Fits on Fiberglass Series	Ladder Size
92-88	D6200-2 D8200-2EQ	16' - 40' 20' - 28'
92-89	7100-2, D7100-2 D7100-2LV	16' - 32' 20' - 32'
92-91	7100-1	8' - 16'
92-92	D6200-3	16' - 32'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A92	D6200-2 D6200-3 7100-2 7100-1 D8200-2EQ D7100-2 D7100-2LV	ALL ALL ALL 8' - 16' ALL 16' - 32' 20' - 32'

Approx. Shipping Weight
4.0 lbs.
Approx. Added Weight to Ladder for Factory Install
3.0 lbs.

94

Ladder-Cinch™



Use as a quick tie down. Strap designed for all diameter poles. One (1) Ladder-Cinch™ assembly, storage bag and instructions.

User Installed Only

Kit No.	Fits All	Ladder Size	Approx. Shipping Wt.
94-2	Fiberglass Series Extension Ladders	ALL	1.0 lbs.

97P

Adjustable True Grip® Stabilizer and Surface Protectors



Span adjustment : 49", 57" or 65"
Stand-off distance: 12" or 29-1/2"
Rectangular stabilizer spans double windows. Quickly converts stand off distance for larger overhangs. Mounts quickly and easily. This comes with one (1) stabilizer, rubber pads, fleece bonnets, mounting hardware and instructions.

- Fits rail up to 3" x 1-3/16"

User Installed Only

Kit No.	Fits on Aluminum Series	Ladder Size
97P	D716-2	16'
	D1100	ALL
	D1200	ALL
	D1300	ALL
	D1500	ALL
	D500-2	20' - 24'
	D1700-2EQ	ALL
	D1800-2EQ	ALL

Note: Not to be used on Multi-Ladders

Approx. Shipping Weight
9.5 lbs.

AC59

Attic Ladder Installation and Trim Kit



This kit includes temporary support boards, shims and fasteners for installing your attic ladder. Once installed, this kit also included mitered trim boards to improve the attic ladder's appearance.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
AC59	ALL Attic Ladders	8.25 lbs. each

36-82

Attic Ladder Assist Pole



3' assist pole allow easy access and smooth opening of attic ladder door.

User Installed Only

Kit No.	Fits on	Approx. Shipping Wt.
36-82	ALL Attic Ladders	3.0 lbs. each



SERIES/MODEL	STYLE	PAGE
150B	Aluminum Step Stool	31
21	Grating Shoes	64
22	Fiberglass Rail Shields	64
244	Aluminum Utility Ladder	33
260	Aluminum Platform Ladder	33
2000	1-Person Decorator Plank	50
2300	2-Person Scaffold Plank	50
2400	2-Person Scaffold Plank	50
2500	2-Person Stage Platform	50
2600	2-Person Stage Platform	50
2700	2-Person Stage Platform	50
36-82	Attic Ladder Assist Pole	69
37	Display Rack	60
350	Aluminum Stepladder	32
360	Aluminum Stepladder	32
370	Aluminum Stepladder	28
3100	3-Person Stage Platform	50
3200	3-Person Stage Platform	50
40-1	Swivel Locking Caster	55
41-1	Swivel Base Plate	55
43-1	Guard Rail Holder	55
400	Aluminum Stepladder	27
4100	Narrow Span Scaffold Sections	54
4100-12	Narrow Span Scaffold Tower 12' Platform Height	53
4100-18	Narrow Span Scaffold Tower 18' Platform Height	53
4100-23	Narrow Span Scaffold Tower 23' Platform Height	53
4200	Wide Span Scaffold Sections	54
4200-12	Wide Span Scaffold Tower 12' Platform Height	53
4200-18	Wide Span Scaffold Tower 18' Platform Height	53
4200-23	Wide Span Scaffold Tower 23' Platform Height	53
55	End Cap Display	60
500-1	Aluminum Round Rung Straight Ladder	35
560-3	Aluminum Round Rung Extension Ladder	36
5300	Plywood Decked Aluma-Plank™	47
5500	Aluminum Decked Aluma-Plank™	47
5600	2-Piece Extruded Aluma-Board™	47
5900	Fiberglass Stepladder	11
6000	Fiberglass Stepladder	10
6002	Fiberglass Step Stool	9
6100	Fiberglass Stepladder	9
6200	Fiberglass Stepladder	6
6202	Fiberglass Step Stool	8
64-2	Shoulder Pad	67
66-1/A66-1	Reflective Tape	67
71/A71	Padded Fixed V-Rung	67
72/A72	Adjustable Pole Strap	67
74/A74	Cable Hooks	67
76	Molded Plastic Pail Shelf	64
7100	Fiberglass Round Rung Extension/Straight Ladder	19
7200-2	Fiberglass Round Rung Lightweight Extension Ladder	20
7300	Fiberglass Stepladder	5

SERIES/MODEL	STYLE	PAGE
7400	Fiberglass Stepladder	1
7800	Fiberglass Combination Step/Extension Ladder	24
81/A81	Adjustable Pole Lashes	68
86/A86	Spur Shoe	68
89	Rail Wear Sleeves	68
91	Adjustable Pole Lash Assembly with Angle Brackets	68
92/A92	Cable Hook and V-Rung Assembly	68
94	Ladder-Cinch™	69
97P	Adjustable True Grip® Stabilizer and Surface Protectors	69
9500	All-Fiberglass Extension Ladder/Single Ladder	25
A61	Combination Spur-Hoop Shoe	66
A62	Flange Guards	66
A78	Fly Section Shoes with Quick Disconnect	67
A82	Red Rungs	68
A83	Rubber Padded Shoe	68
AA	Aluminum Compact Attic Ladder	42
AC10-14-02	2-Rung Short Body Ladder Jack	65
AC10-20-02	2-Rung Long Body Ladder Jack	65
AC10-20-03	3-Rung Long Body Ladder Jack	65
AC11	Stepladder Hanger	64
AC18MT	Platform	65
AC19	Extension Ladder Covers	65
AC20	Paint Can Hook	65
AC22	Paint Can/Bucket Hanger	65
AC24	Multipurpose Project Tray	66
AC27-L	Lock-In Paint Cup Liner	62
AC27-P	Lock-In Paint Cup	62
AC50-JB-3	Lock-In Job Bucket	62
AC52-UB	Lock-In Utility Bucket	63
AC54-JC	Lock-In Job Caddy	63
AC56-UH	Lock-In Utility Hook	63
AC58-TL	Lock-In ToolLasso®	63
AC59	Attic Ladder Installation and Trim Kit	69
AC78	Quickclick™ Stabilizer	65
AC96	Aluminum Stabilizer	66
AH	Aluminum Universal Attic Ladder	42
AP	Aluminum Work Platforms	45
ARB10-10	Adjustable Roof Bracket	65
BD	Scaffold Diagonal Brace	55
BH	Scaffold Horizontal Brace	55
BN	Scaffold Narrow Span Horizontal-Diagonal Brace	55
BOR	Scaffold Outrigger Brace	55
BW	Scaffold Wide Span Horizontal-Diagonal Brace	55
D1100	Aluminum D-Rung Extension Ladder	39
D1200-2	Aluminum D-Rung Extension Ladder	38
D1200-3	Aluminum D-Rung Compact Extension Ladder	38
D1300	Aluminum D-Rung Extension Ladder	37
D1500	Aluminum D-Rung Extension Ladder/Straight Ladder	36
D1700-2EQ	Aluminum Extension Ladder with Integrated Leveling	37
D1800-2EQ	Aluminum Extension Ladder with Integrated Leveling	37
D500-2	Aluminum Flat Rung Extension Ladder	35

SERIES/MODEL	STYLE	PAGE
D5900	Fiberglass D-Rung Extension Ladder	22
D6000	Fiberglass D-Rung Extension Ladder	22
D6200-2	Fiberglass D-Rung Extension Ladder/Straight Ladder	21
D6200-3	Fiberglass D-Rung Compact Extension Ladder	21
D6400-2	Fiberglass D-Rung Lightweight Extension Ladder	20
D716-2	Aluminum D-Rung Extension Ladder	39
D7100-2	Fiberglass D-Rung Extension Ladder	18
D7100-2LV	Fiberglass D-Rung Ext. Ladder w/ Integrated Leveling	18
D7200-2	Fiberglass D-Rung Lightweight Extension Ladder	20
D8200-2EQ	Fiberglass Extension Ladder with Integrated Leveling	19
DP6206	Fiberglass Dual-Purpose 2-IN-1 6' Ladder	17
DP6207	Fiberglass Dual-Purpose 2-IN-1 7' Ladder	17
DP6208	Fiberglass Dual-Purpose 2-IN-1 8' Ladder	17
E7400	Fiberglass Extension Trestle Ladder	3
ERT-N	End Rail and End Toe Board Assembly - Narrow	51
ERT-W	End Rail and End Toe Board Assembly - Wide	51
FNB-80	Scaffold Base End Frame	55
FNU	Scaffold Frames	55
FRB4510-10	Fixed Roof Bracket	65
FRO	Scaffold Rolling Outrigger Frame	55
FTP6200	Fiberglass Tripod Stepladder	7
FWB-80	Scaffold Base End Frame	55
FWG-42	Scaffold Guard Rail End Frame	55
FWU	Scaffold Frames	55
L6200	LEANSAFE™ Ladder	13
M1	Aluminum Folding MultiLadder	41
M7100	Fiberglass Manhole Ladder	24
MT	Aluminum Telescoping MultiLadder	41
OBCN00	Fiberglass Old Blue® Series Contractor's Jobstation™	4
OBEL00	Fiberglass Old Blue® Series Electrician's Jobstation™	4
OR-ADU	Scaffold Knee-Type Outriggers	55
P22W	Scaffold Board	55
P370	Aluminum Platform Ladder	30
P400	Aluminum Platform Ladder	28
P6200	Fiberglass Platform Ladder	7
P7400	Fiberglass Platform Ladder	2
PA200	Aluminum Extension Plank	47
PD22W	Scaffold Wood Deck with Access Door	55
PD6200	Podium Ladder	15
PD7300	Podium Ladder	15
PJ-6P	Aluminum Pump Jack 6' Aluminum Pole	48
PJ-12P	Aluminum Pump Jack 12' Aluminum Pole	48
PJ-18P	Aluminum Pump Jack 18' Aluminum Pole	48
PJ-24P	Aluminum Pump Jack 24' Aluminum Pole	48
PJ-100	Aluminum Pump Jack	48
PJ-ERN	Aluminum Pump Jack End Rail Kit (narrow)	48
PJ-ERW	Aluminum Pump Jack End Rail Kit (narrow)	48
PJ-PC	Aluminum Pump Jack Pole Connector	48
PJ-PF-4	Aluminum Pump Jack Pole Foot	48
PJ-SBF	Aluminum Pump Jack Foldable Support Brace	48
PJ-SBR	Aluminum Pump Jack Rigid Support Brace	48

SERIES/MODEL	STYLE	PAGE
PJ-SN	Aluminum Pump Jack Safety Net	48
PJ-WB	Aluminum Pump Jack Work Bench	48
PK70-1/APK70	Ladder Leveler with Base Units	66
PK70-2	Ladder Leveler Base Units	66
PK70-3	Ladder Leveler	66
PK76	Universal Pail Shelf	64
PK80/APK80	Level-Master® Automatic Ladder Levelers	66
PS-48	Steel Portable Scaffold	46
PT370	Aluminum Stocker's Ladder®	30
PT6000	Fiberglass Stocker's Ladder®	11
PT7400	Fiberglass Stocker's Ladder®	3
R102	Straight Ramp Kit	58
R301	Straight Ramps	58
R402	Arched Ramps	57
R522	Folding Arched Ramps	57
S7700	Fiberglass Interchangeable Parallel Sectional Ladder	26
S7900	Fiberglass Interchangeable Tapered Sectional Ladder	25
SGR-09	1-1/2" Square Guard Rail Cut Length - 108"	51
SGR-13	1-1/2" Square Guard Rail Cut Length - 156"	51
SH378	Aluminum Shelf Ladder	30
SNB	Snap-Up® Narrow Span Folding Scaffolds	54
SPF00	Fiberglass Posting Ladder	26
SPJ-100	Steel Pump Jack	49
SPJ-GRH	Steel Pump Jack Guard Rail Holder	49
SPJ-PA-4	Steel Pump Jack Pole Anchor	49
SPJ-SBF	Steel Pump Jack Foldable Support Brace	49
SPJ-WB	Steel Pump Jack Work Bench/Guard Rail Holder	49
SRS-72 & Accessories	6' Steel Rolling Scaffold	46
SSA00	Aluminum Step Stand	31
SSF00	Fiberglass Step Stand	8
SSP-47	Stanchion Post Assembly	51
STB-09	3-1/2" Toe Board Cut Length - 108"	51
STB-13	3-1/2" Toe Board Cut Length - 156"	51
SWB	Snap-Up® Wide Span Folding Scaffolds	54
T370	Aluminum Multi-Use Twin Stepladder	29
T372	Aluminum Twin Step Stool	31
T400	Aluminum Multi-Use Twin Stepladder	27
T6000	Fiberglass Multi-Use Twin Stepladder	10
T6200	Fiberglass Twin Stepladder	6
T6202	Fiberglass Twin Step Stool	8
T7400	Fiberglass Multi-Use Twin Stepladder	2
TN4A	Aluminum Toe Board Assemblies for 4100 Series	55
TPF00	Fiberglass Posting Ladder	26
TR401-S	Steel Removable Pickup Truck Rack	59
TW370-30	Aluminum Portable Work Stand	31
TW4A	Aluminum Toe Board Assemblies for 4200 Series	55
TW6200	Fiberglass Portable Work Stand	8
VR401-W	Steel Van Rack	60
W	Wood Folding Attic Ladder	43
WH	Wood Folding Heavy Duty Attic Ladder	43
WNS	Nestable Stage	48



U.S. HEADQUARTERS
Werner Co.
93 Werner Road
Greenville, PA 16125-9499

To contact us, please visit:
wernerco.com