

FALL PROTECTION



ACCESS A HIGHER STANDARD.™





TABLE OF CONTENTS

WERNER FALL PROTECTION

TOTAL JOBSITE SOLUTIONS3

THE WERNER PRODUCT PROMISE 4-5

HARNESSES 6-21

 WERNER HARNESSES BRANDS 6-7

 CHOOSING A HARNESSES7-9

 PROFORM F3..... 10-11

 BLUE ARMOR 12-15

 LITEFIT 16-17

 BASEWEAR..... 18

 ARC FLASH AND HI-VIZ..... 19

 HARNESSES ACCESSORIES20

 DROP SAFETY EQUIPMENT.....21

SELF RETRACTING LIFELINES 22-29

 WERNER SRL BRANDS22

 MAX PATROL..... 23-24

 BASELINE25

 BANTAM 26-27

 AUTOCOIL 2 28-29

LANYARDS 30-35

 WERNER LANYARD BRANDS..... 30-31

 DECOIL 32-33

 SOFT COIL34

 ARC FLASH34

 POSITIONING 35

ANCHORS 36-38

 I-BEAM/STEEL.....36

 CONCRETE..... 37

 ROOF AND TIE-OFF STRAP38

LIFELINES 39-40

WERNER KITS 41-45

 URMARK KITS41

 COMPLIANCE KITS42

 RESCUE LADDER SYSTEM43

 TRAUMA STRAPS43

 TRIPOD SYSTEM..... 44-45

WERNER SAFETY TRAINING46

ANSI/ASSE CODES47

SOLUTIONS FOR SAFE ACCESS AT ANY HEIGHT

We've built a reputation for excellence in workplace safety. It's based on experience satisfying the tough demands of the experienced pro. At Werner, we know what professionals need and want. We make it our charge to deliver it.

Our new line of fall protection equipment extends from that same philosophy that has made our ladders preferred by professionals. We begin with The Werner Product Promise that establishes our design and ensures satisfaction – before, during and after use. We have developed built-in INSPECT!™ and WebAlert features that make inspection quicker and easier for users, which makes assuring safety easier.

Whether it's ladders or fall protection equipment, everything we make is known for its durability and is able to withstand the harshest of working conditions. Our innovative features also add an extra edge for both safe use and reliable performance.

We are committed to maintaining tight controls in all phases of manufacturing. In fall protection, you can see it in our new in-house sewing operations for harnesses and lanyards. World-class distribution and excellent customer care reinforce our efforts. We are proud of what our brand represents and proud that we can now deliver safety needs at any height.



VISUAL INSPECTION AID



WebAlert inspectable polyester webbing makes inspection easier by making wear and damage visible and obvious

POST-FALL ADJUSTMENT



Achieve gravity override in seconds, relieving the pressure on femoral arteries.

THE WERNER PRODUCT PROMISE

Must offer inspectability
to indicate wear or
damage prior to use

INSPECTABILITY

Must be adjustable to
accommodate most body frames
to ensure comfort and productivity
with or without tools

ADJUSTABILITY



Must perform safely
in the event of a fall

PERFORMANCE



Must be able to be
manipulated in a post-fall
condition to eliminate pain,
pressure points and improve
ability to assist in a rescue

MANIPULATION





1

ANCHORAGE/ANCHORAGE CONNECTORS

Static/Fixed Anchor Points (Not Shown)

Horizontal Lifelines

Must support 5,000 lbs.

SELECT PRODUCT THAT MATCHES APPLICATION

2

CONNECTION DEVICE

Fall Arrest (free falling up to 6 ft.)

SELF RETRACTING LIFELINES (6' - 60')

LANYARDS (SINGLE OR TWINLEG)

ROPES/GRABS (MANUAL OR TRAILING)

Fall Restraint (no fall potential)

LANYARDS (SINGLE OR TWINLEG)

ROPES/GRABS (MANUAL)

3

HARNESSES

Standard

Climbing

Positioning

Retrieval

Construction

HARNESSES BRANDS



PROFORM[™]F3

FUNCTION | FIT | FREEDOM

Werner ProForm F3 harnesses are athletically styled and constructed with lightweight materials to deliver maximum comfort and unrelenting safety performance. In the event of a Fall, simply pull the patented Relief Cords to deploy the built-in seat and achieve the Gravity Override position, reducing the potential hazards of suspension trauma. ProForm F3 delivers Function, Fit and Freedom through the relief cords, dual back pad system, WebAlert2 inspectable webbing, integrated SRL bumper, cam torso adjustment, and all aluminum hardware. 400 lb. Rated.



Blue Armor[™]

INSPECTABLE HARNESS

Werner Blue Armor harnesses are designed and manufactured for the most demanding applications and the most serious professional workers. 400lb. rated. In the event of a fall, simply pull the patented Relief Handles to achieve the Gravity Override position, reducing the potential hazards of suspension trauma. They combine safety features, comfort and durability for the highest levels of application. Unique wear-indicating webbing and impact indicators allow for easy inspection, 5-point adjustability deliver optimal fit, and bright colors improve worker visibility.



LITEFIT[™]

SAFETY HARNESS

The Werner Litefit line provides the right harness, the right fit, and the right value. 310lb. rated. In the event of a fall, simply pull the patented Relief Handles to achieve the Gravity Override position, reducing the potential hazards of suspension trauma. These harnesses offer full adjustability for fit, comfort, and convenience, lightweight and durable hardware, and bright colors for enhanced visibility.



BASEWEAR[™]

SAFETY HARNESS

The Werner BaseWear line provides compliant fall protection at an economical value. 310lb. rated. These harnesses promote all day wear with lightweight design and Universal sizing.

KNOW YOUR HARNESS

How to choose the correct harness for the job

WEBBING

The webbing is the skeleton of the harness and must have the strength and durability to satisfy fall protection needs in demanding job environments.



LANYARD KEEPERS

The lanyard keeper provides a safe place to park a lanyard not in use and also reduces the likelihood of tripping on or snagging the lanyard.



STRAP KEEPERS

When properly adjusted and fit to a user, a harness may have extra webbing strap hanging out of the various buckles. Simple strap keepers allow the user to organize and store this extra strap to improve comfort and prevent snagging.

ALTERNATE ATTACHMENT HARDWARE

Different harnesses have additional D-Rings for specific applications: near the hips, on the chest, or on the shoulders.



SUB-PELVIC STRAP

When properly positioned, the sub-pelvic straps help to distribute force and weight during and after a fall.





BACK/SHOULDER PAD WITH DORSAL BACK D-RING

Cushioning on the back and shoulders helps distribute pressure, improving users' comfort.



LABELS

Harness labels include important product information and provide a place to record inspection data. Labels must be protected from wear and damage; legibility is critical.



IMPACT INDICATORS

Any harness exposed to a fall should be removed from service. These indicators provide instant evidence whether or not a fall has occurred.

ADJUSTMENT LOCATIONS

For optimal comfort and performance in a fall event, a harness must be properly adjusted and fit on the user. All areas of the harness should be snug, but not overly tight. Most harnesses have adjustments for the torso/shoulder straps, chest straps, and leg straps.

LEG STRAPS

Leg straps fasteners come in different styles, including pass through buckles, tongue buckles, and quick connect buckles.



Pass through



Tongue Buckle



Quick Connect

HARNESSES STYLES



STANDARD

For fall arrest only, features only a dorsal D-Ring on the back.



CLIMBING

For climbing applications and attachment to fixed ladder safety systems, these harnesses include a frontal attachment point.



POSITIONING

These harnesses have D-Rings located at the hips for use with positioning lanyards to allow for hands-free working in vertical structure applications



RETRIEVAL


D-rings on the shoulders are used for lifting or lowering a user, typically in confined space or rescue applications



CONSTRUCTION STYLE (positioning with belt)

Construction harnesses feature belts and additional attachment points for a variety of applications. The belt allows users to carry tools, and additional padding improves user comfort.

HARNESSES SIZE CHART

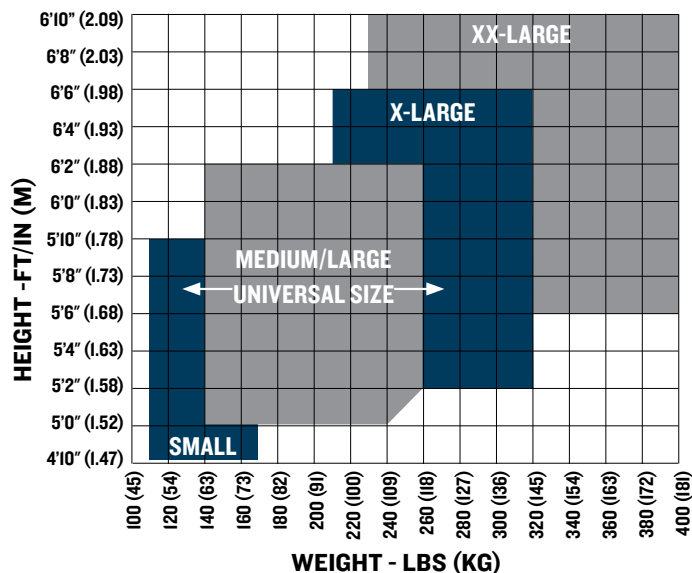



LABEL PACK & PROTECTION

Keeps product labels protected from the elements and allows for personalization



DUAL BACK PAD SYSTEM

Dual back pad system provides cooling airflow and breathability and can be repositioned after a fall to reduce pressure on the clavicle




IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall



SRL BUMPER

Integrated SRL bumper protects the lower back when wearing personal SRL's



WebAlert™2 INSPECTABLE WEBBING

WebAlert 2 is red inside to identify damaged webbing, resistant to cuts, and has a weather resistant coating



GEAR LOOPS

Allows connection of tool lanyards to secure tools



400 LB. RATED

Werner ProForm F3 harnesses are athletically styled and constructed with lightweight materials to deliver maximum comfort and unrelenting safety performance.

ProForm F3 delivers function, fit and freedom through the relief cords, dual back pad system, WebAlert™2 inspectable webbing, integrated SRL bumper, cam torso adjustment, and all aluminum hardware.

PATENTED RELIEF CORD POST-FALL ADJUSTMENT SYSTEM



Achieve gravity override in seconds, relieving the pressure on femoral arteries.

Standard Harness

Back D-Rings, Tongue Buckle Legs (shown)



- SMALL**
H013001 Quick Connect Legs
H012001 Tongue Buckle Legs
- MEDIUM/LARGE**
H013002 Quick Connect Legs
H012002 Tongue Buckle Legs
- X-LARGE**
H013004 Quick Connect Legs
H012004 Tongue Buckle Legs
- XX-LARGE**
H013005 Quick Connect Legs
H012005 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Quick Connect Legs (shown)



- SMALL**
H023001 Quick Connect Legs
H022001 Tongue Buckle Legs
- MEDIUM/LARGE**
H023002 Quick Connect Legs
H022002 Tongue Buckle Legs
- X-LARGE**
H023004 Quick Connect Legs
H022004 Tongue Buckle Legs
- XX-LARGE**
H023005 Quick Connect Legs
H022005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Quick Connect Legs (shown)



- SMALL**
H033001 Quick Connect Legs
H032001 Tongue Buckle Legs
- MEDIUM/LARGE**
H033002 Quick Connect Legs
H032002 Tongue Buckle Legs
- X-LARGE**
H033004 Quick Connect Legs
H032004 Tongue Buckle Legs
- XX-LARGE**
H033005 Quick Connect Legs
H032005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest and Hip D-Rings, Quick Connect Legs (shown)



- SMALL**
H063001 Quick Connect Legs
H062001 Tongue Buckle Legs
- MEDIUM/LARGE**
H063002 Quick Connect Legs
H062002 Tongue Buckle Legs
- X-LARGE**
H063004 Quick Connect Legs
H062004 Tongue Buckle Legs
- XX-LARGE**
H063005 Quick Connect Legs
H062005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Quick Connect Legs (shown)



- SMALL**
H033101 Quick Connect Legs
H032101 Tongue Buckle Legs
- MEDIUM/LARGE**
H033102 Quick Connect Legs
H032102 Tongue Buckle Legs
- X-LARGE**
H033104 Quick Connect Legs
H032104 Tongue Buckle Legs
- XX-LARGE**
H033105 Quick Connect Legs
H032105 Tongue Buckle Legs



Climbing/Construction Harness


Back, Chest and Hip D-Rings, Quick Connect Legs (shown)



- SMALL**
H063101 Quick Connect Legs
H062101 Tongue Buckle Legs
- MEDIUM/LARGE**
H063102 Quick Connect Legs
H062102 Tongue Buckle Legs
- X-LARGE**
H063104 Quick Connect Legs
H063104 Tongue Buckle Legs
- XX-LARGE**
H063105 Quick Connect Legs
H062105 Tongue Buckle Legs



INSPECTABLE HARNESS




**WebAlert™
INSPECTABLE WEBBING**
WebAlert webbing makes wear or damage clearly visible.



BACK PAD
Improves user comfort



**WEB TERMINATIONS
STRAP KEEPERS**
Keeps excess webbing organized and out of the way



**QUICK CONNECT
CHEST BUCKLE**
Provides fast and easy connection



IMPACT INDICATOR
Clearly shows if the harness has been involved in a fall




LABEL PROTECTION
Durable cover easily reveals labels



400 LB. RATED

Blue Armor comes with Legs Straps with fast, easy, quick connect buckles or tongue buckles, ideal when multiple workers use same harness and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.



It has a lightweight compression comfort back pad with breathable, sweat absorbing foam helps keep the harness untangled when donning.

The patent pending Relief Handle will achieve gravity override in seconds.

PATENT PENDING **RELIEF HANDLE** POST-FALL ADJUSTMENT SYSTEM



Achieve gravity override in seconds, relieving the pressure on femoral arteries.

Standard Harness

Back D-Ring, Quick Connect Legs (shown)



SMALL

H113001 Quick Connect Legs
H112001 Tongue Buckle Legs

MEDIUM/LARGE

H113002 Quick Connect Legs
H112002 Tongue Buckle Legs

X-LARGE

H113004 Quick Connect Legs
H112004 Tongue Buckle Legs

XX-LARGE

H113005 Quick Connect Legs
H112005 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Quick Connect Legs (shown)



SMALL

H123001 Quick Connect Legs
H122001 Tongue Buckle Legs

MEDIUM/LARGE

H123002 Quick Connect Legs
H122002 Tongue Buckle Legs

X-LARGE

H123004 Quick Connect Legs
H122004 Tongue Buckle Legs

XX-LARGE

H123005 Quick Connect Legs
H122005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H133001 Quick Connect Legs
H132001 Tongue Buckle Legs

MEDIUM/LARGE

H133002 Quick Connect Legs
H132002 Tongue Buckle Legs

X-LARGE

H133004 Quick Connect Legs
H132004 Tongue Buckle Legs

XX-LARGE

H133005 Quick Connect Legs
H132005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H163001 Quick Connect Legs
H162001 Tongue Buckle Legs

MEDIUM/LARGE

H163002 Quick Connect Legs
H162002 Tongue Buckle Legs

X-LARGE

H163004 Quick Connect Legs
H162004 Tongue Buckle Legs

XX-LARGE

H163005 Quick Connect Legs
H162005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tool Belt, Quick Connect Legs (shown)



SMALL

H133101 Quick Connect Legs
H132101 Tongue Buckle Legs

MEDIUM/LARGE

H133102 Quick Connect Legs
H132102 Tongue Buckle Legs

X-LARGE

H133104 Quick Connect Legs
H132104 Tongue Buckle Legs

XX-LARGE

H133105 Quick Connect Legs
H132105 Tongue Buckle Legs



Retrieval Harness

Back and Shoulder D-Rings, Quick Connect Legs (shown)



SMALL

H143001 Quick Connect Legs
H142001 Tongue Buckle Legs

MEDIUM/LARGE

H143002 Quick Connect Legs
H142002 Tongue Buckle Legs

X-LARGE


H143004 Quick Connect Legs
H142004 Tongue Buckle Legs

XX-LARGE

H143005 Quick Connect Legs
H142005 Tongue Buckle Legs



INSPECTABLE HARNESS



WebAlert™ INSPECTABLE WEBBING

WebAlert webbing makes wear or damage clearly visible.




BACK PAD

Improves user comfort



WEB TERMINATIONS STRAP KEEPERS

Keeps excess webbing organized and out of the way



PASS THROUGH CHEST BUCKLE

Easy and fast adjustment and fastening



IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall




LABEL PROTECTION

Durable cover easily reveals labels



400 LB. RATED

Blue Armor comes with Legs Straps with fast, easy, quick connect buckles or tongue buckles, ideal when multiple workers use same harness and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.



It has a lightweight compression comfort back pad with breathable, sweat absorbing foam helps keep the harness untangled when donning.

The patent pending Relief Handle will achieve gravity override in seconds.

PATENT PENDING RELIEF HANDLE POST-FALL ADJUSTMENT SYSTEM



Achieve gravity override in seconds, relieving the pressure on femoral arteries.

Standard Harness

Back D-Ring, Pass Through Legs (shown)



SMALL

H211001 Pass Through Legs
H212001 Tongue Buckle Legs

MEDIUM/LARGE

H211002 Pass Through Legs
H212002 Tongue Buckle Legs

X-LARGE

H211004 Pass Through Legs
H212004 Tongue Buckle Legs

XX-LARGE

H211005 Pass Through Legs
H212005 Tongue Buckle Legs

XXX-LARGE

H212006 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Pass Through Legs (shown)



SMALL

H221001 Pass Through Legs
H222001 Tongue Buckle Legs

MEDIUM/LARGE

H221002 Pass Through Legs
H222002 Tongue Buckle Legs

X-LARGE

H221004 Pass Through Legs
H222004 Tongue Buckle Legs

XX-LARGE

H221005 Pass Through Legs
H222005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H231001 Pass Through Legs
H232001 Tongue Buckle Legs

MEDIUM/LARGE

H231002 Pass Through Legs
H232002 Tongue Buckle Legs

X-LARGE

H231004 Pass Through Legs
H232004 Tongue Buckle Legs

XX-LARGE

H231005 Pass Through Legs
H232005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H261001 Pass Through Legs
H262001 Tongue Buckle Legs

MEDIUM/LARGE

H261002 Pass Through Legs
H262002 Tongue Buckle Legs

X-LARGE

H261004 Pass Through Legs
H262004 Tongue Buckle Legs

XX-LARGE

H261005 Pass Through Legs
H262005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tool Belt, Tongue Buckle Legs (shown)



SMALL

H231101 Pass Through Legs
H232101 Tongue Buckle Legs

MEDIUM/LARGE

H231102 Pass Through Legs
H232102 Tongue Buckle Legs

X-LARGE

H231104 Pass Through Legs
H232104 Tongue Buckle Legs

XX-LARGE

H231105 Pass Through Legs
H232105 Tongue Buckle Legs



Retrieval Harness

Back and Shoulder D-Rings, Tongue Buckle Legs (shown)



SMALL

H241001 Pass Through Legs
H242001 Tongue Buckle Legs

MEDIUM/LARGE

H241002 Pass Through Legs
H242002 Tongue Buckle Legs

X-LARGE

H241004 Pass Through Legs
H242004 Tongue Buckle Legs

XX-LARGE

H241005 Pass Through Legs
H242005 Tongue Buckle Legs






LANYARD KEEPER
Keeps the lanyard secure and out of the way when not in use



D RING
Adjustable for optimal fit on different body sizes



STRAP KEEPERS
Keeps excess webbing organized and out of the way



PASS THROUGH CHEST BUCKLE
Easy and fast adjustment and fastening



LABEL PROTECTION
Durable cover easily reveals labels



IMPACT INDICATOR
Clearly shows if the harness has been involved in a fall



310 LB. RATED

LITEFIT comes with tongue buckle Legs Straps and is ideal when multiple workers use same harness, or convenient pass through buckles and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.

The patent pending relief handle will achieve gravity override in seconds.

PATENT PENDING
RELIEF HANDLE
POST-FALL ADJUSTMENT SYSTEM



Achieve gravity override in seconds, relieving the pressure on femoral arteries.

Standard Harness

Back D-Ring, Tongue Buckle Legs (shown)



SMALL

H311001 Pass Through Legs
H312001 Tongue Buckle Legs

MEDIUM/LARGE

H311002 Pass Through Legs
H312002 Tongue Buckle Legs

X-LARGE

H311004 Pass Through Legs
H312004 Tongue Buckle Legs

XX-LARGE

H311005 Pass Through Legs
H312005 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Pass Through Legs (shown)



SMALL

H321001 Pass Through Legs
H322001 Tongue Buckle Legs

MEDIUM/LARGE

H321002 Pass Through Legs
H322002 Tongue Buckle Legs

X-LARGE

H321004 Pass Through Legs
H322004 Tongue Buckle Legs

XX-LARGE

H321005 Pass Through Legs
H322005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H331001 Pass Through Legs
H332001 Tongue Buckle Legs

MEDIUM/LARGE

H331002 Pass Through Legs
H332002 Tongue Buckle Legs

X-LARGE

H331004 Pass Through Legs
H332004 Tongue Buckle Legs

XX-LARGE

H331005 Pass Through Legs
H332005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H361001 Pass Through Legs
H362001 Tongue Buckle Legs

MEDIUM/LARGE

H361002 Pass Through Legs
H362002 Tongue Buckle Legs

X-LARGE

H361004 Pass Through Legs
H362004 Tongue Buckle Legs

XX-LARGE

H361005 Pass Through Legs
H362005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tongue Buckle Legs, Tool Belt (shown)



SMALL

H332101 Tongue Buckle Legs

MEDIUM/LARGE

H332102 Tongue Buckle Legs


X-LARGE

H332104 Tongue Buckle Legs

XX-LARGE

H332105 Tongue Buckle Legs





PASS THROUGH CHEST BUCKLE

Easy and fast adjustment and fastening

IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall

LEG STRAP

Available with tongue buckles, ideal when multiple workers use same harness, or convenient pass through buckles

SLIDING BACK PAD

Adjustable for universal fit on different body sizes.

LANYARD KEEPER

Keeps lanyard end secure and out of the way when not in use



STRAP KEEPERS

Keeps excess webbing organized and out of the way

LABEL PROTECTION

Durable cover easily reveals labels



310 LB. RATED

Standard Harness



Back D-Ring
Tongue Buckle
Legs (shown)

UNIVERSAL

H411002
Pass Through Legs
H412002
Tongue Buckle Legs



Positioning Harness



Back and Hip
D-Rings
Pass Through
Legs (shown)

UNIVERSAL

H432002
Tongue Buckle Legs
H431002
Pass Through Legs



Construction Harness



Back and Hip D-Rings
Tongue Buckle Legs
Tool Belt
Removable Shoulder Pads

SMALL

H432101

MEDIUM/LARGE

H432102

X-LARGE

H432104

XX-LARGE

H432105



ARC FLASH HARNESS

Compatible with Arc Flash Lanyards on page 34. The Arc Flash Harness has built-in relief handles.

Standard Harness



Back D-Ring, Pass Through Legs

SMALL
H914001

MEDIUM/LARGE
H914003

X-LARGE
H914004

XX-LARGE
H914005



Positioning Harness



Back and Hip D-Rings, Pass Through Legs

SMALL
H934001

MEDIUM/LARGE
H934002

X-LARGE
H934004

XX-LARGE
H934005



Construction Harness



Back and Hip D-Rings, Pass Through Legs, Tool Belt

SMALL
H934101

MEDIUM/LARGE
H934102

X-LARGE
H934103

XX-LARGE
H934104



- Meets requirements of ASTM F887
- 1¾" Kevlar® Webbing
- Built in Relief Straps assist user to reach a gravity override seated position after a fall arrest
- Dielectric Hardware
- SIGMATM flame resistant (FR) Backpad, Waist pad and protective label cover

HI-VIZ HARNESS

The harness with a higher visibility web



Standard Harness

Back D-Ring, Tongue Buckle Legs (shown)

MEDIUM/LARGE
H112002XHV

X-LARGE
H112004XHV



Positioning Harness

Back and Hip D-Rings, Pass Through Legs

MEDIUM/LARGE
H132002XHV

X-LARGE
H132004XHV



Tool/Positioning Belt

Hip D-Rings



- SMALL**
M210001
- MEDIUM/LARGE**
M210003
- X-LARGE**
M210004
- XX-LARGE**
M210005

Belt with Pad



- SMALL**
M110001
- MEDIUM/LARGE**
M110003
- X-LARGE**
M110004
- XX-LARGE**
M110005

LiteFit Replacement Belt



- SMALL**
M610001
- MEDIUM/LARGE**
M610003
- X-LARGE**
M610004
- XX-LARGE**
M610005

ProForm/Blue Armor Replacement Belt



- SMALL**
M620001
- MEDIUM/LARGE**
M620003
- X-LARGE**
M620004
- XX-LARGE**
M620005

Shoulder Pads

M010001



D-Ring Extender

18" LENGTH
M010000



Leg Pads

M010005



DROP SAFETY EQUIPMENT

Protect your tools, property and workers below. Quickly attaches to existing tools and meets ANSI/ISEA 121-2018



Self Retracting Tool Tether

Polymer covered stainless steel cable
 Durable, impact resistant polycarbonate housing
 Stainless steel inner spring
 Anodized aluminum dual auto-locking carabiner
 8 oz. retraction force

Maximum workload capacity 1.5 lbs.
 Carabiner
 Polycarbonate Housing

EXTENDS UP TO 42"
 M430001

Maximum workload capacity 5 lb.
 Nylon strap
 Glass-filled ABS Housing

EXTENDS UP TO 60"
 M430005



Tool Tape

Activates and bonds as it stretches
 Use with Tool Attachments

1" X 120" ROLL
 M400001



Hard Hat Teather

Fits accessory slot on hard hat
 Attaches to hard hat with clamp
 Buckle end fits around shoulder strap
 (hard hat not included)

16" POLYESTER ELASTIC WEB
 M400004



D-Ring Tool Attachment

Quickly attaches to existing tools
 Polyester web
 Tether attachment: Stainless steel D-ring
 Maximum workload capacity 5 lbs.

14" LOOP TAPE
 M410001

12" CINCH TAPE
 M410002

6" STRAP
 M410003

Tool Tether

Heavy duty 15 lb tool capacity
 Durable nylon webbing stretch cord
 Carabiner end connector

30" - 50"
 M400003
 M400003-MP100 Bulk Pack



SELF RETRACTING LIFELINE BRANDS

MAX PATROL Self Retracting Lifelines



- Provides maximum freedom of movement with a higher line-lock performance
- First Leading Edge SRL approved for 3 different surfaces
- 400 lb rated capacity
- Meets the ANSI requirements of Class A
- Available in 10' length (Dyneema/Polyester)
- Available in 20', 30' & 50' lengths (Galvanized Cable)
Leading Edge available in 20', 30' & 65' lengths (Galvanized Cable)

BASELINE™



- The affordable alternative for small web SRLs
- Meets the ANSI requirements of Class B
- Available in 7' & 11' lengths (Dyneema/Polyester)



- Compact and lightweight personal SRL weighing less than 2.5 lbs
- Meets the ANSI requirements of Class A
- Available in Single and Twinleg models
- Available in 6' length (Dyneema/Polyester)
- Available in 8' Cable Models for Leading Edge use
- Available in Tie-Back Model
- 400 lb. Capacity per OSHA

AutoCoil 2™ SELF RETRACTING LIFELINE



- Longest length SRLs in Werner offering
- Select models available for anchoring below back D-Ring
- Meets the ANSI requirements of Class A & B
- Available in 7', 11', 18' & 50'; Dual Leg 7' (Dyneema/Polyester)
- Available in 10', 20' & 30', 60' lengths (Galvanized Cable)
- Available in 6' Arc Flash Rated Model

Max Patrol Leading Edge with 3/16" Galvanized Cable Lifeline and a double-locking Snaphook is approved for use over steel beam, precast concrete and B-Deck. It meets ANSI and OSHA Standards.

Supports worker up to 400 lbs in overhead use

Minimal Clearances
< 24" when used overhead

Lightweight &
Rugged Design

20', 30' and 65'
Working Lengths



- Approved for use over steel beam, precast concrete and b-deck.
- Minimizes Fall Arrest Distance to < 24" when used overhead
- Max Patrol Freedom of Movement with line-lock performance
- Impact Resistant Polymer Housing with swivel top
- Carrying handle for easy transport
- Durable labels and shock pack cover to aid inspection
- Supports workers up to 400 lbs.
- Meets ANSI z359.14-2014 SRD-LE
- Meets ANSI z359.14, Class A and OSHA Standards

Max Patrol Leading Edge

Polymer Housing, Carabiner, Double Locking Snaphook

20' LENGTH

R410020LE 9.3 lbs

30' LENGTH

R410030LE 9.9 lbs

65' LENGTH

R410065LE 18 lbs

Standard Compliance Leading Edge Use:

ANSI z359.14-2014 SRD-LE, 310 lbs. **OSHA** 1910 & 1926, 310 lbs.

Standard Compliance Overhead Use:

ANSI z359.14-2014 Class A, 310 lbs. **OSHA** 1910 & 1926, 400 lbs.

Max Patrol Self Retracting Lifelines provides maximum freedom of movement with a higher line-lock performance with a 400 lb rated capacity.

Max Patrol Web SRL

Dyneema®/Polyester with WebAlert™,
Nylon Housing, Carabiner

10' LENGTH

R330010 2.5 lbs

- Maximized freedom of movement
- Improved line-lock performance
- Compact and lightweight
- Can be connected at anchor or worn to the back D-ring of harness
- Durable WebAlert™ inspectable webbing makes edge wear and damage visible
- Swivel top with Carabiner included
- Minimize Fall Clearance to < 24"

ANSI Z359.14-2014, Class B OSHA 1910 & 1926



Max Patrol Cable SRL

Galvanized Cable, ThermoPlastic
Housing, Carabiner

20' LENGTH

R410020 2.5 lbs

30' LENGTH

R410030 7.9 lbs

50' LENGTH



R410050 15.8 lbs

- Robust line of 20', 30' and 50'
- Cable SRL's
- Improved line-lock performance
- Rugged design for durability in construction environments
- Spring cushion reduces impact on housing with retraction
- Indicating swivel Snaphook and swivel top with Carabiner included
- Carry-handle allows for easier transport

ANSI Z359.14-2014, Class A OSHA 1910 & 1926



Available in 7' & 11' lengths in Dyneema/Polyester, Baseline is the affordable alternative for small web SRLs. Meets the ANSI requirements of Class B.

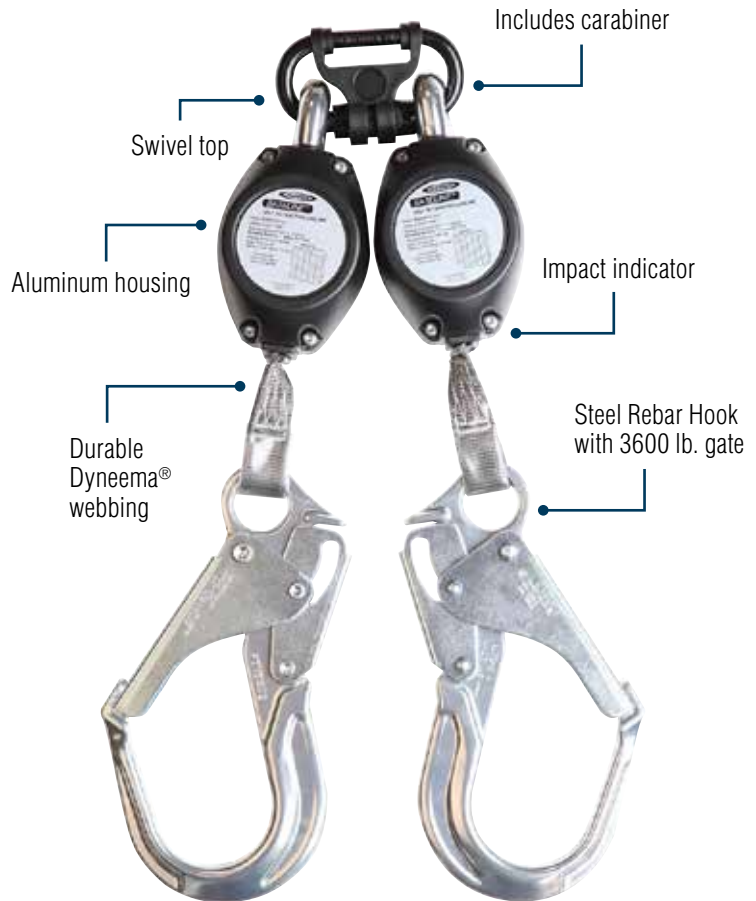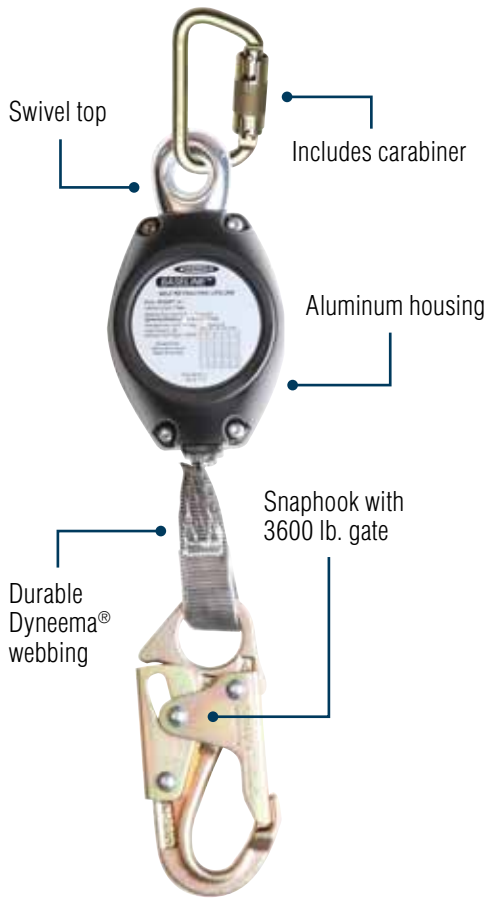

Baseline

Dyneema Lifeline, Aluminum Housing, Carabiner

7' LENGTH SNAPHOOK

R530007 3.5 lbs

7' LENGTH ALUMINUM REBAR

R530007-R 3.7 lbs

7' LENGTH STEEL REBAR

R530007-SR 4.0 lbs

11' LENGTH SNAPHOOK

R530011 4.0 lbs

11' LENGTH ALUMINUM REBAR

R530011-R 4.6 lbs

11' LENGTH STEEL REBAR

R530011-SR 4.8 lbs

- Internal braking mechanism keeps fall distance < 36"

Baseline Twinleg

Dyneema Lifeline, Aluminum Housing, Twinleg Carabiner

7' LENGTH SNAPHOOK

R531007 6.1 lbs

7' LENGTH ALUMINUM REBAR

R531007-R 7.0 lbs

7' LENGTH STEEL REBAR

R531007-SR 7.5 lbs

- Twinleg for 100% Tie-Off

- Twinleg Carabiner Adaptor connects through webbing under harness D-ring

- Aluminum rebar hooks with 3600 lb. gate

ANSI Z359.14-2014, Class B OSHA 1910 & 1926



LIGHTWEIGHT SAFETY IN THE PALM OF YOUR HAND

LEADING EDGE

Low profile and compact with integrated to harness versatility. Supports worker up to 400 lbs. and is tested and approved over steel. Meets ANSI z359.14 SRD-LE requirements. Minimal clearances and Class A < 24" when used overhead.



Leading Edge 8' Steel Cable

3/16" Galvanized Steel Cable
Thermoplastic Housing
Energy Absorbing Pack

SINGLE LEG

STEEL SWIVEL SNAPHOOK

R410008LE

ALUMINUM REBAR HOOK

R410008LE-R

STEEL FORM HOOK

R410008LE-SR

TWINLEG

STEEL SWIVEL SNAPHOOK

R413008LE

ALUMINUM REBAR HOOK

R413008LE-R

STEEL FORM HOOK

R413008LE-SR

TIE-BACK

Designed for versatility in allowing unit to tie back to itself around anchorage. Includes 3' of an outer sleeve and a 5,000 lb. gate rated Tie-Back hook.



9' Tie-Back

Dyneema® / Polyester Webbing
Impact Resistant Nylon
Carabiner
Steel Tie-Back Snaphook

SINGLE LEG

CARABINER

R430006TB

TWINLEG

TWINLEG CARABINER

R431006TB



Extremely compact and lightweight, weighing less than 2.5 lbs, Bantam 6 is made of durable Dyneema/Polyester and is available in Single and Twinleg models. Meets the ANSI requirements of Class A and 400 lb. capacity per OSHA.



6' Carabiner

Dyneema® / Polyester Webbing
Impact Resistant Nylon
Carabiner

SNAPHOOK

R430006 2.3 lbs

ALUMINUM REBAR

R430006-R 2.5 lbs

FORM HOOK

R430006-SR 3.3 lbs



6' Twinleg Carabiner

Dyneema® / Polyester Webbing
Impact Resistant Nylon
Twinleg Carabiner

SNAPHOOK

R431006 5.5 lbs

ALUMINUM REBAR

R431006-R 5.7 lbs

FORM HOOK

R431006-SR 7.6 lbs

**LIGHTWEIGHT
SAFETY IN
THE PALM OF
YOUR HAND**



AutoCoil 2 Self-Retracting Lifelines are designed to enhance safety performance and productivity. The right tool for the job with models ranging from 7 ft web to 60 ft galvanized cable giving the user the freedom to work and increase reach from a single anchor point.



- Security When Needed - Internal braking mechanism for reduced fall clearances
- Proven design meets applicable ANSI standards and OSHA regulatory requirements
- Extend life through Werner Retractable Repair and Maintenance Program



Dyneema®/ Polyester Web

Snaphook, Carabiner



Twinleg Dyneema®/ Polyester Web

Swivel Snaphook, Carabiner



Arc Flash Aramid

Snaphook, Carabiner


MODEL	LIFELINE LENGTH	LIFELINE MATERIAL	HOUSING MATERIAL	LIFELINE CONNECTOR	ANCHORAGE CONNECTOR	WEIGHT
R210010*	10'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	4.6 lbs
R210020**	20'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	7.2 lbs
R210030**	30'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	8.8 lbs
R210040**	40'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	11.4 lbs
R210060**	60'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	16.7 lbs
R213030**	30'	Galvanized Cable	Aluminum	Swivel Snaphook	Carabiner	9.7 lbs
R213060**	60'	Galvanized Cable	Aluminum	Swivel Snaphook	Carabiner	18.0 lbs
R230007*	7'	Dyneema® / Polyester	Aluminum	Snaphook	Carabiner	2.9 lbs
R231007*	Twinleg 7'	Dyneema® / Polyester	Aluminum	Swivel Snaphook	Carabiner	6.1 lbs
R231007-R*	Twinleg 7'	Dyneema® / Polyester	Aluminum	Rebar Hook	Carabiner	7.5 lbs
R230011*	11'	Dyneema® / Polyester	Aluminum	Snaphook	Carabiner	2.7 lbs
R230011-R*	11'	Dyneema® / Polyester	Aluminum	Rebar Hook	Carabiner	4.4 lbs
R230018**	18'	Dyneema® / Polyester	ThermoPlastic	Snaphook	Carabiner	4.8 lbs
R230050**	50'	Dyneema® / Polyester	ThermoPlastic	Snaphook	Carabiner	12.5 lbs
R290006*	6'	Arc Flash Aramid	Aluminum	Snaphook	Carabiner	4.4 lbs

*ANSI Z359.142012, Class B **ANSI Z359.142012, Class A

LANYARD BRANDS



DeCoil™
ENERGY ABSORBING LANYARD



WebAlert™
WebAlert inspectable polyester webbing makes wear and damage visible and obvious making inspection easier.



SoftCoil™
INTERNAL ENERGY ABSORBING LANYARD



SNAPHOOK
Double Locking Snaphook with gate rating of 3,600 lbs.




Positioning
NON ENERGY ABSORBING



DCELL™
SHOCK PACK
Werner DCELL Shock Pack is a deceleration device designed for controlled tearing action to reduce fall arrest forces on the user



ARC Flash



ELASTIC WEBBING
Contracts the lanyard length from 6' to 4', reducing the hazards of tripping, dragging, or snagging



IMPACT INDICATOR
Provides clear indication to users during inspection when lanyard has been involved in a fall and should be taken out of service

LANYARD END OPTIONS

All Werner Hooks are compliant with ANSI Z359 code.

SNAPHOOK



REBAR HOOK



2" GATE CARABINER



LOOP



LANYARD STYLES



NON ELASTIC SHOCK PACK ENERGY ABSORBING

These lanyards utilize a packed deceleration device (shock pack) designed for controlled tearing action to reduce fall arrest forces.



INTERNAL ENERGY ABSORBING

These lanyards feature a tubular, energy absorbing inner core that uses the entire length of the lanyard to absorb the energy of a fall and reduce the arresting forces on a user.



ELASTIC SHOCK PACK ENERGY ABSORBING

These lanyards utilize an energy absorbing device (shock pack) and have elastic webbing that contracts from 6' to 4' reducing the hazards of tripping, dragging, or snagging.



POSITIONING

These lanyards do not have any shock absorbing features and are only for work positioning or restraint applications.

LANYARD ATTRIBUTES



TIE-BACK

The tie-back feature allows these lanyards to act as both a connecting means and anchorage connector when no other acceptable anchor is available.



ADJUSTABLE

Adjustable in length to adapt to different working conditions.



TWINLEG (100% TIE-OFF)

Two lanyards connected together are meant for 100% tie-off, allowing the user to safely move from one location to another.



400#/12' FREE FALL

Dual purpose for either 400lb or 12' freefall applications.

DeCoil™

ENERGY ABSORBING LANYARD

DeCoil Snaphook

DCELL Shock Pack, 1" Web



3' SINGLE LEG

C311104

6' SINGLE LEG

C311100

6' TWINLEG

C411100

WebAlert™
INSPECTABLE WEBBING

DeCoil Rebar Hook

DCELL Shock Pack, 1" Web



6' SINGLE LEG

C311200

6' TWINLEG

C411200

WebAlert™
INSPECTABLE WEBBING

DeCoil Carabiner

DCELL Shock Pack, 1" Web



6' SINGLE LEG

C311400

6' TWINLEG

C411400

WebAlert™
INSPECTABLE WEBBING

DeCoil Soft Loop

DCELL Shock Pack, 1" Web, Loop



6' SINGLE LEG

C313100

6' TWINLEG

C413100

WebAlert™
INSPECTABLE WEBBING

DeCoil Tie-Back

DCELL Shock Pack, 1" Web



6' SINGLE LEG

C311701 Tie-Back

6' TWINLEG

C411701 Tie-Back

DeCoil Adjustable

DCELL Shock Pack, 1" Web



6' SINGLE LEG

C311102 Snaphook

6' TWINLEG

C411102 Snaphook

C411202 Rebar Hooks

WebAlert™
INSPECTABLE WEBBING

DeCoil 400# 12' Free Fall

DCELL Shock Pack, 1" Web



6'-12' SINGLE LEG

C311120 Snaphook
C311220 Rebar Hooks
C311721 Tie-Back

6' -12' TWINLEG

C411120 Snaphook
C411220 Rebar Hooks
C411721 Tie-Back

DeCoil Cable

DCELL Shock Pack, 1/4" Vinyl Coated Cable



6' SINGLE LEG

C361400 Snaphook/2" Carabiner
C361100 Snaphooks
C361200 Snaphook/Rebar Hook

6' TWINLEG

C461400 Snaphook/2" Carabiner
C461100 Snaphooks
C461200 Snaphook/Rebar Hook

DeCoil Stretch

DCELL Shock Pack, Elastic Web



4'-6' SINGLE LEG

C341100 Snaphooks
C341200 Snaphook/Rebar Hook

4'-6' TWINLEG

C441100 Snaphooks
C441200 Snaphook/Rebar Hook
C443100 Loop/Snaphook

WebAlert™
INSPECTABLE WEBBING

SoftCoil™

INTERNAL ENERGY ABSORBING LANYARD

SoftCoil

Energy Absorbing Inner Core, 2" Carabiner



6' SINGLE LEG
C351400 Snaphook

SoftCoil

Energy Absorbing Inner Core



6' SINGLE LEG
C351100 Snaphook
6' TWINLEG
C451100 Snaphook

SoftCoil

Energy Absorbing Inner Core, Loop



6' SINGLE LEG
C353100 Snaphook
6' TWINLEG
C453100 Snaphook

SoftCoil

Energy Absorbing Inner Core



6' SINGLE LEG
C351200 Snaphook
6' TWINLEG
C451200 Rebar Hook

Arc Flash

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Snaphook



6' SINGLE LEG
C811100
6' TWINLEG
C911100

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Loop, Snaphook



6' SINGLE LEG
C813100
6' TWINLEG
C913100

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Snaphook, Rebar Hook



6' SINGLE LEG
C811200
6' TWINLEG
C911200

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Loop, Rebar Hook



6' SINGLE LEG
C813200
6' TWINLEG
C913200

Positioning

NON ENERGY ABSORBING

Positioning

1" Web, Snaphook, Rebar Hook



6' SINGLE LEG
C111206

WebAlert™
INSPECTABLE WEBBING

Positioning

1" Web, Loop, Snaphook



6' SINGLE LEG
C113106

WebAlert™
INSPECTABLE WEBBING

Positioning

1/4" Vinyl Coated Cable, Snaphook



2' LENGTH
C161102

3' LENGTH
C161103

4' LENGTH
C161104

6' LENGTH
C161106

Positioning

1" Web, 2 Snaphook



2' LENGTH
C111102

3' LENGTH
C111103

4' LENGTH
C111104

5' LENGTH
C111105

6' LENGTH
C111106

WebAlert™
INSPECTABLE WEBBING

Positioning Adjustable

1" Web, Snaphook



6' SINGLE LEG
C111506

WebAlert™
INSPECTABLE WEBBING

Rebar Positioning

Web, 2 Snaphook, Rebar Hook



18" LENGTH
C111203

22" LENGTH
C111204

Rebar Positioning

Chain, 2 Snaphook, Rebar Hook



18" LENGTH
C191203

22" LENGTH
C191204

I-BEAM/STEEL

I-Beam Sliding Anchor

Lightweight aluminum design

FITS BEAMS 3.5" - 14"
< 1.25" THICK
A550000

FITS BEAMS 12" - 30"
< 2.5" THICK
A550030



Fixed Beam Anchor

FITS FLANGES 4" - 14"
< 7/8" THICK
A460000



I-Beam Trolley Anchor

Lightweight aluminum design for smooth travel along beam

FITS BEAMS 3" - 10" < 7/8" THICK
A450000



Builders Grip

FITS HOLE
3/4" - 1 1/4" DIAMETER
MAXIMUM 1 1/4"
THICK MATERIAL
A420000



D-Bolt Anchor

Integrated bolt with washer and nut
1/2" STUD DIAMETER
MAXIMUM 1" THICK MATERIAL
A320002



Hand Grip Anchor

4" WIRE
A100204



D-Bolt Anchor

For 5/8" diameter fastener
(not included)
A320001



Mega-Swivel Steel Anchor

Swivel Top Design

DRILL HOLE 5/8"
MINIMUM 1/4"
THICK STEEL
A320003

REPLACEMENT
STEEL BOLTS
10/PK
A320004



CONCRETE

Reusable Concrete Anchor


Easily Insert and Remove from Pre-drilled 3000 psi Concrete

DRILL HOLE 3/4" X 3" DEEP

A510000 5,000lbs

DRILL HOLE 1" X 4.5" DEEP


A510010 10,000lbs



Parapet Wall Anchor

14.5" MAXIMUM WALL THICKNESS

A567000

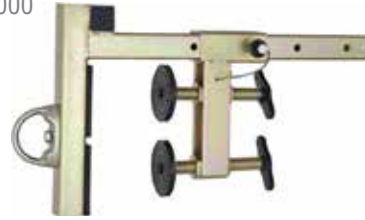

Toggle Bolt Anchor

Reusable Anchor for Hollow Core Concrete and for Steel Beams

DRILL HOLE 3/4"

A410000



Concrete Hybrid Anchor

Easily insert and remove from pre-drilled 3000 psi concrete

**REUSABLE ANCHOR
HEAVY-DUTY SWIVEL TOP
DRILL HOLE 1" X 5" DEEP**

A510002



Pour-In Disposable Anchor Strap

Loop, D-Ring

24" LENGTH

A211002

36" LENGTH

A211003

48" LENGTH

A211004

72" LENGTH

A211006



Straight Loop Insert Anchor

Easily to use, permanent anchor system for cast in place

**STRAIGHT LOOP
INSERT ANCHOR/25 PK**

A510021

SWIVEL STRAIGHT LOOP BOLT

A510022

**STRAIGHT LOOP BOLT
ASSY/25 PK**

A510023



Pour-In Disposable Anchor Strap

Loop, Loop

36" LENGTH

A211103

48" LENGTH

A211104

72" LENGTH

A211106



10K Mega-Swivel Concrete Anchor

Easily insert and remove from pre-drilled 3000 psi concrete, Minimum 5" concrete thickness

**HEAVY-DUTY SWIVEL TOP
DRILL HOLE 3/4" X 4.5" DEEP**

A510001

**10K REPLACEMENT
CONCRETE BOLTS/10 PK**

A510004



ROOF & TIE-OFF

Permanent Roof Anchor

For new construction or repairs.
Stainless steel design for extended service life

12" FOR TILE ROOFS

A220300

20" FOR TILE ROOFS

A220330



Reusable Roof Anchor

Plated steel with D-Ring now approved for metal decking 24 gauge or thicker

A210400



Knock Down Roof Anchor

A230400/12 Pk



Single Piece Roof Anchor

Stainless steel design for extended service life

A728200



Cable Choker

5/16" vinyl coated cable, O-Rings

2' LENGTH

A112002

6' LENGTH

A112006

8' LENGTH

A112008

3' LENGTH

A112003

4' LENGTH

A112004



Anchor Extension

1/4" vinyl coated cable, O-Ring, Snaphook

2' LENGTH

A113002

3' LENGTH

A113003

4' LENGTH

A113004



Drop-Through Anchor

4" PLATE

A710004-6

6" PLATE

A710006-6

12" PLATE

A710012-6



Cross Arm Strap

Web, Loop, D-Ring, 3" Wear Pad

2' LENGTH

A111102

4' LENGTH

A111104

8' LENGTH

A111108

3' LENGTH

A111103

6' LENGTH

A111106

10' LENGTH

A111110



Cross Arm Strap

Web, O-Ring, D-Ring, 3" Wear Pad

2' LENGTH

A111002

6' LENGTH

A111006

10' LENGTH

A111010

3' LENGTH

A111003

8' LENGTH

A111008

12' LENGTH

A111012

4' LENGTH

A111004



ANCHOR ACCESSORIES

Twinleg Carabiner Adaptor

A100341



Carabiner

3600 lb. Gate

3/4" GATE OPENING

A100301

2" GATE OPENING

A100303



HORIZONTAL LIFELINES

Temporary Rope Horizontal Lifeline

Lightweight, compact and durable



MODEL	LIFELINE LENGTH	DESCRIPTION	ANCHOR
L100030	30'	2-Man HLL	Cross Arm Strap
L100060	60'	2-Man HLL	Cross Arm Strap
L100100	100'	2-Man HLL	Cross Arm Strap
L102030	30'	2-Man HLL	Cross Arm Strap & Ratchet
L102060	60'	2-Man HLL	Cross Arm Strap & Ratchet
L102100	100'	2-Man HLL	Cross Arm Strap & Ratchet
L120030	30'	2-Man HLL	D-Bolt Anchors
L120060	60'	2-Man HLL	D-Bolt Anchors
L120100	100'	2-Man HLL	D-Bolt Anchors
L122030	30'	2-Man HLL	D-Bolt Anchors & Ratchet
L122060	60'	2-Man HLL	D-Bolt Anchors & Ratchet
L122100	100'	2-Man HLL	D-Bolt Anchors & Ratchet

Cable Horizontal Lifeline

CROSS ARM STRAPS

L103030, L103060




D-BOLT ANCHOR

L123030, L123060



MODEL	LIFELINE LENGTH	DESCRIPTION	ANCHOR
L103030	30'	2-Man Cable	A111104 Cross Arm Strap
L103060	60'	2-Man Cable	A111104 Cross Arm Strap
L123030	30'	2-Man Cable	A320001-WB D-Bolt Anchors
L123060	60'	2-Man Cable	A320001-WB D-Bolt Anchors
L153030	30'	2-Man Cable	N/A
L153060	60'	2-Man Cable	N/A
L163030	30'	Replacement Cable Assembly	N/A
L163060	60'	Replacement Cable Assembly	N/A
L400001	N/A	Concrete HLL Stanchion	N/A
L400002	N/A	Cast for Concrete HLL Stanchion	N/A
L400003	N/A	Intermediate HLL Stanchion	N/A

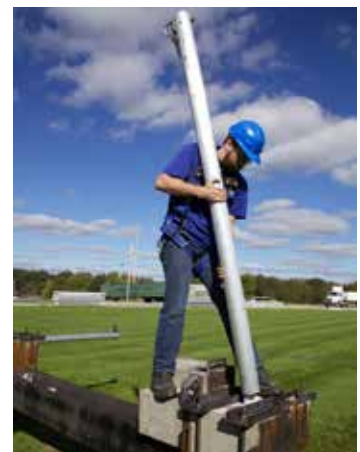

Concrete HLL Stanchion L400001

VERTICAL LIFELINES

Trailing Rope Grab

FOR 5/8" ROPE

L240000 (Stainless Steel)
L250000 (Steel)




Trailing Rope Grab

Shock Absorbing Lanyard, 3'

FOR 5/8" ROPE

L240001 (Stainless Steel)
L250001 (Steel)

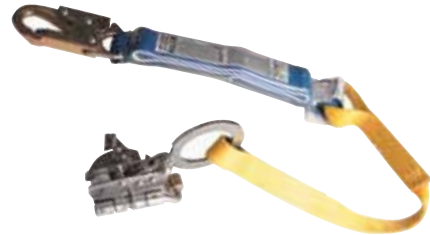

Manual Rope Adjuster

FOR 5/8" ROPE

L210100



Manual Rope Adjuster

Shock Absorbing Lanyard, 3'

FOR 5/8" ROPE

L210106



Vertical Lifeline

5/8" Poly Blend Rope



Rope Termination Plate

TERMINATION FOR 5/8" ROPE

A310000



30' LENGTH
L201030

100' LENGTH
L201100

200' LENGTH
L201200

300' LENGTH
L201300

35' LENGTH
L201035

125' LENGTH
L201125

225' LENGTH
L201225

325' LENGTH
L201325

50' LENGTH
L201050 (shown)

150' LENGTH
L201150

250' LENGTH
L201250

350' LENGTH
L201350

75' LENGTH
L201075

175' LENGTH
L201175

275' LENGTH
L201275

BULK 600' SPOOL
L201600B



Personalize your fall protection equipment with custom logo capability on tool bags and harnesses. Aerial Kits and Harnesses have an option to have a custom logo applied.



BAG LOGO SPECIFICATIONS

5" High x 5" Wide
Two colors maximum
One side of bag only, other side contains the Werner Logo



HARNESS LOGO SPECIFICATIONS

(Eligible only on LiteFit and BaseWear Harness Styles)
1.5" High x 4.5" Wide
Two colors maximum
On Harness Back Strap

LOGO MINIMUM ORDER REQUIREMENTS: Minimum 25 piece opening order required for logoed kits. Minimum 10 pieces required for reorders.

URMARK KITS

These all-in-one kits cover a broad range of applications and take protection and productivity to the next level. Every job is different, as is the fall protection required to get the job done. Werner is committed to providing the right product solution for your needs.

K121013

Aerial Kit with BaseWear Std Harness, Pass Through Legs 6ft DeCoil Lanyard



HARNESS
H411002

LANYARD
C311100

K122023

Aerial Kit with BaseWear Std Harness, Tongue Buckle Legs 6ft SoftCoil Lanyard



HARNESS
H412002

LANYARD
C351100

AERIAL KIT TOOLBAG	HARNESS	LANYARD CONNECTOR	LEG STRAPS
K121013	H411002 Standard BaseWear	C311100 6' DeCoil	Pass Through
K122023	H412002 Standard BaseWear	C351100 6' SoftCoil	Tongue Buckle
K123033	H211002 Blue Armor 1000	C341100 6' DeCoil Stretch	Pass Through
K121043	H411002 Standard BaseWear	C411100 6' DeCoil Dual Leg	Pass Through
K121053	H411002 Standard BaseWear	C311101 6' DeCoil Tie-Back	Pass Through
H411002XC311100 COMBO	H411002 Standard BaseWear	C311100 6' DeCoil Attached	Pass Through
H411002XC311104 COMBO	H411002 Standard BaseWear	C311104 3' DeCoil Attached	Pass Through
H431002XC311100 COMBO	H431002 Positioning BaseWear	C311100 6' DeCoil Attached	Pass Through

AERIAL CARRY CASES

K120000
SMALL TOOL BAG
12" X 18"



K120001
LARGE TOOL BAG
24" X 16"



K120002
MEDIUM SIZE BACK PACK



ACCESS A HIGHER STANDARD.™

COMPLIANCE KITS

Roofing Kit



**BASEWEAR
HARNESS**

**REUSABLE STEEL
ROOF ANCHOR**

**ROPE ADJUSTER WITH 3'
SHOCK ABSORBING LANYARD**

**POLY BLEND
ROPE LIFELINE**

BUCKET KIT	DESCRIPTION	HARNESS	LANYARD CONNECTOR	LIFELINE	ANCHOR
K111101	Roofing/30'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201030 30' Polyblend Rope	A210400 Reusable Steel
K111201	Roofing/50'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel
K112101	Roofing/30'	H412002 BaseWear Tongue Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201030 30' Polyblend Rope	A210400 Reusable Steel
K112201	Roofing/50'	H412002 BaseWear Tongue Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel
K111204	Roofing Tool Bag/50'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel

Construction/Maintenance Kit



**BASEWEAR
HARNESS**


**SOFTCOIL 6' LANYARD
WITH SNAPHOOK**

**WEB 6' CROSS
ARM STRAP**

BUCKET KIT	DESCRIPTION	HARNESS	LANYARD CONNECTOR	ANCHOR
K121001	Construction/Maintenance	H411002 BaseWear Pass Through Buckle Leg Straps	C351100 6' SoftCoil	A111106 Web 6' Cross Arm Strap
K122001	Construction/Maintenance	H412002 BaseWear Tongue Buckle Leg Straps	C351100 6' SoftCoil	A111106 Web 6' Cross Arm Strap

RESCUE LADDER KIT

The Rescue Ladder System is designed for rescuing a worker in the event of a fall with minimal work force training by allowing the victim to quickly and efficiently climb to safety with the additional support from a patent pending belay system.

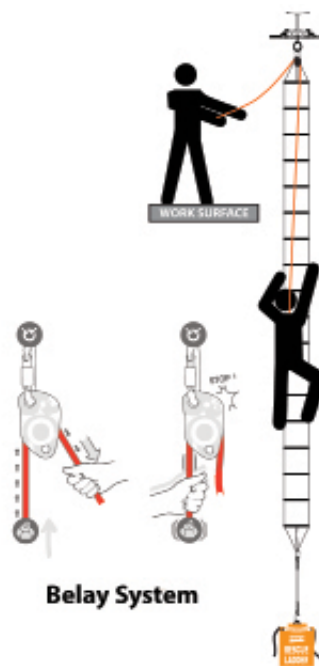

Rescue Ladder

- 18' length 2" Nylon Web
- Aluminum Rungs
- 11 mm Nylon Rope
- Progress Capture Pulley
- 1,600 lb Gate Carabiner

T340018



18' web ladder with belay assist



Portable and quick set up



Convenient ballistic nylon carry bag

TRAUMA STRAPS

The T320000 Suspension Trauma Relief Strap is designed to be used with a full body harness and helps relieve the discomfort of prolonged suspension after a fall arrest. The two piece design provides for quick and easy adjustment to fit users of all sizes, and is transferable from one harness to the next.




Suspension Trauma Relief Strap

- Attaches to any harness
- Two piece zipper case design
- Quick and easy length adjustment
- Transferable from one harness to another

T320000

7FT CONFINED SPACE TRIPOD SYSTEM

- Lightweight and portable
- Easy set up and tear down
- Integrated Pulley and Accessory option

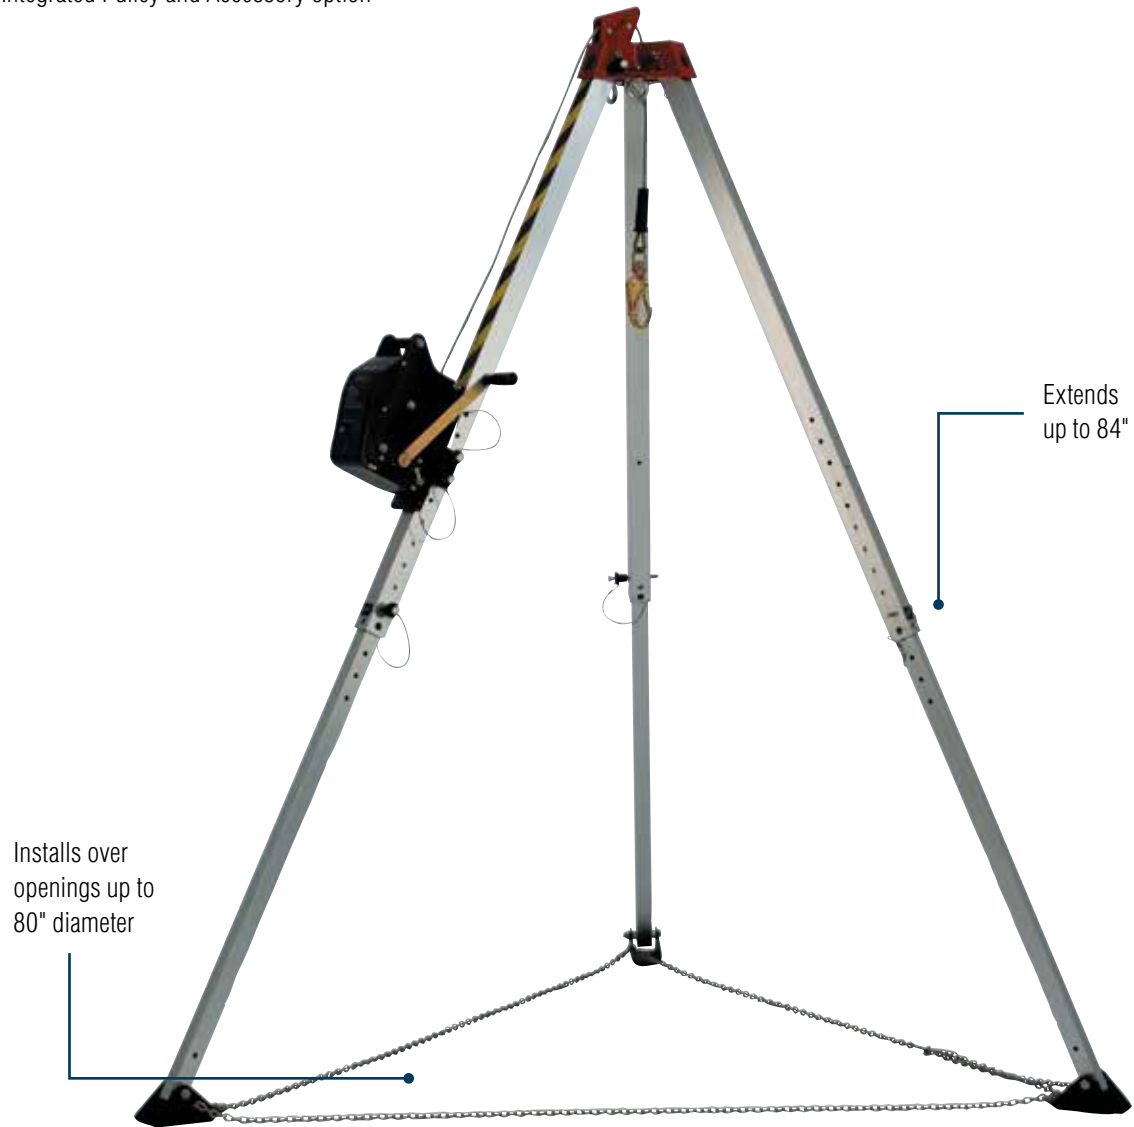

Lightweight Aluminum Design



60' & 100' 3-Way SRL



60' Material Hoist

TRIPOD COMPONENTS

T100009

7' Aluminum Tripod



T210060

60' 3-Way SRL



T210060B

60' 3-Way SRL Bracket




T510045

60' Material Hoist



T510000B

Material Hoist Bracket

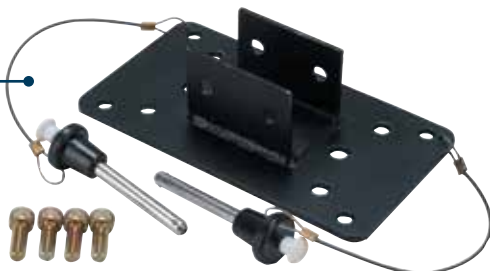

MODEL	DESCRIPTION
T210060B	60' 3-Way SRL Bracket
T210060	60' 3-Way SRL
T210100B	100' 3-Way SRL Bracket
T210100	100' 3-Way SRL
T510045	60' Material Hoist
T510000B	Material Hoist Bracket
T100009	7' Aluminum Tripod
T200001	Tripod Pulley

CUSTOM SYSTEMS

3-WAY SRL SYSTEM

MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T210060/T210060B	60' 3-Way SRL/Bracket
T200001	Tripod Pulley
A100301	Carabiner

HOIST SYSTEM

MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T510045	60' Material Hoist
T510000B	Material Hoist Bracket

3-WAY SRL/MATERIAL HOIST SYSTEM

MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T210060/T210060B	60' 3-Way SRL/Bracket
T510045	60' Material Hoist
T510000B	Material Hoist Bracket
T200001	Tripod Pulley
A100301	Carabiner



SAFETY TRAINING COURSES

Jobsite Fall Protection Safety Basic Training

This 1-3 hour course offers the A, B, C's of basic fall protection

- Tri-Pod demonstration of proper harness fitting, inspection, and fall recovery
- Wallet card certificate of completion

Authorized User Training

A partial day course designed for all workers at height who are required to have knowledge of safe use of fall protection equipment and systems.

- Identify proper equipment and systems selection
- Hands on exercises
- Wallet card certificate of completion

Competent Person Training Course

A comprehensive 2-day course Designed for managers of individuals working at height, including safety professionals or any key personnel responsible for supervision, implementation and monitoring of a managed fall protection program.

- Regulations relating to all fall protection topics
- Fall hazard survey and fall protection procedures
- Responsibilities of Competent Persons
- Detailed inspection of equipment components and systems
- Fall protection system assessments and determining when a system is unsafe
- Fall protection rescue procedures
- Lecture and extensive hands-on demonstrations and exercises
- Certificate of completion



Set Up Your Safety Training

Email: EndUserSpecialist@wernerco.com

In your email, indicate your location and desired training courses.

We will respond to set up a day and time.

ANSI/ASSE CODES

ANSI/ASSE Z359 Fall Protection Code

ANSI/ASSE Z359.0-2012	Definitions and Nomenclature Used For Fall Protection and Fall Arrest
ANSI/ASSE Z359.1-2016	The Fall Protection Code
ANSI/ASSE Z359.2-2017	Minimum Requirements for a Comprehensive Managed Fall Protection Program
ANSI/ASSE Z359.3-2017	Safety Requirements for Lanyards and Positioning Lanyards
ANSI/ASSE Z359.4-2013	Safety Requirements for Assisted-Rescue and Self-Rescue Systems, Subsystems and Components
ANSI/ASSE Z359.6-2009	Specifications and Design Requirements for Active Fall Protection Systems
ANSI/ASSE Z359.7-2011	Qualification and Verification Testing of Fall Protection Products
*ANSI/ASSE Z359.9-20XX	Personal Equipment for Protection Against Falls – Descending Devices
ANSI/ASSE Z359.11-2014	Safety Requirements for Full Body Harnesses
ANSI/ASSE Z359.12-2009	Connecting Components for Personal Fall Arrest Systems
ANSI/ASSE Z359.13-2013	Personal Energy Absorbers and Energy Absorbing Lanyards
ANSI/ASSE Z359.14-2014	Safety Requirements for Self-Retracting Devices for Personal Fall Arrest and Rescue Systems
ANSI/ASSE Z359.15-2014	Safety Requirements for Single Anchor Lifelines and Fall Arresters for Personal Fall Arrest and Rescue Systems
ANSI/ASSE Z359.16-2016	Safety Requirements for Climbing Ladder Fall Arrest Systems
*ANSI/ASSE Z359.17-20XX	Safety Requirements for Flexible Horizontal Lifelines for Personal Fall Protection Systems
*ANSI/ASSE Z359.18-2017	Safety Requirements for Anchorage Connectors for Active Fall Protection Systems
*ANSI/ASSE Z359.19-20XX	Safety Requirements for Rigid Horizontal Rail Anchorage Subsystems for Personal Fall Arrest Systems

* = not published

OSHA STANDARDS

OSHA Standard for General Industry

1910 Subpart D - Walking-Working Surfaces

- 1910.21 - Scope and definitions.
- 1910.22 - General requirements.
- 1910.23 - Ladders.
- 1910.24 - Step bolts and manhole steps.
- 1910.25 - Stairways.
- 1910.26 - Dockboards.
- 1910.27 - Scaffolds and rope descent systems.
- 1910.28 - Duty to have fall protection and falling object protection.
- 1910.29 - Fall protection systems and falling object protection-criteria and practices.
- 1910.30 - Training requirements.

1910 Subpart I - Personal Protective Equipment

- 1910.140 - Personal fall protection systems.

1910 Subpart J - General Environmental Controls

- 1910.146 - Permit-required confined spaces

1910 Subpart R - Special Industries

- 1910.268 Telecommunications
- 1910.269 Electric Power Generation, Transmission and Distribution

OSHA Standards for Construction

1926 Subpart E - Personal Protective Equipment

- 1926.105 Safety Nets

1926 Subpart L - Scaffolding

- 1926.451(g) – Fall Protection.
- 1926.453 - Aerial lifts.

1926 Subpart M - Fall Protection

- 1926.500 - Scope, application, and definitions applicable to this subpart.
- 1926.501 - Duty to have fall protection.
- 1926.502 - Fall protection systems criteria and practices.
- 1926.503 - Training requirements.

1926 Subpart R - Steel Erection

- 1926.760 - Fall protection.



CORPORATE HEADQUARTERS

Werner Co.

93 Werner Road

Greenville PA 16125-9499

Tel: 888 523 3371

To contact us please visit:

wernerco.com